


N= No Of Conductor


Note:
*Rohs: Yes
*儲存環境:16c~27c /
溼度 65RH%

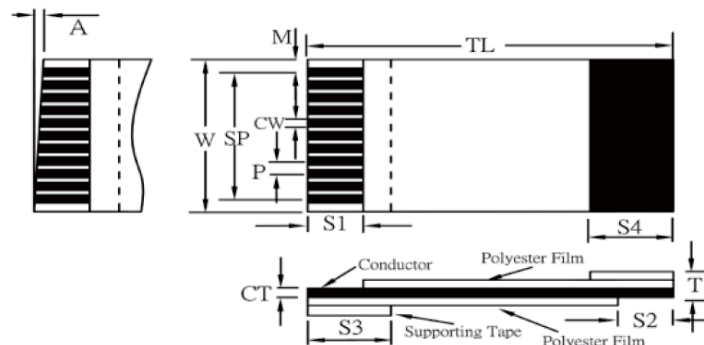

線材加工圖

加工項目:

- 1.第1/35/36共3條雙重PIN倒折於線身上,倒折長度約8mm左端先以導電布做固定
 - 2.線身全段包覆內導鋁箔麥拉
- 詳細內容參照下圖表示

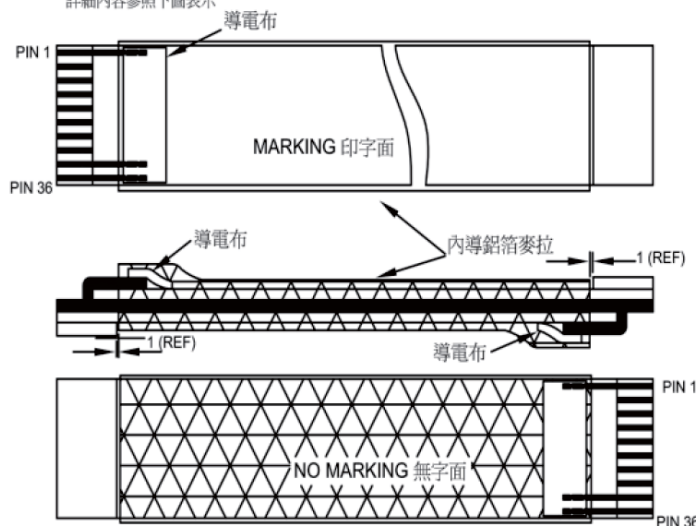

內導鋁箔麥拉結構表示圖



Dimension / 尺寸

Item / 項目	Symbol / 代號	Range / 尺寸	Tolerance / 公差
1 No of Conductors / 導體數目	N	36	/
2 Pitch / 導體間距	P	0.5	±0.05
3 Total Length / 總長度	TL	110	±2
4 Margin Width / 邊寬	M	0.5	±0.08
5 Terminal Thickness / 線端總厚度	T	0.30	±0.05
6 Contact Length / 接觸面長度	S1	4	±1
	S2	4	±1
7 Supporting Length / 補強板長度	S3	6	±1.5
	S4	6	±1.5
8 Total Width / 總寬度	W	18.50	±0.08
9 Total Pitch / 內部總間距	SP	17.50	±0.08
10 Slope / 切口斜度	A	0.0	<0.05

Material / 材料

Item / 項目	Specification / 規格	Remark / 備註
1 Insulation / 膠膜	UL20798 White 0.043	PET
2	White 0.043	PET
3 Support Tape / 補強板	Blue 0.225	PET
4 Conductor / Plating 導體 / 鍍層	Thickness (Ct) 0.035 Width (Cw) 0.3 Plated 1~3um Sn	±0.005 ±0.03
5 內導鋁箔麥拉	/ 40*96	1PCS
6 導電布	/ 17*5	2PCS
	/ / /	/
	/ / /	/
	/ / /	/
	/ / /	/

Charateristics / 特性表

UL STYLE 20798

Test Item / 測試項目	Testing Method / 測試方法	Specification / 規格
1 Conductor Resistance / 導體阻抗	JIS-C-3102(at20°C)	2.2 Ω/M MAX.
2 Insulation resistance / 絕緣阻抗	Apply the voltage of DC 500V for min	More than 1000MΩ 大於 1000MΩ
3 Dielectric Strength / 耐壓強度	AC 500V, 0.5Ma, 1分鐘,在空氣中相鄰兩導體	PASS
4 Continuity Test / 導通測試	Apply Test DC 3V	No open/Short Circuit
5 Rated Current / 額定電流	/	0.4A
6 Rated Voltage & Temperature / 額定電壓及溫度	UL Sub, 758	60V 80°C
7 Operating Temperature / 操作溫度	Fixed Wiring Condition	-40°C~85°C
8 Flammability Test / 耐燃性測試	UL Sub, 758 V W-1	PASS
9 Heat Resistance / 抗熱測試	85°C / 96 hrs	No Trouble with insulation Resistance and withstand voltage 絕緣電阻與耐電壓符合要求
10 Humidity Resistance / 抗濕測試	40°C , 95%RH, 96 hrs	
11 Temperature Cycling Test / 溫度循環測試	-40°C for 4hrs--85°C for 4hrs--25°C for 1hrs (5 cycle)	
12 Sliding Test / 柔性測試	R=Cable thickness	耐曲折測試≥30cycle
13	15mmR,70 cycle / min , 25mm 往復運動	耐曲折測試≥100,000cycle
14 Abrasion Test / 耐磨測試	Ø5mm,600g,60cycle/min	Min 10,000cycles 10,000回以上

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPV-CT36-110-LF
SERIES | LEADFREE
110mm
36 WAY
BOTH SIDE SHLD
CABLE

DESCRIPTION: 0.5PH 36PIN L=110mm D TYPE UL20798+3條雙重PIN+鋁箔