


單導鋁箔麥拉結構表示圖

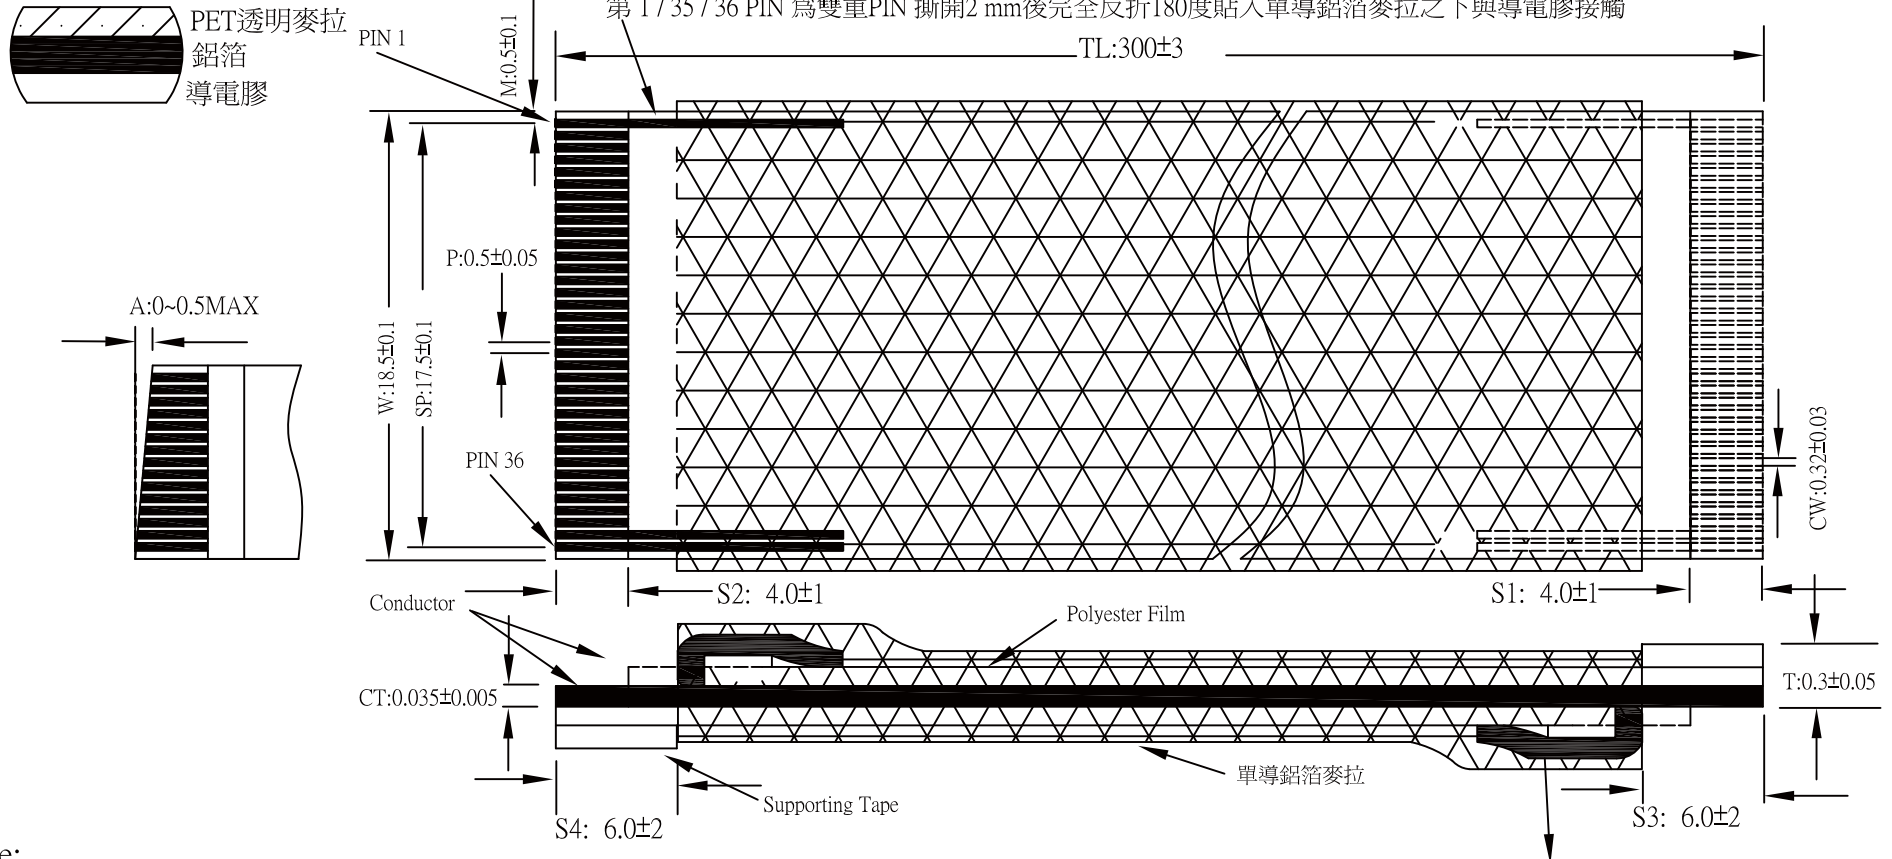

Note:

ROSH: YES

Operating Temperature: -30C~85C

Dielectric Strength: AC500V / 10ma / 1 min

Rated Current: 1A

儲存環境: 16C~27C / 濕度 65RH%

Material:

Insulation Film:

Polyester White

Supporting Tape:

Polyester Blue

Conductor:

Tin Plated Flat Copper Wire

EMI對策:

鋁箔麥拉+導電膠

第 1 / 35 / 36 PIN 為雙重PIN 撕開2 mm後完全反折180度貼入單導鋁箔麥拉之下與導電膠接觸

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X, ±

UNIT / mm

SCALE 1 : 1

.XX, ±

DATE

.XXX, ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

FPV-CT36-300-LF
SERIES | LEADFREE
300mm
36 WAY
BOTH SIDE SHLD
CABLE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 0.5PH 36PIN L=300mm D TYPE +鋁箔+3接地