
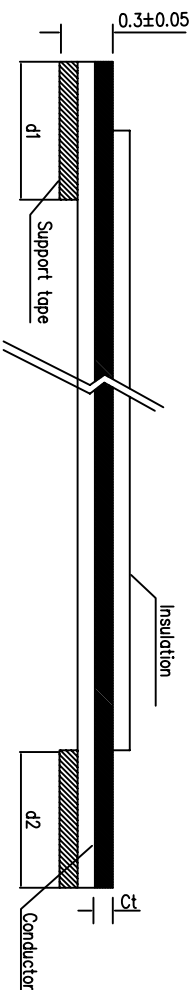



TOLERANCE	
Abbr.	P=0.5 P=0.8 P=1.0 P=1.25 P=2.5
P	±0.05 ±0.08 ±0.08 ±0.10 ±0.20
Pt	±0.08 ±0.10 ±0.10 ±0.15 ±0.20
W	±0.08 ±0.10 ±0.10 ±0.20 ±0.30
M	±0.08 ±0.15 ±0.15 ±0.20 ±0.30
Cw	±0.02 ±0.03 ±0.03 ±0.03 ±0.04
L	(30~100)±3, (101~300)±5, (301~600)±10, (length more than 601mm) ±15mm

TOLERANCE:

[illegible]

B	CORETHANALL CONNECTORS ASSEMBLIES		PART NO.		TOLERANCES ARE			
	DWG NO.		APPROVED BY CY					
	FILE NO.		DRAWING BY					
	UNIT / mm		SCALE 1 : 1					
A	煜倫有限公司		PROJECTION				X .XX .XXX AWG	
							DESCRIP TION:	
							FLAT FLEXIBLE CABLE (TERMINAL TYPE:T1)	
					AREA		REVISIONS	HK