

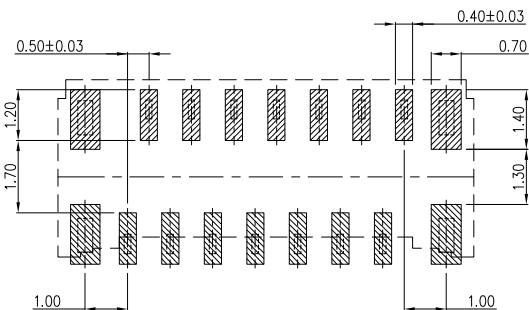
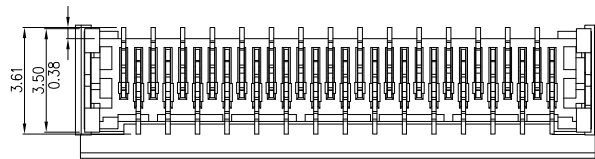
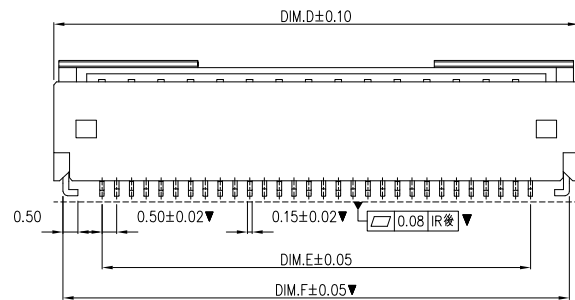
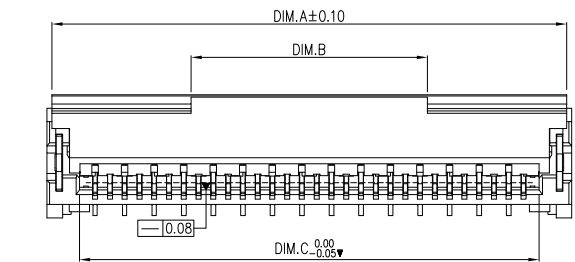


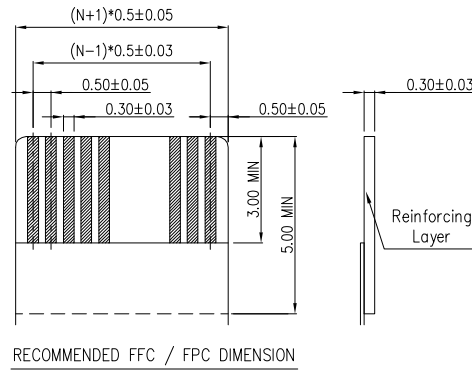

PCB LAYOUT

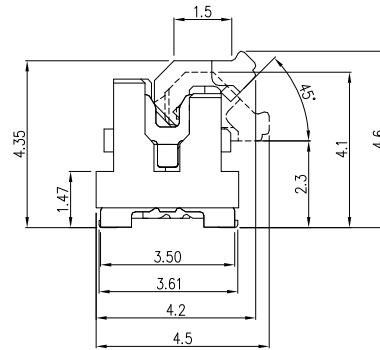

RECOMMENDED FFC / FPC DIMENSION

SPEC :

1. Housing: High-Temp Plastic, UL94-V
Color: Nature (Lvory) (LCP)
2. Locker: High-Temp Plastic, UL94-V
Color: Black (LCP)
3. Contact: Phosphor Bronze (C5191)
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
4. Solder Tab: BRASS (C2680)
5. Temperature Rating : -25°C ~ +85°C
6. Dielectric Withstanding Voltage : 500V AC/Min

● : 表示現有可提供PIN數

	PIN	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E	DIM.F		PIN	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E	DIM.F
	4	4.42	3.24	2.55	4.77	1.50	4.14		33	18.92	17.74	17.05	19.27	16.00	18.64
	5	4.92	3.74	3.05	5.27	2.00	4.64		34	19.42	18.24	17.55	19.77	16.50	19.14
	6	5.42	4.24	3.55	5.77	2.50	5.14		35	19.92	18.74	18.05	20.27	17.00	19.64
	7	5.92	4.74	4.05	6.27	3.00	5.64	●	36	20.42	19.24	18.55	20.77	17.50	20.14
	8	6.42	5.24	4.55	6.77	3.50	6.14		37	20.92	19.74	19.05	21.27	18.00	20.64
	9	6.92	5.74	5.05	7.27	4.00	6.64		38	21.42	20.24	19.55	21.77	18.50	21.14
	10	7.42	6.24	5.55	7.77	4.50	7.14	●	39	21.92	20.74	20.05	22.27	19.00	21.64
	11	7.92	6.74	6.05	8.27	5.00	7.64	●	40	22.42	21.24	20.55	22.77	19.50	22.14
	12	8.42	7.24	6.55	8.77	5.50	8.14	●	41	22.92	21.74	21.05	23.27	20.00	22.64
	13	8.92	7.74	7.05	9.27	6.00	8.64		42	23.42	22.24	21.55	23.77	20.50	23.14
	14	9.42	8.24	7.55	9.77	6.50	9.14	●	43	23.92	22.74	22.05	24.27	21.00	23.64
	15	9.92	8.74	8.05	10.27	7.00	9.64		44	24.42	23.24	22.55	24.77	21.50	24.14
	16	10.42	9.24	8.55	10.77	7.50	10.14	●	45	24.92	23.74	23.05	25.27	22.00	24.64
	17	10.92	9.74	9.05	11.27	8.00	10.64		46	25.42	24.24	23.55	25.77	22.50	25.14
	18	11.42	10.24	9.55	11.77	8.50	11.14		47	25.92	24.74	24.05	26.27	23.00	25.64
	19	11.92	10.74	10.05	12.27	9.00	11.64		48	26.42	25.24	24.55	26.77	23.50	26.14
	20	12.42	11.24	10.55	12.77	9.50	12.14	●	49	26.92	25.74	25.05	27.27	24.00	26.64
	21	12.92	11.74	11.05	13.27	10.00	12.64	●	50	27.42	26.24	25.55	27.77	24.50	27.14
	22	13.42	12.24	11.55	13.77	10.50	13.14		51	27.92	26.74	26.05	28.27	25.00	27.64
	23	13.92	12.74	12.05	14.27	11.00	13.64		52	28.42	27.24	26.55	28.77	25.50	28.14
	24	14.42	13.24	12.55	14.77	11.50	14.14	●	53	28.92	27.74	27.05	29.27	26.00	28.64
	25	14.92	13.74	13.05	15.27	12.00	14.64		54	29.42	28.24	27.55	29.77	26.50	29.14
	26	15.42	14.24	13.55	15.77	12.50	15.14		55	29.92	28.74	28.05	30.27	27.00	29.64
	27	15.92	14.74	14.05	16.27	13.00	15.64		56	30.42	29.24	28.55	30.77	27.50	30.14
	28	16.42	15.24	14.55	16.77	13.50	16.14		57	30.92	29.74	29.05	31.27	28.00	30.64
	29	16.92	15.74	15.05	17.27	14.00	16.64		58	31.42	30.24	29.55	31.77	28.50	31.14
	30	17.42	16.24	15.55	17.77	14.50	17.14	●	59	31.92	30.74	30.05	32.27	29.00	31.64
	31	17.92	16.74	16.05	18.27	15.00	17.64	●	60	32.42	31.24	30.55	32.77	29.50	32.14
	32	18.42	17.24	16.55	18.77	15.50	18.14								

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

FPV-VHAL46-xx-LF

SERIES

LEADFREE

04-60WAY

HIGH 4.6mm

L TYPE FOOT POSITION

180°SMT

SINGLE CONTACT

HINGED ZIF

DESCRIPTION: 0.5PH 4.6H 掀蓋立貼單接正腳位鍍金