



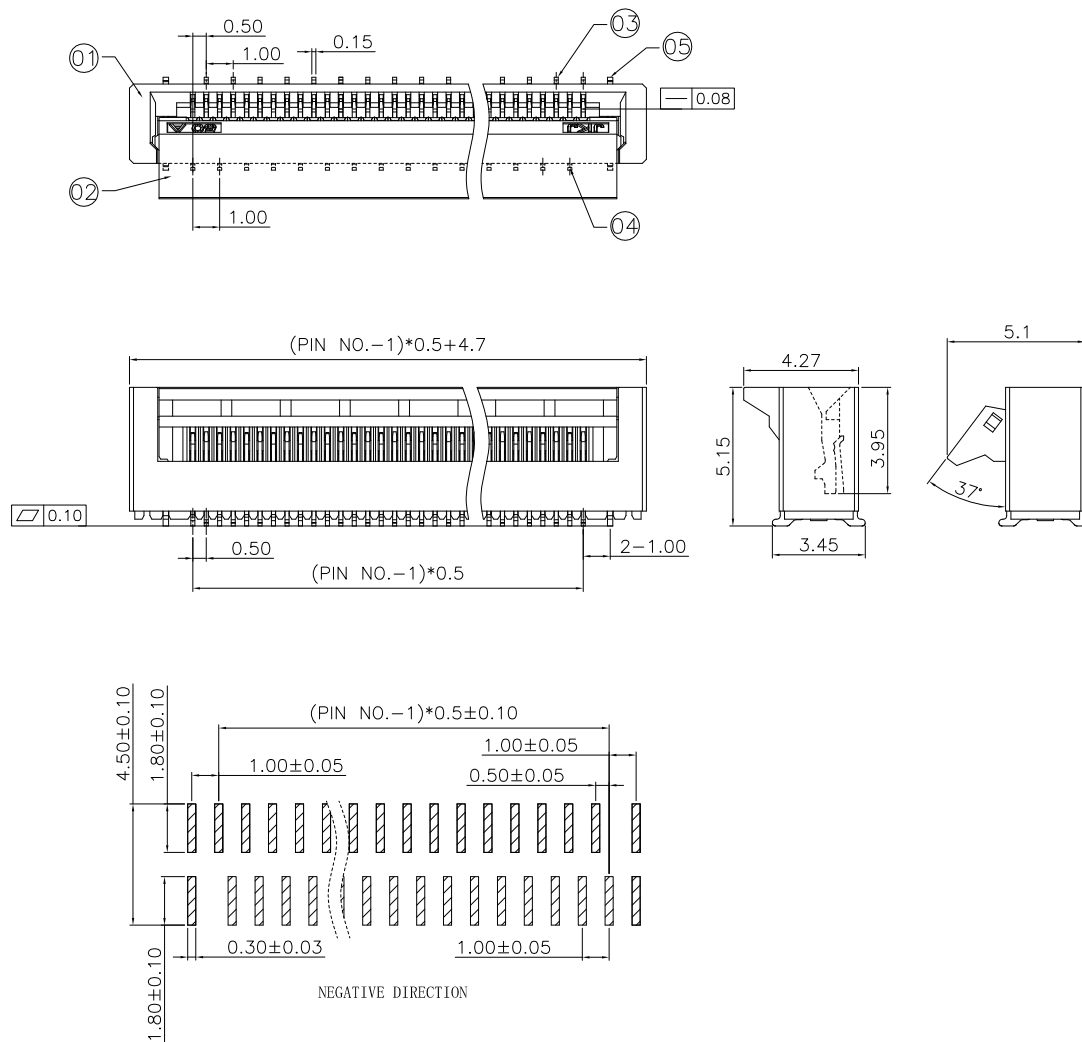

PC BOARD LAYOUT

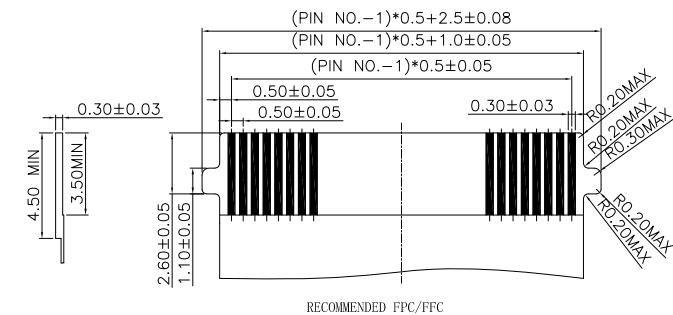

PIN位
10P
16P
18P
20P
21P
22P
24P
26P
30P
32P
35P
36P
40P
42P
45P
50P
60P

技术参数

额定电压:50V AC(rms)/DC

额定电流:0.5A AC(rms)/DC

接触电阻:20mΩ max(initial)

耐电压:200V AC/rms

绝缘电阻:500MΩ min

温度范围:-40℃~+105℃

NO.	NAME	MAT.L	FINISHI
01	HOU	LCP UL94 V0	BEIGR
02	LATCH	LCP UL94 V0	BLACK
03	TERA	C5191	NI AU
04	TERB	C5191	NI AU
05	TAP	C2680	NI SN

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

FPV-VHAR51FK-xx-LF

SERIES LEADFREE

04~60WAY

FPC LOCK

180°SMT HIGH 5.15mm

HINGED ZIF R TYPE FOOT POSITION

SINGLE CONTACT

DESCRIPTION: 0.5PH 5.15H 掀蓋立貼單接正反 腳位 鍍金 帶扣