
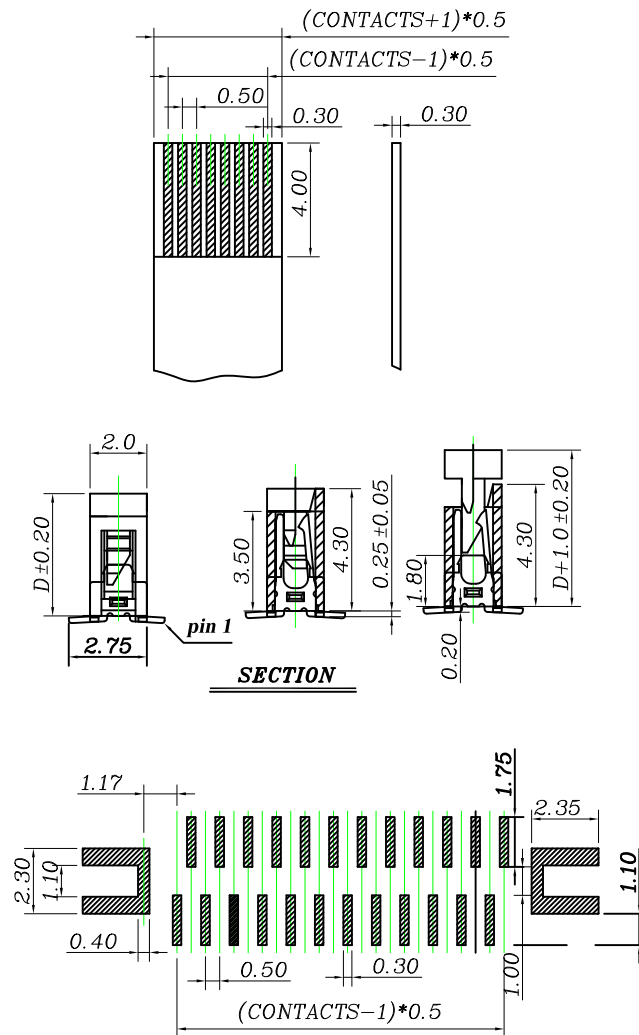


CKT	A	B	C	D	CKT	A	B	C	D
4	6.60	1.50	8.60	5.96	31	20.10	15.00	22.10	6.39
5	7.10	2.00	9.10	5.96	32	20.60	15.50	22.60	6.39
6	7.60	2.50	9.60	5.96	33	21.10	16.00	23.10	6.39
7	8.10	3.00	10.10	5.96	34	21.60	16.50	23.60	6.39
8	8.60	3.50	10.60	5.96	35	22.10	17.00	24.10	6.39
9	9.10	4.00	11.10	5.96	36	22.60	17.50	24.60	6.39
10	9.60	4.50	11.60	5.96	37	23.10	18.00	25.10	6.39
11	10.10	5.00	12.10	5.96	38	23.60	18.50	25.60	6.39
12	10.60	5.50	12.60	5.96	39	24.10	19.00	26.10	6.39
13	11.10	6.00	13.10	5.96	40	24.60	19.50	26.60	6.39
14	11.60	6.50	13.60	5.96	41	25.10	20.00	27.10	6.39
15	12.10	7.00	14.10	5.96	42	25.60	20.50	27.60	6.39
16	12.60	7.50	14.60	5.96	43	26.10	21.00	28.10	6.39
17	13.10	8.00	15.10	5.96	44	26.60	21.50	28.60	6.39
18	13.60	8.50	15.60	5.96	45	27.10	22.00	29.10	6.39
19	14.10	9.00	16.10	5.96	46	27.60	22.50	29.60	6.39
20	14.60	9.50	16.60	5.96	47	28.10	23.00	30.10	6.39
21	15.10	10.00	17.10	5.96	48	28.60	23.50	30.60	6.39
22	15.60	10.50	17.60	5.96	49	29.10	24.00	31.10	6.39
23	16.10	11.00	18.10	5.96	50	29.60	24.50	31.60	6.39
24	16.60	11.50	18.60	5.96	51	30.10	25.00	32.10	6.39
25	17.10	12.00	19.10	5.96	52	30.60	25.50	32.60	6.39
26	17.60	12.50	19.60	5.96	53	31.10	26.00	33.10	6.39
27	18.10	13.00	20.10	5.96	54	31.60	26.50	33.60	6.39
28	18.60	13.50	20.60	5.96	55	32.10	27.00	34.10	6.39
29	19.10	14.00	21.10	5.96	56	32.60	27.50	34.60	6.39
30	19.60	14.50	21.60	5.96	57	33.10	28.00	35.10	6.39
					58	33.60	28.50	35.60	6.39
					59	34.10	29.00	36.10	6.39
					60	34.60	29.50	36.60	6.39
					61	35.10	30.00	37.10	6.39
					62	35.60	30.50	37.60	6.39
					63	36.10	31.00	38.10	6.39
					64	36.60	31.50	38.60	6.39

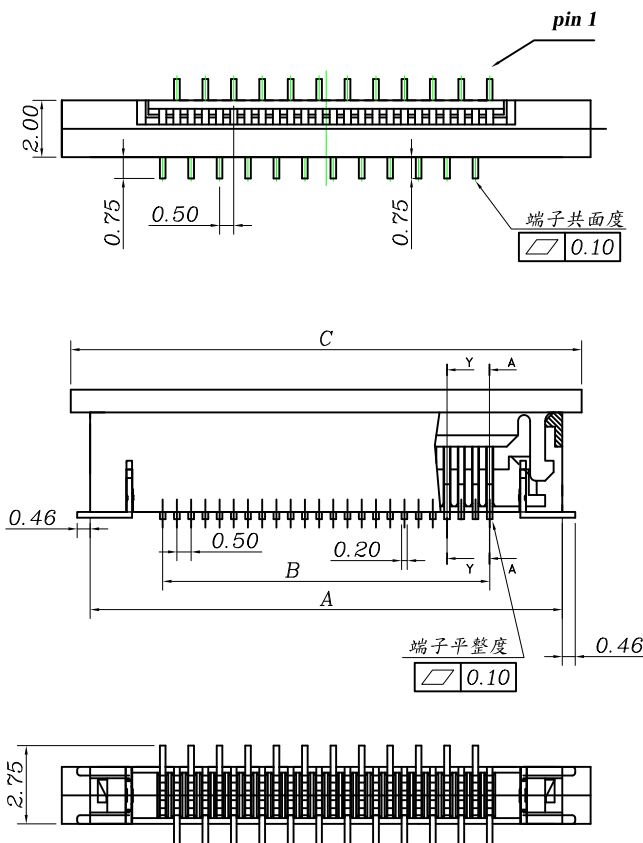

PC BOARD LAYOUT

Notes:

MATERIAL:

HOUSING : THERMALPLASTIC , HEATPROOF PLASTIC NY46-TE250F8 NC / UL 94V-0

COVER : THERMALPLASTIC , PA9T- GN2330 / UL 94V-0

CONTACT : PHOSPHOR BRONZE , C5191R-SH , T=0.20mm

HOLDDOWN: BRONZE H65 T=0.20mm

Ni PLATE : 1~3 um"

Tin COPPER PLATE : 2~5 um"

(銅/COPPER : 1~3%)

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

FPV-VZAL45-xx-LF

SERIES

180°SMT

ZIF

LEAD FREE

04~64WAY

HIGH 4.55mm

L TYPE FOOT POSITION

SINGLE CONTACT

DESCRIPTION: LOCK 0.5 PITCH 2.0H 抽屜式 90° 左接 CONNECT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com