


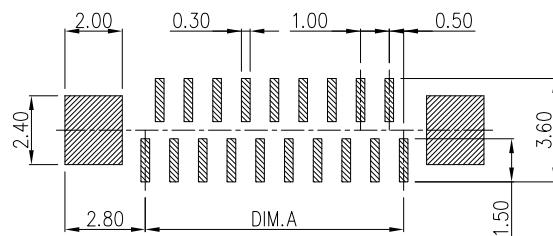



CAP PLACEMENT DIAGRAM




SPEC :


1. Housing: High-Temp Plastic, UL94-V
Color: Nature (Lvory) (PA46)
2. Locker: High-Temp Plastic, UL94-V
Color: Black (PA9T)
3. Contact: Phosphor Bronze (C5191)
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
4. Solder Tab: BRASS (C2680)
5. Temperature Rating : -25°C ~ +85°C
6. Dielectric Withstanding Voltage : 500V AC/Min

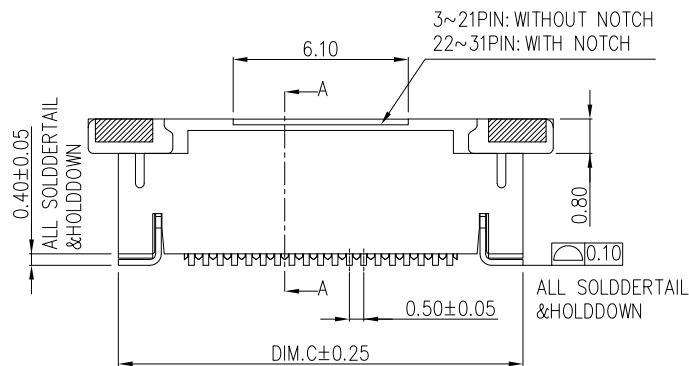

RECOMMENDED P.C.B. LAYOUT
TOLERANCE: ±0.05

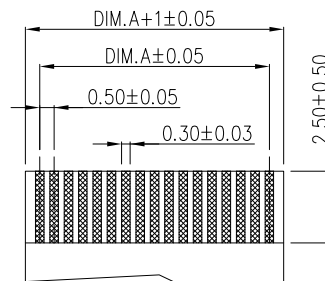

FFC/FPC DIMENSION
THICKNESS 0.30±0.03 mm



No. of contacts	Dimensions				
	A	B	C	D	E
31	15.00	16.10	20.10	22.20	5.10
32	15.50	16.60	20.60	22.70	5.10
33	16.00	17.10	21.10	23.20	5.10
34	16.50	17.60	21.60	23.70	5.10
35	17.00	18.10	22.10	24.20	5.10
36	17.50	18.60	22.60	24.70	5.10
37	18.00	19.10	23.10	25.20	5.10
38	18.50	19.60	23.60	25.70	5.10
39	19.00	20.10	24.10	26.20	5.10
40	19.50	20.60	24.60	26.70	5.10
41	20.00	21.10	25.10	27.20	5.10
42	20.50	21.60	25.60	27.70	5.10
43	21.00	22.10	26.10	28.20	5.10
44	21.50	22.60	26.60	28.70	5.10
45	22.00	23.10	27.10	29.20	5.10
46	22.50	23.60	27.60	29.70	5.10
47	23.00	24.10	28.10	30.20	5.10
48	23.50	24.60	28.60	30.70	5.10
49	24.00	25.10	29.10	31.20	5.10
50	24.50	25.60	29.60	31.70	5.10
51	25.00	26.10	30.10	32.20	5.10
52	25.50	26.60	30.60	32.70	5.10
53	26.00	27.10	31.10	33.20	5.10
54	26.50	27.60	31.60	33.70	5.10
55	27.00	28.10	32.10	34.20	5.10
56	27.50	28.60	32.60	34.70	5.10
57	28.00	29.10	33.10	35.20	5.10
58	28.50	29.60	33.60	35.70	5.10
59	29.00	30.10	34.10	36.20	5.10
60	29.50	30.60	34.60	36.70	5.10

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPV-VZAL51C-xx-LF
SERIES 180°SMT ZIF
LEADFREE 31~60WAY
CAP
HIGH 5.1mm
L TYPE FOOT
UPPER CONTACT

DESCRIPTION: 0.5PH 5.1H 抽屜立貼單接正腳位