

Electrical Characteristics:

Current rating: 0.4A AC/DC

Voltage rating: 50V AC/DC

Temperature range: -25°C~+85°C

Withstand Voltage: 200V AC/Minute

Contact Resistance: $\leq 20\text{m}\Omega$

Insulation resistance: $\geq 500\text{m}\Omega$

Relative Humidity: 93%+40°C



Material Description:

Terminal: Phosphor Bronze Tin-Leadplated

Fitting Nail: Brass Tin-plated

Housing: Thermoplastic(UL94V-0)

Slider: Thermoplastic(UL94V-0)

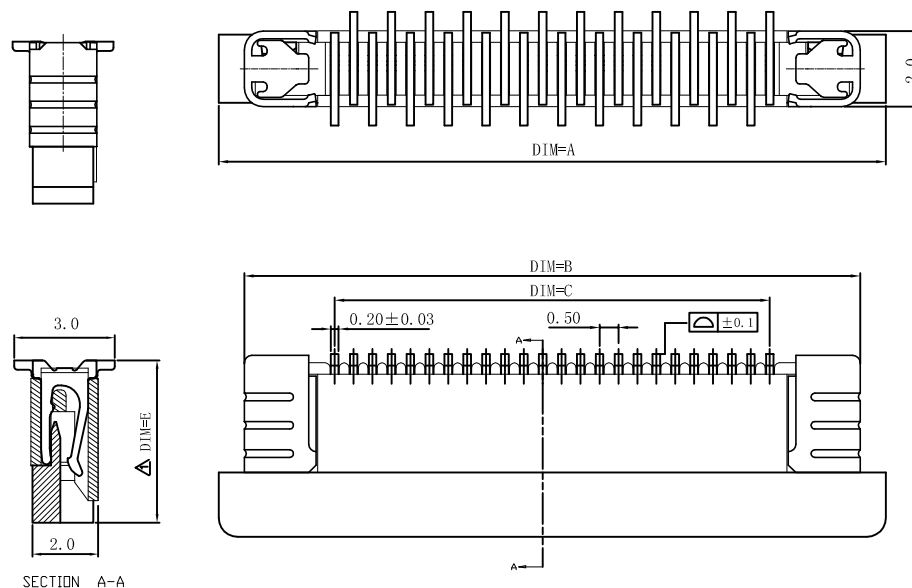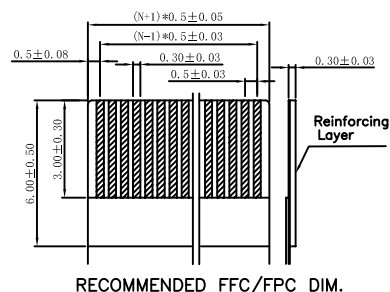


★ Have Produce Pin Number

POS.	A	B	C	D	E
★ 4	7.6	6.5	1.5	2.6	4.4
★ 5	8.1	7.0	2.0	3.1	
★ 6	8.6	7.5	2.5	3.6	
★ 7	9.1	8.0	3.0	4.1	
★ 8	9.6	8.5	3.5	4.6	
★ 9	10.1	9.0	4.0	5.1	
★ 10	10.6	9.5	4.5	5.6	
★ 11	11.1	10.0	5.0	6.1	
★ 12	11.6	10.5	5.5	6.6	
★ 13	12.1	11.0	6.0	7.1	
★ 14	12.6	11.5	6.5	7.6	
★ 15	13.1	12.0	7.0	8.1	
★ 16	13.6	12.5	7.5	8.6	
★ 17	14.1	13.0	8.0	9.1	
★ 18	14.6	13.5	8.5	9.6	
★ 19	15.1	14.0	9.0	10.1	
★ 20	15.6	14.5	9.5	10.6	
★ 21	16.1	15.0	10.0	11.1	
★ 22	16.6	15.5	10.5	11.6	

POS.	A	B	C	D	E
★ 23	17.1	16.0	11.0	12.1	4.4
★ 24	17.6	16.5	11.5	12.6	
★ 25	18.1	17.0	12.0	13.1	
★ 26	18.6	17.5	12.5	13.6	
★ 27	19.1	18.0	13.0	14.1	
★ 28	19.6	18.5	13.5	14.6	
★ 29	20.1	19.0	14.0	15.1	
★ 30	20.6	19.5	14.5	15.6	
★ 31	21.1	20.0	15.0	16.1	
★ 32	21.6	20.5	15.5	16.6	
★ 33	22.1	21.0	16.0	17.1	
★ 34	22.6	21.5	16.5	17.6	

NO.1 Contact

MYLAR

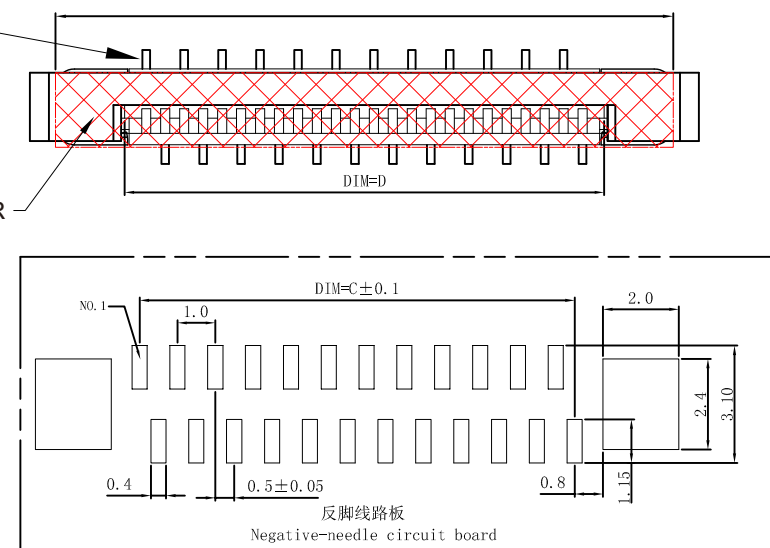

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.15
.XX ± 0.05
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPV-VZAR44C-xx-LF
SERIES
180°SMT
ZIF
LEADFREE
04~34WAY
MYLAR
HIGH 4.4mm
R TYPE FOOT
UPPER CONTACT

DESCRIPTION: (Pitch 0.5 mm) FFC/FPC Connector ZIF Straight Contact Type