



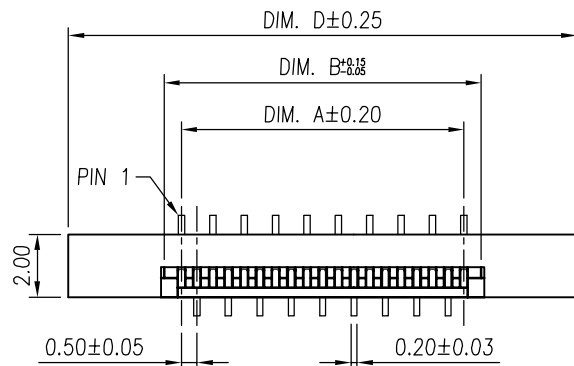
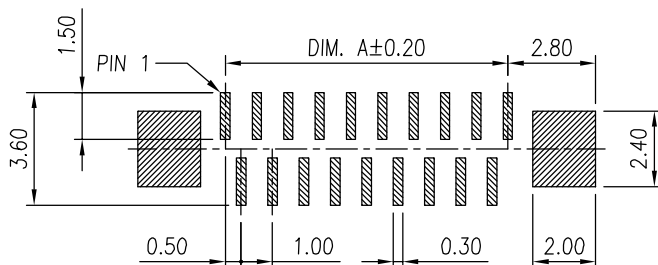





SECTION A-A

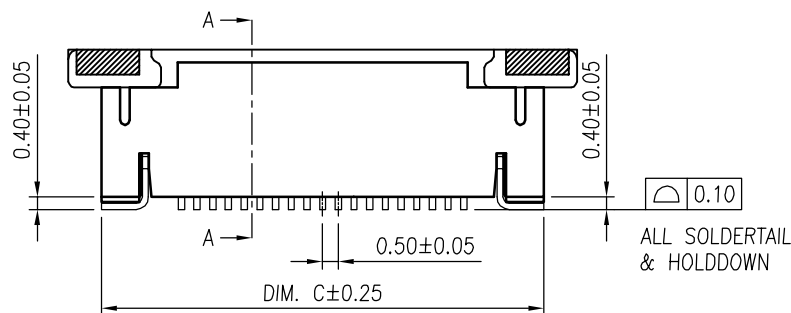

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

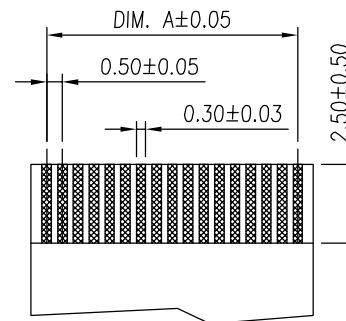

FFC/FPC DIMENSION
THICKNESS 0.30 ± 0.03 mm

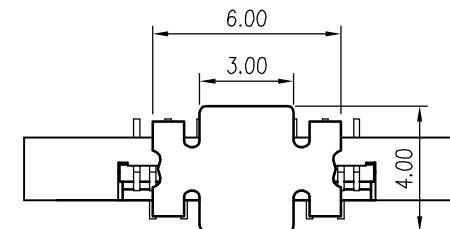

CAP PLACEMENT DIAGRAM

NOTE:

1.MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC.
ACTUATOR: HIGH TEMPERATURE THERMOPLASTIC.
TERMINAL: COPPER ALLOY.
HOLDDOWN: COPPER ALLOY.
CAP: COPPER ALLOY.

2.FINISH:

TERMINAL: 100u" MIN. TIN PLATING OR G/F GOLD PLATING WITH
50u" MIN. NICKEL UNDERPLATED OVERALL.
HOLDDOWN: 100u" MIN. TIN PLATING WITH
50u" MIN. NICKEL UNDERPLATED OVERALL.
CAP: 50u" MIN. NICKEL UNDERPLATED OVERALL.

FPV-VZAR47C-xx-LF
03~30WAY LEADFREE
RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FPV-VZAR47C-xx

DWG NO. FPV-VZAR47C-xx

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

X. $\pm$
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG


DESCRIPTION:

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

DATE

