



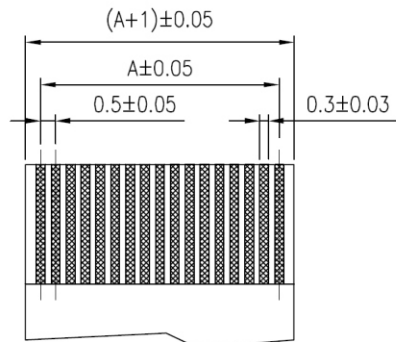


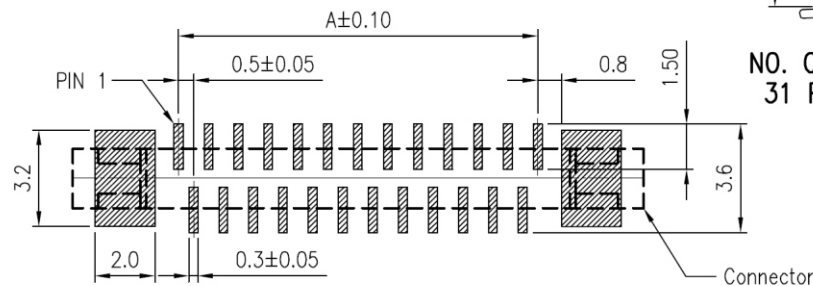


SECTION A-A

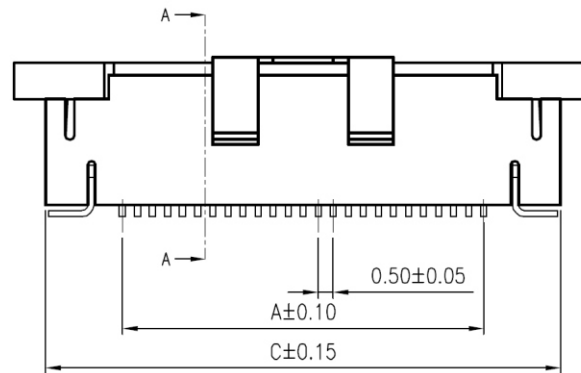



FFC/FPC DIMENSION
THICKNESS 0.30 mm

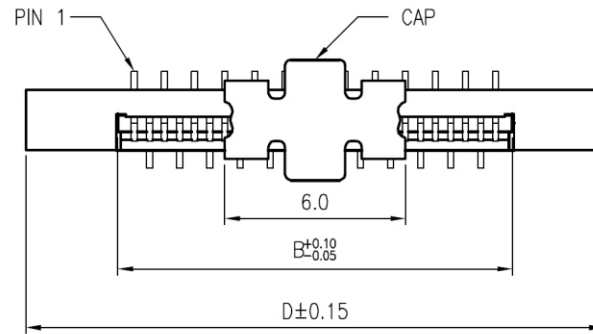

RECOMMENDED PCB LAYOUT



NO. OF CONTACTS
3 PIN~30 PIN



NO. OF CONTACTS
31 PIN~61 PIN

MATERIAL

HOUSING: HIGH-TEMP.
ACTUATOR: HIGH-TEMP.
CONTACT: PHOSPHOR BRONZE. PLATING: ALL TIN, LEAD FREE.
HOLDOWN: BRASS. PLATING: ALL TIN, LEAD FREE.
CAP: BRASS. PLATING: Ni.

ELECTRICAL

VOLTAGE: 50V MAX.
CURRENT: 0.5A MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC.
INSULATION RESISTANCE: 50 MEGAOHMS MIN.
CONTACT RESISTANCE: 20 MILLIOHMS MAX.

ENVIRONMENTAL

TEMPERATURE RANGE: -20°C TO 85°C.

FEATURE AND SPECIFICATIONS

SIZES 03 TO 61 PIN.
FOR 0.3mm THICKNESS FFC/FPC.

FPV-VZARC-xx-LF
LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. **FPV-VZARC-xx**

DWG NO. **FPV-VZARC-xx**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

