

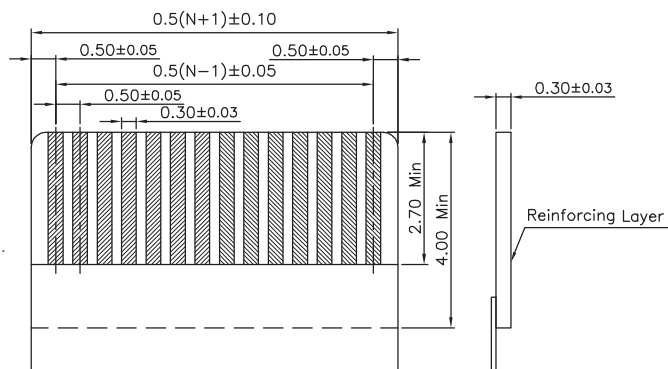
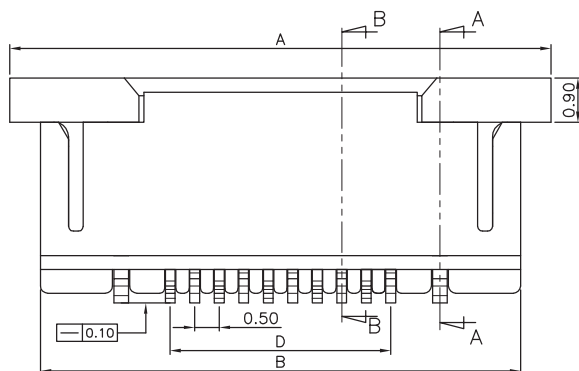
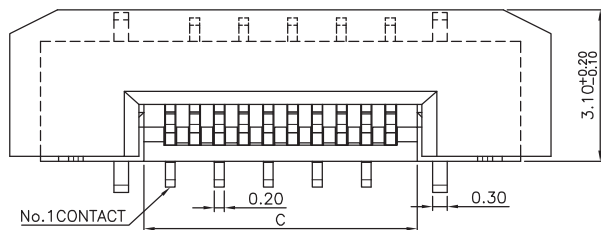






RECOMMENDED FFC/FPC DIMENSION

- 1.HOUSING MATERIAL:
ACTUATOR MATERIAL:
2.TERMINAL MATERIAL:
2-1.PLATED WITH BRIGHT TIN(100%) 100u"~200u"
2-2.PLATED WITH MATTE TIN(100%) 100u"~200u"
2-3.PLATED WITH GOLD MORE THAN 1u.
3.FITTING NAIL MATERIAL:
3-1.PLATED WITH BRIGHT TIN(100%) 100u"~200u"
3-2.PLATED WITH MATTE TIN(100%) 100u"~200u"





SECTION A-A

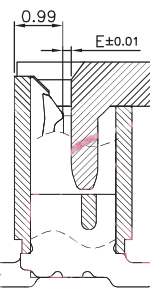

SECTION B-B

NO. of contacts (n)	Dimensions				
	A	B	C	D	E
4	8.10	6.85	2.60	1.50	0.14
5	8.60	7.35	3.10	2.00	
6	9.10	7.85	3.60	2.50	
7	9.60	8.35	4.10	3.00	
8	10.10	8.85	4.60	3.50	
9	10.60	9.35	5.10	4.00	
10	11.10	9.85	5.60	4.50	
11	11.60	10.35	6.10	5.00	
12	12.10	10.85	6.60	5.50	
13	12.60	11.35	7.10	6.00	
14	13.10	11.85	7.60	6.50	
15	13.60	12.35	8.10	7.00	0.15
16	14.10	12.85	8.60	7.50	
17	14.60	13.35	9.10	8.00	
18	15.10	13.85	9.60	8.50	
19	15.60	14.35	10.10	9.00	
20	16.10	14.85	10.60	9.50	
21	16.60	15.35	11.10	10.00	
22	17.10	15.85	11.60	10.50	
23	17.60	16.35	12.10	11.00	
24	18.10	16.85	12.60	11.50	
25	18.60	17.35	13.10	12.00	0.16
26	19.10	17.85	13.60	12.50	
27	19.60	18.35	14.10	13.00	
28	20.10	18.85	14.60	13.50	
29	20.60	19.35	15.10	14.00	
30	21.10	19.85	15.60	14.50	
31	21.60	20.35	16.10	15.00	
32	22.10	20.85	16.60	15.50	
33	22.60	21.35	17.10	16.00	
34	23.10	21.85	17.60	16.50	
35	23.60	22.35	18.10	17.00	
36	24.10	22.85	18.60	17.50	
37	24.60	23.35	19.10	18.00	0.16
38	25.10	23.85	19.60	18.50	
39	25.60	24.35	20.10	19.00	
40	26.10	24.85	20.60	19.50	
41	26.60	25.35	21.10	20.00	
42	27.10	25.85	21.60	20.50	
43	27.60	26.35	22.10	21.00	
44	28.10	26.85	22.60	21.50	
45	28.60	27.35	23.10	22.00	
46	29.10	27.85	23.60	22.50	
47	29.60	28.35	24.10	23.00	
48	30.10	28.85	24.60	23.50	
49	30.60	29.35	25.10	24.00	
50	31.10	29.85	25.60	24.50	

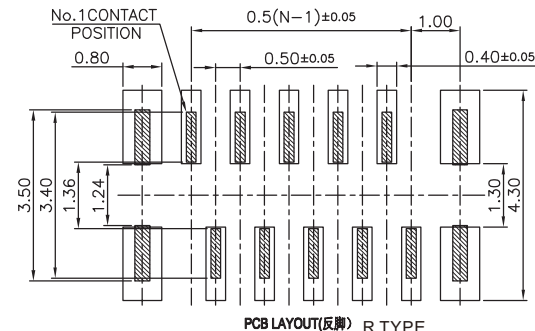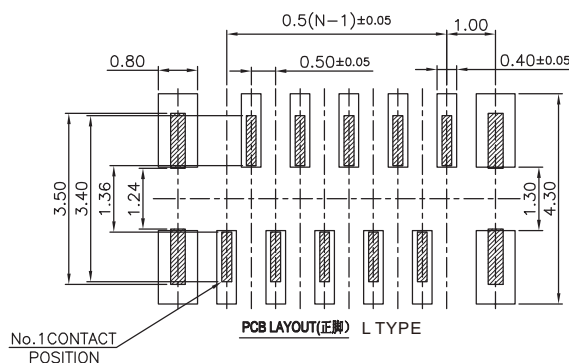

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPV-VZAx46-xx-LF

SERIES

180°SMT

ZIF

LEAD FREE

04~50WAY

HIGH 4.6mm

L: L TYPE FOOT POSITION

R: R TYPE FOOT POSITION

SINGLE CONTACT

DESCRIPTION: