
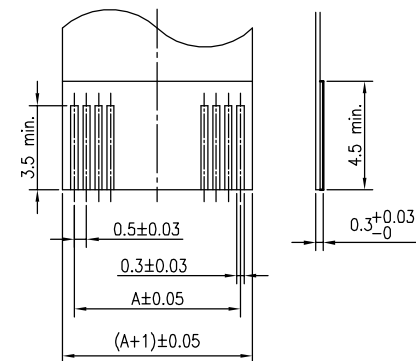
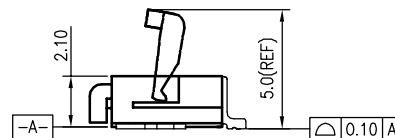


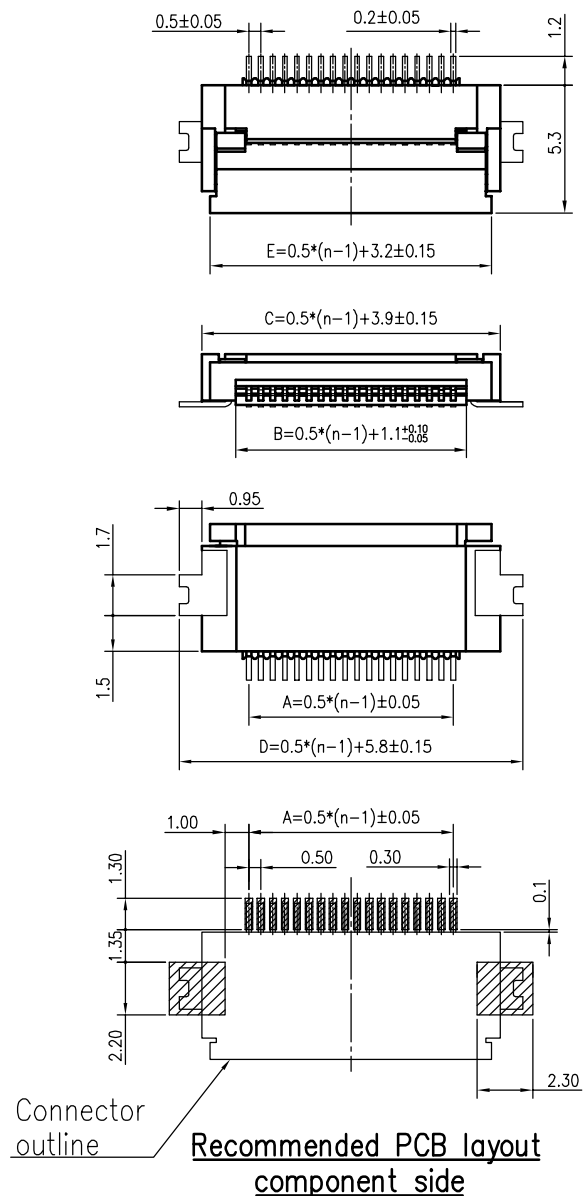

Applicable FPC/FFC recommended dimension

MATERIAL

HOUSING: PA46, UL94V-0, COLOR: NATURAL.

COVER: PA9T, UL94V-0, Color: Black.

CONTACT: PHOSPHOR BRONZE.

PLATING: ALL TIN, LEAD FREE, OR ALL GOLD.

HOLD DOWN: BRASS. PLATING: ALL TIN, LEAD FREE, OR ALL GOLD.

ELECTRICAL

VOLTAGE: 50V MAX.

CURRENT: 0.4A MAX.

DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC.

INSULATION RESISTANCE: 50 MEGAOHMS MIN.

CONTACT RESISTANCE: 20 MILLIOHMS MAX.

ENVIRONMENTAL

TEMPERATURE RANGE: -20°C TO 85°C .

FEATURE AND SPECIFICATIONS

SIZES 04 TO 50 PIN.

FOR 0.3mm THICKNESS FFC/FPC.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

照片框

ORDER INFORMATION

FPV-WHB-xx-LF

SERIES | | | LEADFREE
04-50WAY
BOTTOM CONTACT
HINGED ZIF
90°SMT

DESCRIPTION: FFC/FPC 0.5 PITCH CONNECTOR, ZIF SMT TYPE, BODY HIGH 2.0 mm.

Pin	Part Number	Dimension					Pin	Part Number	Dimension				
		A	B	C	D	E			A	B	C	D	E
* 4		1.50	2.60	5.40	7.30	4.70	* 28		13.50	14.60	17.40	19.30	16.70
5		2.00	3.10	5.90	7.80	5.20	29		14.00	15.10	17.90	19.80	17.20
* 6		2.50	3.60	6.40	8.30	5.70	* 30		14.50	15.60	18.40	20.30	17.70
7		3.00	4.10	6.90	8.80	6.20	31		15.00	16.10	18.90	20.80	18.20
* 8		3.50	4.60	7.40	9.30	6.70	* 32		15.50	16.60	19.40	21.30	18.70
* 9		4.00	5.10	7.90	9.80	7.20	* 33		16.00	17.10	19.90	21.80	19.20
* 10		4.50	5.60	8.40	10.30	7.70	* 34		16.50	17.60	20.40	22.30	19.70
11		5.00	6.10	8.90	10.80	8.20	* 35		17.00	18.10	20.90	22.80	20.20
* 12		5.50	6.60	9.40	11.30	8.70	* 36		17.50	18.60	21.40	23.30	20.70
13		6.00	7.10	9.90	11.80	9.20	37		18.00	19.10	21.90	23.80	21.20
* 14		6.50	7.60	10.40	12.30	9.70	38		18.50	19.60	22.40	24.30	21.70
* 15		7.00	8.10	10.90	12.80	10.20	39		19.00	20.10	22.90	24.80	22.20
16		7.50	8.60	11.40	12.30	10.70	* 40		19.50	20.60	23.40	25.30	22.70
* 17		8.00	9.10	11.90	13.80	11.20	41		20.00	21.10	23.90	25.80	23.20
* 18		8.50	9.60	12.40	14.30	11.70	42		20.50	21.60	24.40	26.30	23.70
* 19		9.00	10.10	12.90	14.80	12.20	43		21.00	22.10	24.90	26.80	24.20
* 20		9.50	10.60	13.40	15.30	12.70	44		21.50	22.60	25.40	27.30	24.70
* 21		10.00	11.10	13.90	15.80	13.20	* 45		22.00	23.10	25.90	27.80	25.20
22		10.50	11.60	14.40	16.30	13.70	46		22.50	23.60	26.40	28.30	25.70
23		11.00	12.10	14.90	16.80	14.20	47		23.00	24.10	26.90	28.80	26.20
* 24		11.50	12.60	15.40	17.30	14.70	48		23.50	24.60	27.40	29.30	26.70
* 25		12.00	13.10	15.90	17.80	15.20	49		24.00	25.10	27.90	29.80	27.20
* 26		12.50	13.60	16.40	18.30	15.70	* 50		24.50	25.60	28.40	30.30	27.70
27		13.00	14.10	16.90	18.80	16.20							

註：” * ” 表示已開模規格

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPV-WHB-xx-LF
SERIES  LEADFREE
04~50WAY
BOTTOM CONTACT
HINGED ZIF
90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: FFC/FPC 0.5 PITCH CONNECTOR , ZIF SMT TYPE , BODY HIGH 2.0 mm.