

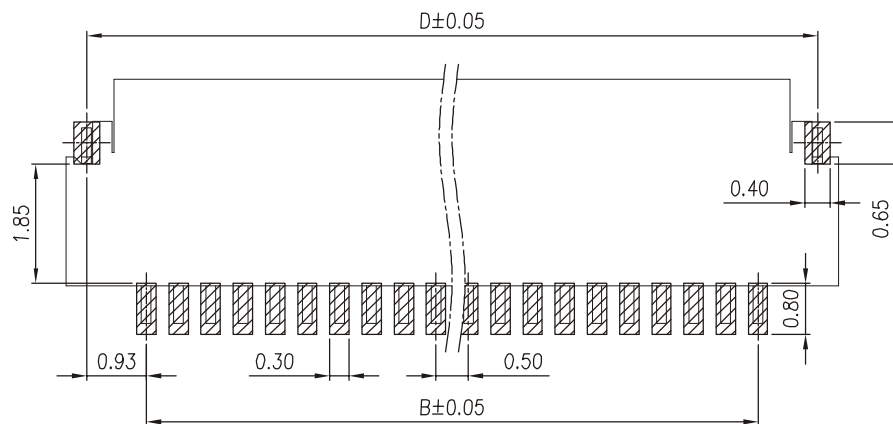
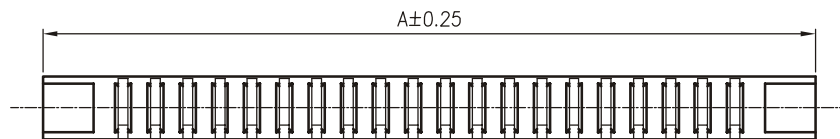
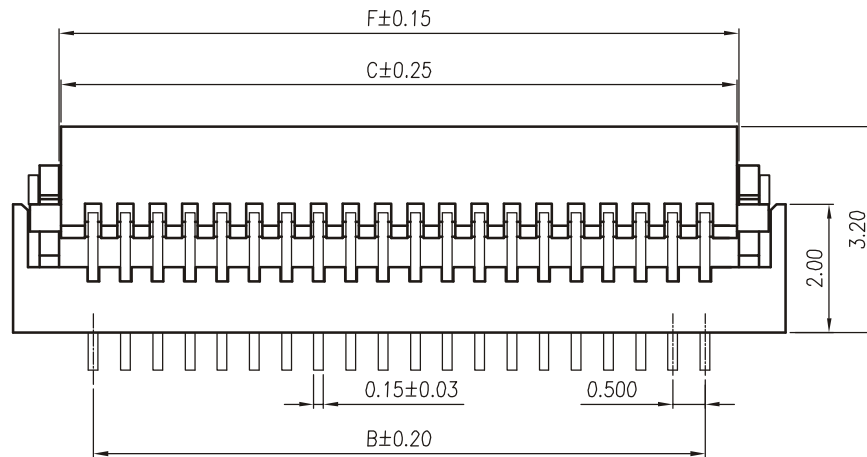
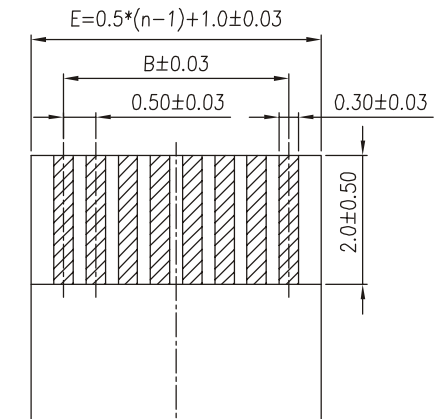





RECOMMENDED PCB LAYOUT
Tolerance: ± 0.05

■ MATERIALS:

HOUSING: HIGH-TEMP, UL94V-0, COLOR: NATURAL.
COVER: HIGH-TEMP, UL94V-0, COLOR: SEE TABLE
CONTACT: COPPER ALLOY.
HOLDDOWN: COPPER ALLOY.

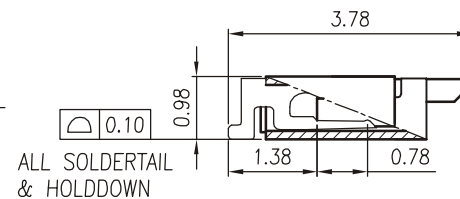

**Applicable FPC/FFC
recommended dimension**

TABLE	
DIM G	COLOR
0.20	NATURAL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPV-WHB09F2G-xx-LF
SERIES
90°SMT
HINGED ZIF
LEADFREE
04~50WAY
GOLD
0.2mm FPC CABLE
HIGH 0.98mm
BOTTOM CONTACT

DESCRIPTION: FFC/FPC 0.5 PITCH CONNECTOR, ZIF SMT TYPE , BODY HIGH 0.9mm.