



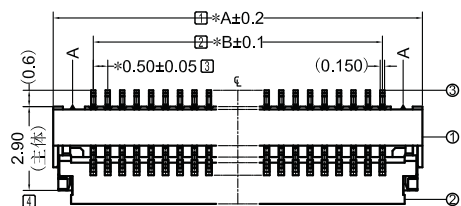
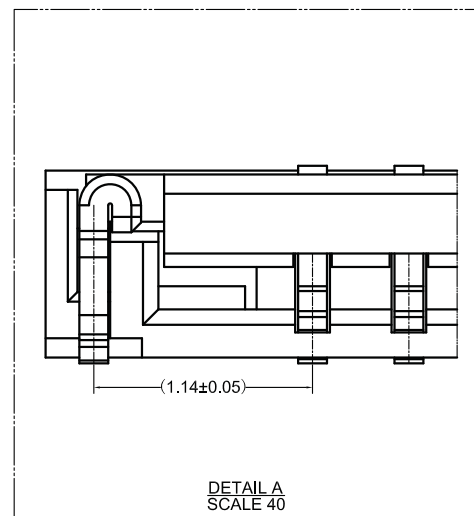


Pin	重点替代尺寸				Pin	重点替代尺寸			
	A	B	C	D		A	B	C	D
04	4.27	1.50	3.10	3.00	35	19.77	17.00	18.60	18.50
05	4.77	2.00	3.60	3.50	36	20.27	17.50	19.10	19.00
06	5.27	2.50	4.10	4.00	37	20.77	18.00	19.60	19.50
07	5.77	3.00	4.60	4.50	38	21.27	18.50	20.10	20.00
08	6.27	3.50	5.10	5.00	39	21.77	19.00	20.60	20.50
09	6.77	4.00	5.60	5.50	40	22.27	19.50	21.10	21.00
10	7.27	4.50	6.10	6.00	41	22.77	20.00	21.60	21.50
11	7.77	5.00	6.60	6.50	42	23.27	20.50	22.10	22.00
12	8.27	5.50	7.10	7.00	43	23.77	21.00	22.60	22.50
13	8.77	6.00	7.60	7.50	44	24.27	21.50	23.10	23.00
14	9.27	6.50	8.10	8.00	45	24.77	22.00	23.60	23.50
15	9.77	7.00	8.60	8.50	46	25.27	22.50	24.10	24.00
16	10.27	7.50	9.10	9.00	47	25.77	23.00	24.60	24.50
17	10.77	8.00	9.60	9.50	48	26.27	23.50	25.10	25.00
18	11.27	8.50	10.00	10.00	49	26.77	24.00	25.60	25.50
19	11.77	9.00	10.50	10.50	50	27.27	24.50	26.10	26.00
20	12.27	9.50	11.00	11.00	51	27.77	25.00	26.60	26.50
21	12.77	10.00	11.60	11.50	52	28.27	25.50	27.10	27.00
22	13.27	10.50	12.10	12.00	53	28.77	26.00	27.60	27.50
23	13.77	11.00	12.60	12.50	54	29.27	26.50	28.10	28.00
24	14.27	11.50	13.10	13.00	55	29.77	27.00	28.60	28.50
25	14.77	12.00	13.60	13.50	56	30.27	27.50	29.10	29.00
26	15.27	12.50	14.10	14.00	57	30.77	28.00	29.60	29.50
27	15.77	13.00	14.60	14.50	58	31.27	28.50	30.10	30.00
28	16.27	13.50	15.10	15.00	59	31.77	29.00	30.60	30.50
29	16.77	14.00	15.60	15.50	60	32.27	29.50	31.10	31.00
30	17.27	14.50	16.10	16.00	61	32.77	30.00	31.60	31.50
31	17.77	15.00	16.60	16.50	N	4.27+	1.50+	3.10+	3.00+
32	18.27	15.50	17.10	17.00		(N-4)	(N-4)	(N-4)	(N-4)
33	18.77	16.00	17.60	17.50		X0.5	X0.5	X0.5	X0.5
34	19.27	16.50	18.10	18.00					

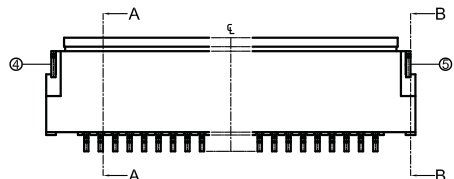

截面 A-A

截面 B-B



DETAIL A
SCALE 40

规格

1.材料:

1.1.主体:LCP UL94V-0.

1.2.盖子:LCP UL94V-0.

1.3.端子:磷青铜.

1.4.焊片:磷青铜.


2.性能:

2.1.额定电流:0.5A.


2.2.额定电压:50V.

2.3.工作温度:-55°C ~ +105°C.

3.注*为重点尺寸、□为FAI检验尺寸。

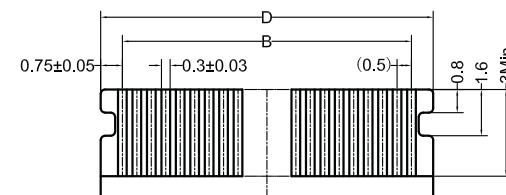

建议排线尺寸 / 厚度0.30±0.03

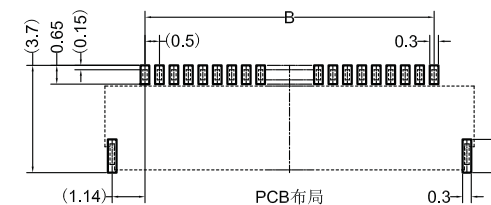

PCB布局

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.10

DATE

.XXX ± 0.05

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

FPV-WHB10FJ-xx-LF

SERIES

LEADFREE

04~61WAY

INNER KEY

HIGH 1.0mm

BOTTOM CONTACT

HINGED ZIF

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com