

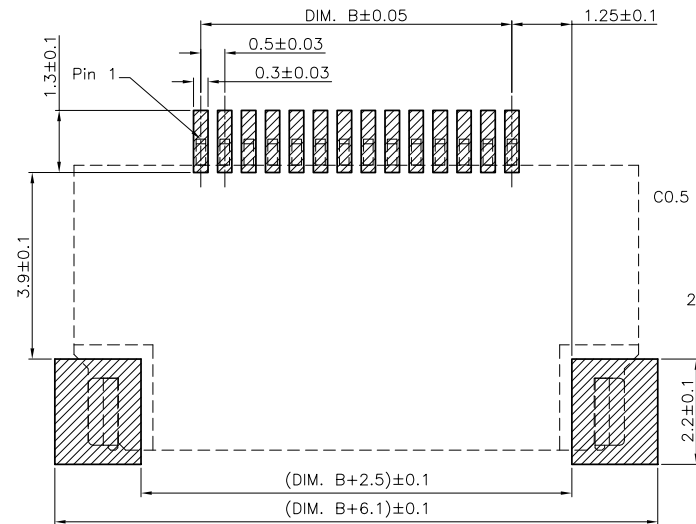
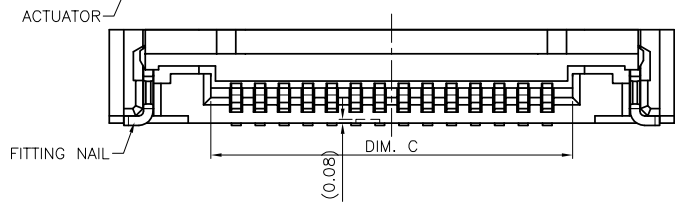
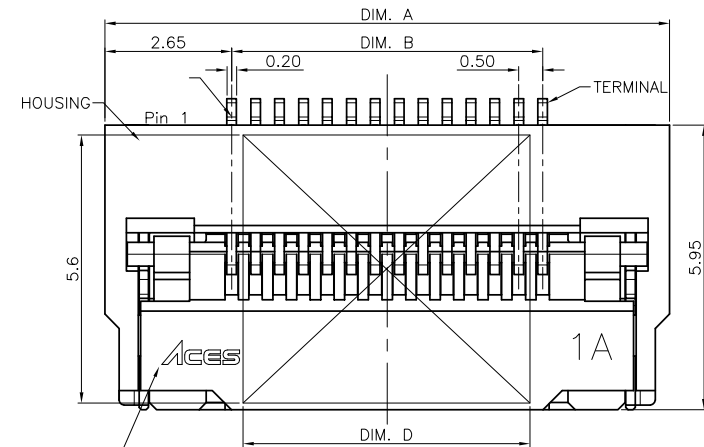
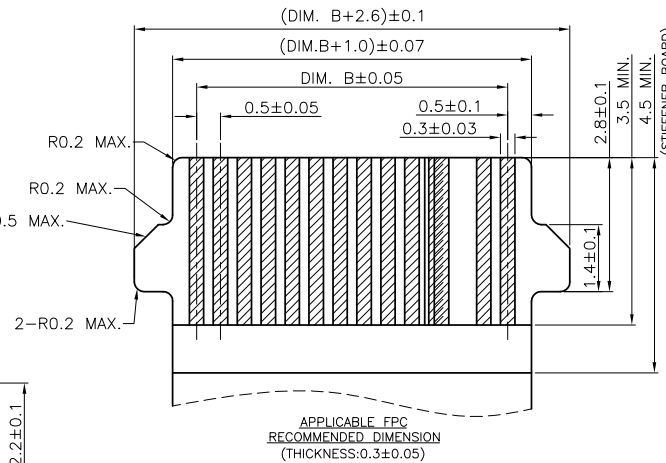


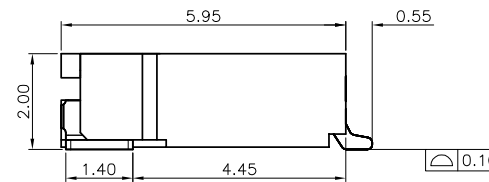

RECOMMENDED PCB LAYOUT

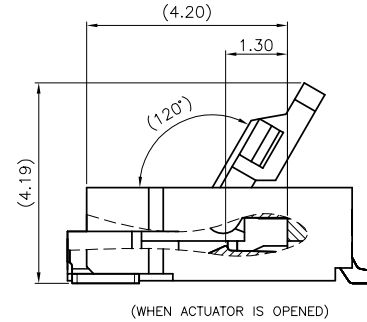

- NOTES:
1. MATERIAL:
 - 1.1 HOUSING: HALOGEN FREE THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:NATURAL.
 - 1.2 CONTACT: COPPER ALLOY
 - 1.3 FITTING NAIL: COPPER ALLOY
 - 1.4 ACTUATOR: HALOGEN FREE THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
 2. FINISH:
 - 2.1 CONTACT:
 - 50u" MIN. NICKEL UNDERPLATING OVERALL.
 - 1: GOLD FLASH PLATING OVERALL.
 - N: 100u" MIN. TIN PLATING OVERALL.
 - T: 10u" MIN. GOLD PLATING ON CONTACT AREA.
 - GOLD FLASH PLATING ON SOLDERING AREA.
 - 2.2 FITTING NAIL:
 - 50u" MIN. NICKEL UNDERPLATING OVERALL.
 - 100u" MIN. TIN PLATING OVERALL.
 3. REFLOW SOLDER CAPABLE TO 260°C

CKT	DIM A	DIM B	DIM C	DIM D	CKT	DIM A	DIM B	DIM C	DIM D
4	6.80	1.50	2.56	3.0	33	21.30	16.00	17.06	15.0
5	7.30	2.00	3.06		34	21.80	16.50	17.56	
6	7.80	2.50	3.56		35	22.30	17.00	18.06	
7	8.30	3.00	4.06		36	22.80	17.50	18.56	
8	8.80	3.50	4.56		37	23.30	18.00	19.06	
9	9.30	4.00	5.06		38	23.80	18.50	19.56	
10	9.80	4.50	5.56		39	24.30	19.00	20.06	
11	10.30	5.00	6.06		40	24.80	19.50	20.56	
12	10.80	5.50	6.56		41	25.30	20.00	21.06	
13	11.30	6.00	7.06		42	25.80	20.50	21.56	
14	11.80	6.50	7.56	6.0	43	26.30	21.00	22.06	
15	12.30	7.00	8.06		44	26.80	21.50	22.56	
16	12.80	7.50	8.56		45	27.30	22.00	23.06	
17	13.30	8.00	9.06		46	27.80	22.50	23.56	
18	13.80	8.50	9.56		47	28.30	23.00	24.06	
19	14.30	9.00	10.06		48	28.80	23.50	24.56	
20	14.80	9.50	10.56		49	29.30	24.00	25.06	
21	15.30	10.00	11.06		50	29.80	24.50	25.56	
22	15.80	10.50	11.56		51	30.30	25.00	26.06	
23	16.30	11.00	12.06	15.0	52	30.80	25.50	26.56	
24	16.80	11.50	12.56		53	31.30	26.00	27.06	
25	17.30	12.00	13.06		54	31.80	26.50	27.56	
26	17.80	12.50	13.56		55	32.30	27.00	28.06	
27	18.30	13.00	14.06		56	32.80	27.50	28.56	
28	18.80	13.50	14.56		57	33.30	28.00	29.06	
29	19.30	14.00	15.06		58	33.80	28.50	29.56	
30	19.80	14.50	15.56		59	34.30	29.00	30.06	
31	20.30	15.00	16.06		60	34.80	29.50	30.56	
32	20.80	15.50	16.56						

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

FPV-WHB20FKC-xx-LF

SERIES

90°SMT

HINGED ZIF

MYLAR

FPC LOCK

HIGH 2.0mm

BOTTOM CONTACT

DESCRIPTION: 0.5mm PITCH EASY ON FPC/FFC CONN.