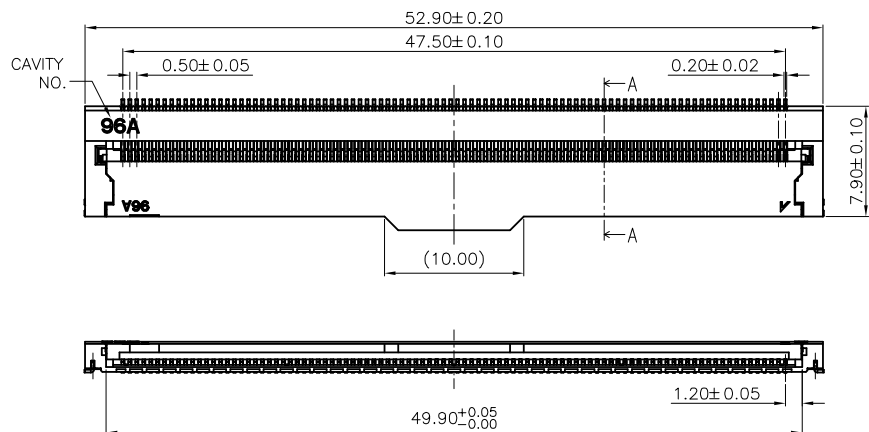


NOTES:

1. MATERIAL:

- 1.1 HOUSING: THERMOPLASTIC HIGH TEMP., UL94 V-0
COLOR: WHITE
- 1.2 SLIDER: THERMOPLASTIC HIGH TEMP., UL94 V-0
COLOR: BLACK
- 1.2 CONTACT: COPPER ALLOY
- 1.3 ANCHOR PLATE: BRASS ALLOY

2. PLATING:

- 2.1 CONTACT:
50~100μ" NICKEL PLATING OVERALL
GOLD FLASH PLATING ON CONTACT AND SOLDER


2.2 ANCHOR PLATE:

- 50~100μ" NICKEL PLATING OVERALL
100μ" MIN. TIN PLATING ON OVERALL


3. REFLOW SOLDER CAPABLE TO 260°C

4. RoHS COMPLIANT PRODUCTS


5. COPLANARITY IS 0.1mm MAX.

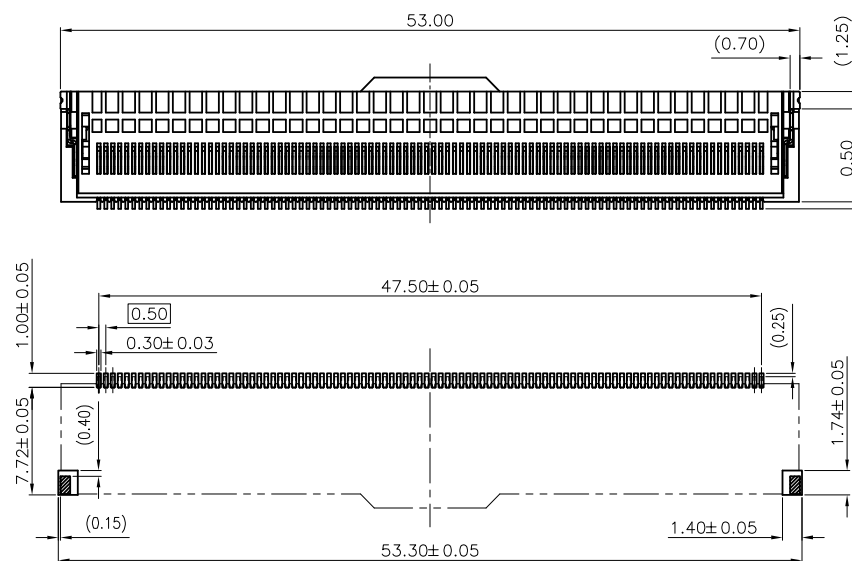

RECOMMENDED PCB PATTERN

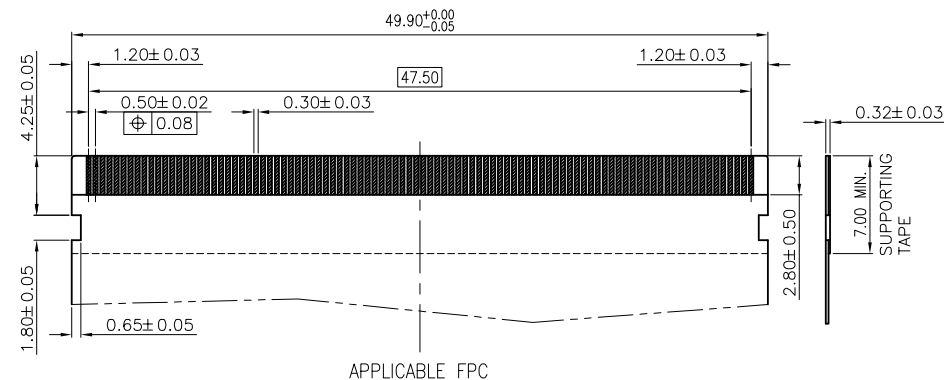

APPLICABLE FPC

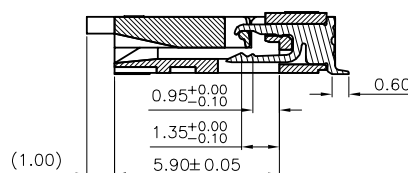

SECTION A-A
(SCALE 4:1)

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

.XXX ± 0.10

ANG ± 2°

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

FPV-WHB2260FJ-96-LF

SERIES

90°SMT

HINGED ZIF

96 WAY

INNER KEY

PIN TO PAD 5.98mm

HIGH 2.2mm

BOTTOM CONTACT

LEADFREE

96 WAY

INNER KEY

PIN TO PAD 5.98mm

HIGH 2.2mm

BOTTOM CONTACT

DESCRIPTION: 0.5 mm PITCH EASY-ON CONN. SMT R/A B/C TYPE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com