
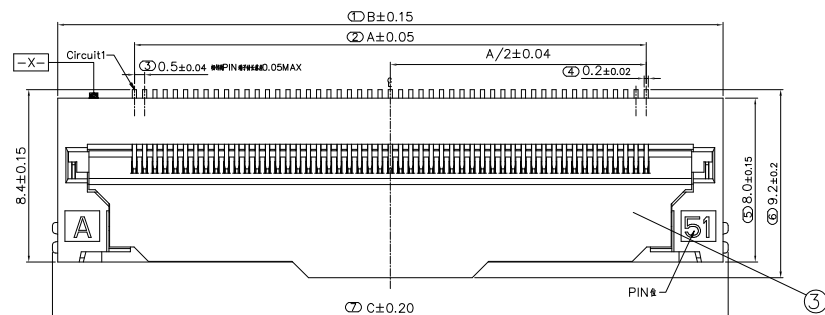
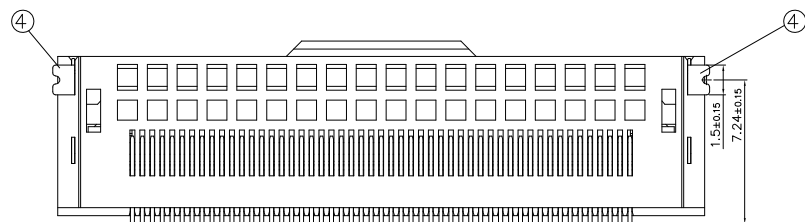




SPEC :

1. Housing: High-Temp Plastic, UL94-V
Color: Nature (Ivory) (LCP)
2. Locker: High-Temp Plastic, UL94-V
Color: Black (LCP)
3. Contact: Phosphor Bronze (C5191)
4. Solder Tab: BRASS (C2680)
5. Operating Voltage (Max): 50V AC
6. Current Rating (Max): 0.5A DC
7. Operating Temperature Range : -40°C ~ +105°C

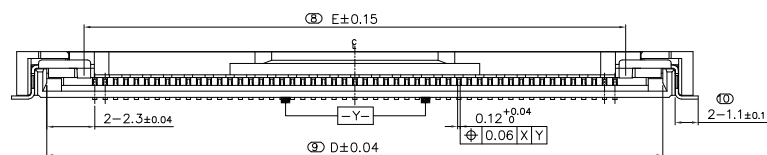

4	螺絲 Fitting Nail	材料 Phosphor Bronze	2	电镀(鍍): 整个表面鍍底鍍30u"MIN, 再鍍鍍 80u"MIN.
3	螺絲 Actuator	LCP(UL94V-0)	1	鍍鍍
2	螺絲 Contact	材料 Phosphor Bronze	n*1	电镀(鍍): 整个表面鍍底鍍30u"MIN, 再鍍鍍点及列脚点鍍80u"MIN.
1	螺絲 Housing	LCP(UL94V-0)	1	鍍
序号	名称	材料	数量	附注

PIN	A	B	C	D	E
45	22.00	29.50	30.00	26.60	23.00
51	25.00	32.50	33.00	29.60	26.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION


照片框

ORDER INFORMATION

FPV-WHB22FJ-xx-LF


SERIES
90°SMT
LEADFREE
45.51 WAY
INNER KEY
HIGH 2.2mm
BOTTOM CONTACT
HINGED ZIF

DESCRIPTION: 0.5PH 2.2H 掀蓋臥貼前插內凹扣鍍金

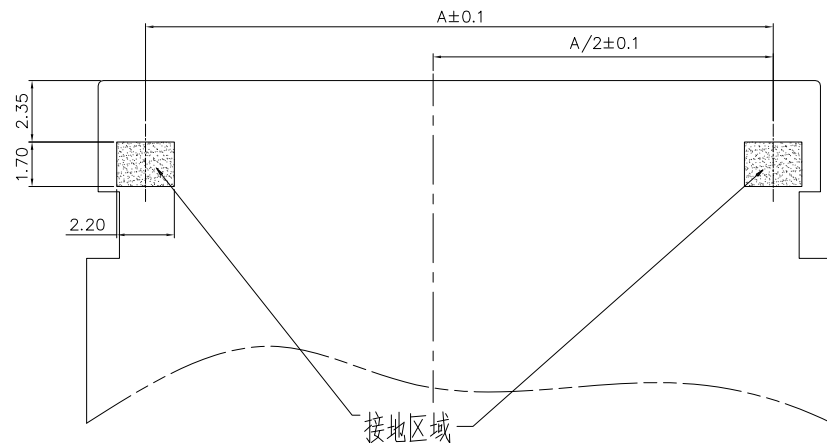


0.30±0.03
(FPC thickness)

6.0 MIN.

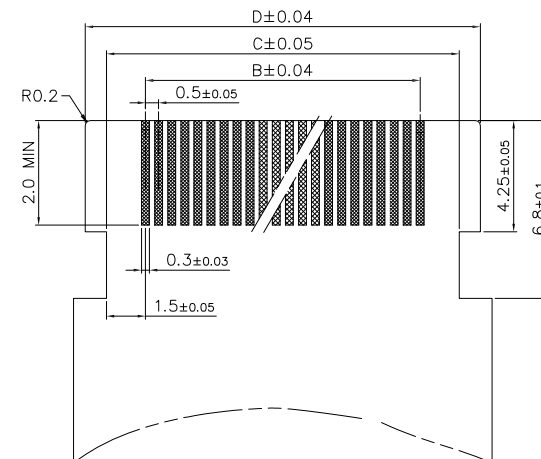

适用FPC寸法
RECOMMENDED FPC DIMENSIONS

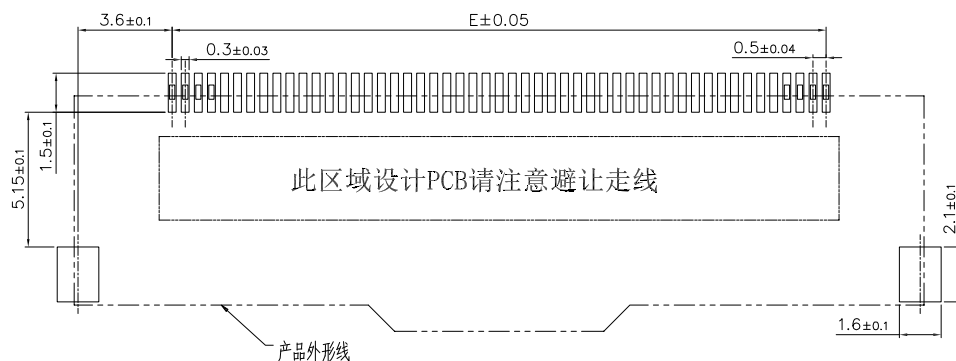

适用线路板
RECOMMENDED PCB LAYOUT

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

SIZE A4

PPOJECTION

ORDER INFORMATION

FPV-WHB22FJ-xx-LF

SERIES

90°SMT

LEADFREE

45.51 WAY

INNER KEY

HIGH 2.2mm

BOTTOM CONTACT

HINGED ZIF

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 0.5PH 2.2H 掀蓋臥貼前插內凹扣鍍金