

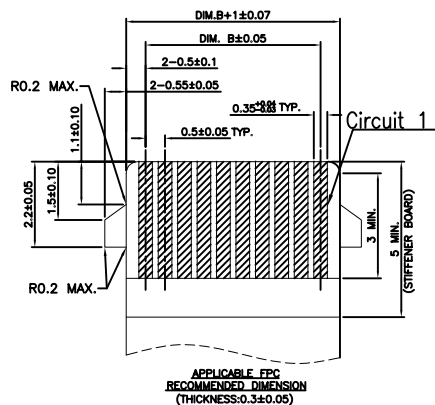
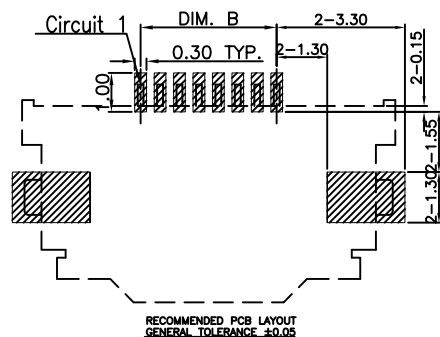
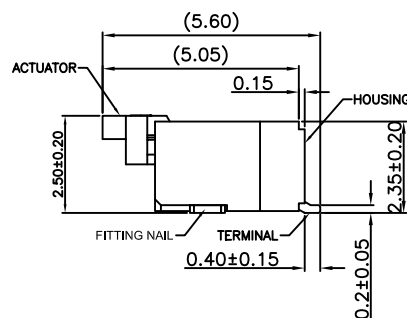
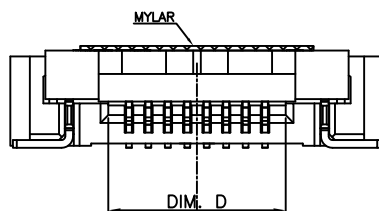




NOTES:

1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,UL94V-0;
 - 1.2 ACTUATOR: THERMOPLASTIC, HIGH TEMP.,UL94V-0;
 - 1.3 CONTACT: COPPER ALLOY;
 - 1.4 FITTING NAIL:COPPER ALLOY.
2. FINISH:
 - 2.1 CONTACT:
 - 50u" MIN. NICKEL PLATING OVERALL;
 - N:100u" MIN. MATTE TIN PLATING OVERALL;
 - 1:GOLD FLASH PLATING OVERALL;
 - T:GOLD FLASH PLATING OVERALL,10u"GOLD PLATING ON CONTACT AREA.
 - 2.2 FITTING NAIL:
 - 50u" MIN. NICKEL PLATING OVERALL;
 - N:100u" MIN. MATTE TIN PLATING OVERALL;
 - 1:GOLD FLASH PLATING OVERALL;
 - T:100u" MIN. MATTE TIN PLATING OVERALL.
3. REFLOW SOLDER CAPABLE TO 260°C

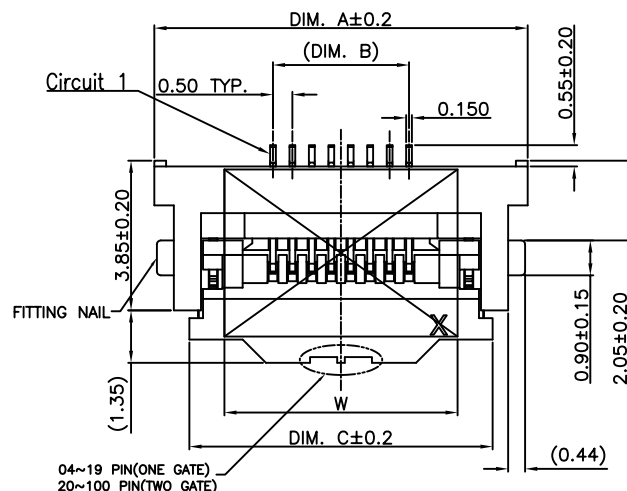

CKT	DIM A	DIM B	DIM C	DIM D	MYLAR W
005	8.10	2.00	6.30	3.08	6.00
006	8.60	2.50	6.80	3.58	6.00
008	9.60	3.50	7.80	4.58	6.00
010	10.60	4.50	8.80	5.58	6.00
012	11.60	5.50	9.80	6.58	6.00
013	12.10	6.00	10.30	7.08	6.00
015	13.10	7.00	11.30	8.08	6.00
020	15.60	9.50	13.80	10.58	12.00
040	25.60	19.50	23.80	20.58	16.00
050	30.60	24.50	28.80	25.58	16.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
X. ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ± 2°



照片框

ORDER INFORMATION

FPV-WHB25FKCR-xx-LF

SERIES T T T T T 05~80WAY LEADFREE
90°SMT REEL
HINGED ZIF MYLAR
FPC LOCK
HIGH 2.5mm
BOTTOM CONTACT

DESCRIPTION: 0.5mm PITCH EASY ON FPC/FFC CO

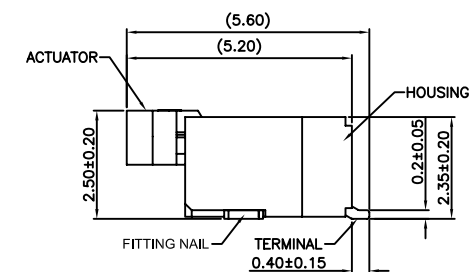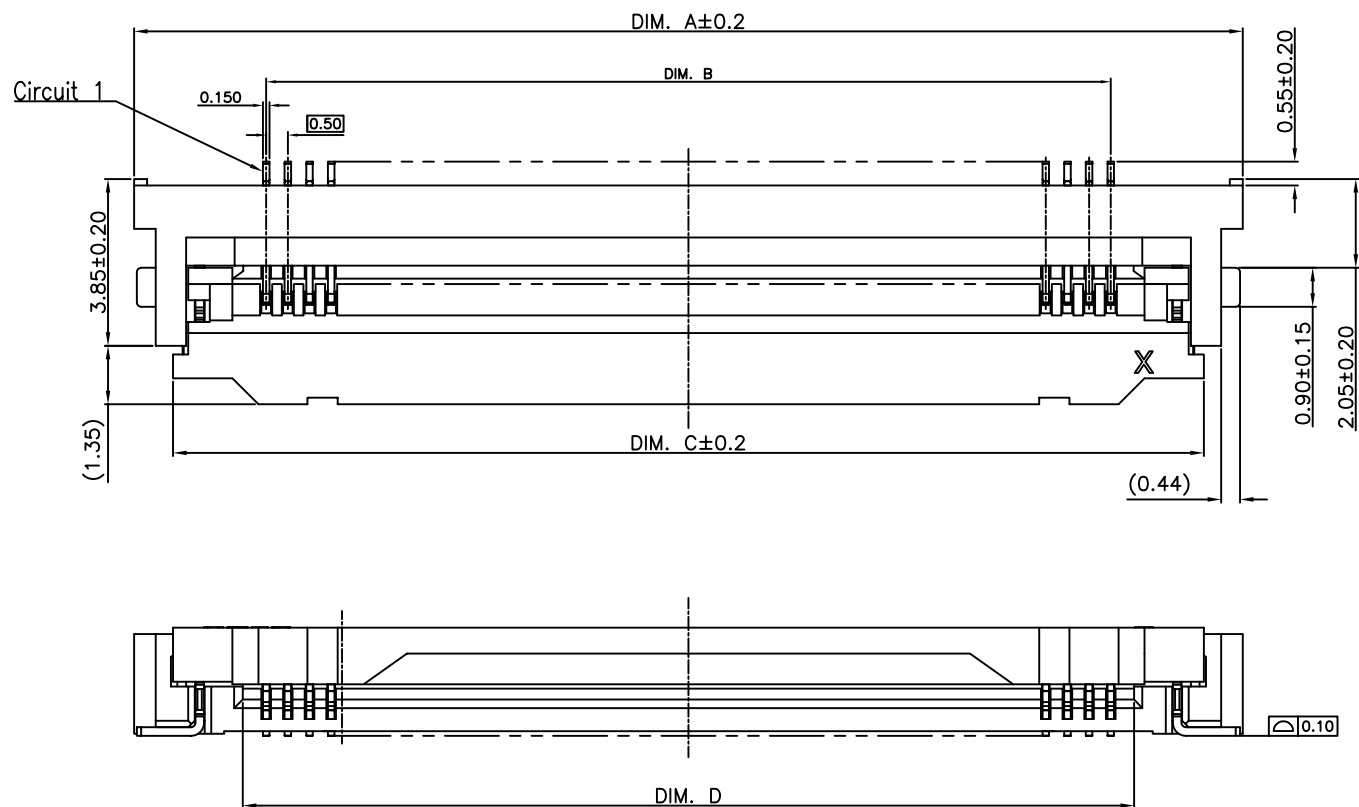

CKT	DIM A	DIM B	DIM C	DIM D	MYLAR W
060	35.60	29.50	33.80	30.58	16.00
064	37.60	31.50	35.80	32.58	16.00
068	39.60	33.50	37.80	34.58	16.00
080	45.60	39.50	43.80	40.58	20.00

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ± 2°

PPOJECTION


照片框

ORDER INFORMATION

FPV-WHB25FKCR-xx-LF



SERIES 05~80WAY LEADFREE
90°SMT REEL
HINGED ZIF MYLAR
FPC LOCK
HIGH 2.5mm
BOTTOM CONTACT

DESCRIPTION: 0.5mm PITCH EASY ON FPC/FFC CO

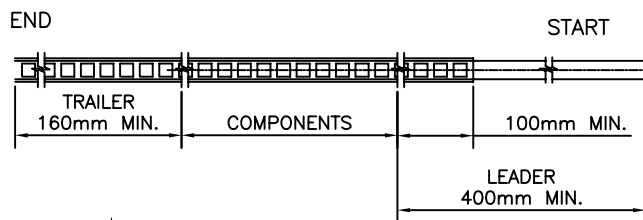

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE: $\pm 0.20\text{mm}$
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm .
3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
5. THICKNESS: $0.35 \pm 0.05 \text{ mm}$.
6. PACKING LENGTH PER 13" REEL : 22.6 METERS.
7. COMPONENT LOAD PER 13" REEL : 1800 PCS.

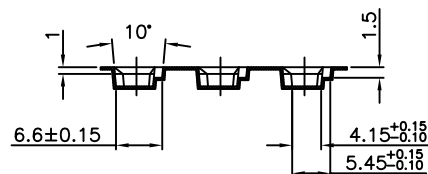

TOLERANCES ARE

 $X. \pm 0.50$ $\bar{X} \pm 0.25$
$$.XXX \pm 0.10$$

ANG $\pm 2^\circ$

PJECTION 

照片框

FPV-WHB25FKCR-xx-LF


```

graph TD
    SERIES --> 90°SMT
    SERIES --> HINGED_ZIF[HINGED ZIF]
    SERIES --> REEL
    SERIES --> MYLAR
    SERIES --> FPC_LOCK[FPC LOCK]
    SERIES --> HIGH_25mm[HIGH 2.5mm]
    SERIES --> BOTTOM_CONTACT[BOTTOM CONTACT]
    SERIES --> 05_80WAY[05~80WAY]
    SERIES --> LEADFREE
  
```

DESCRIPTION: 0.5mm PITCH EASY ON FPC/FFC CO

煜倫股份有限公司

www.morethanall.com

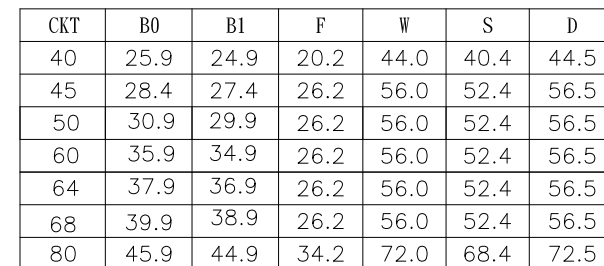

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE, ±0.20mm
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
5. THICKNESS: 0.40 ± 0.05 mm.
6. PACKING LENGTH PER 13" REEL : 22.6 METERS.
7. COMPONENT LOAD PER 13" REEL : 1800 PCS.

DESCRIPTION: 0.5mm PITCH EASY ON FPC/FFC CO