


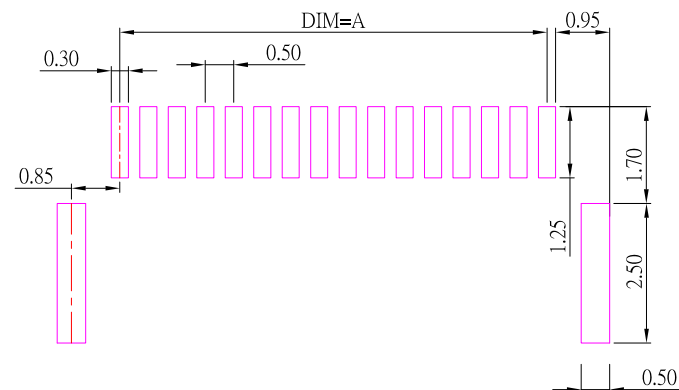
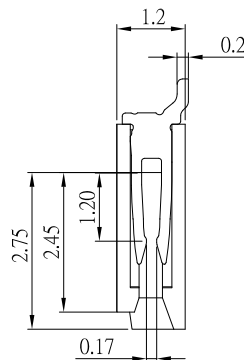


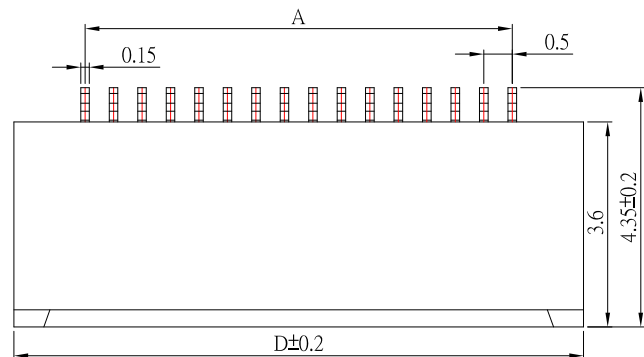


RECOMMENDED PCB LAYOUT

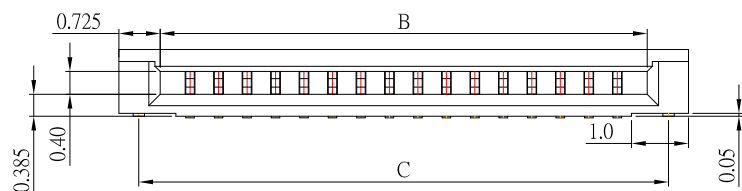

PIN數	Dimension			
	A	B	C	D
4	1.50	2.55	3.30	4.10
5	2.00	3.05	3.80	4.60
6	2.50	3.55	4.30	5.10
8	3.50	4.55	5.30	6.10
9	4.00	5.05	5.80	6.60
10	4.50	5.55	6.30	7.10
12	5.50	6.55	7.30	8.10
14	6.50	7.55	8.30	9.10
20	9.50	10.55	11.30	12.10
24	11.50	12.55	13.30	14.10

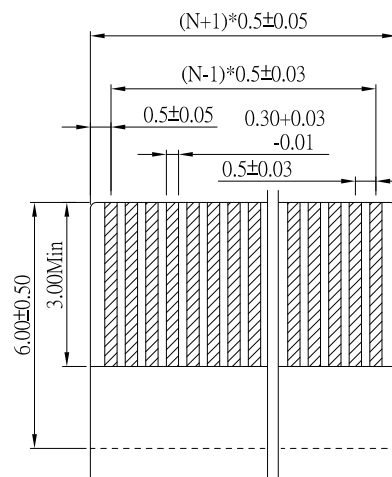

APPLI CABLE FPC

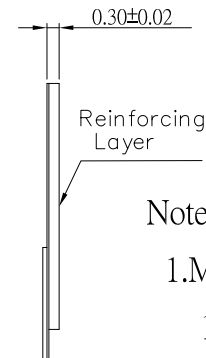

Note:

1. Material

1.1 Housing: LCP

1.2 Contact: Phosphor Bronze, Gold Plated

1.3 Fitting Nail: Brass, Tin Plated

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

照片框

ORDER INFORMATION

FPV-WL2E121R-xx-LF





SERIES LEADFREE
04~20 WAY

90°SMT REEL
NON ZIF 1.1mm

DUAL CONTACT HIGH 1.2mm
EAR

DESCRIPTION: 0.5mm FPC 雙接 H:1.2mm

PIN NO.	A	B
4	16	16.5
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16	24	24.5
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
28		
29		
30		

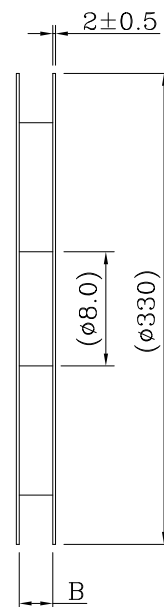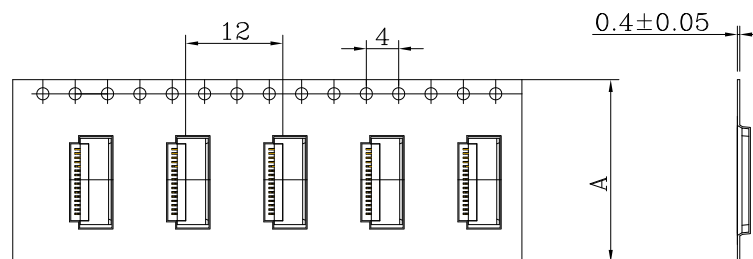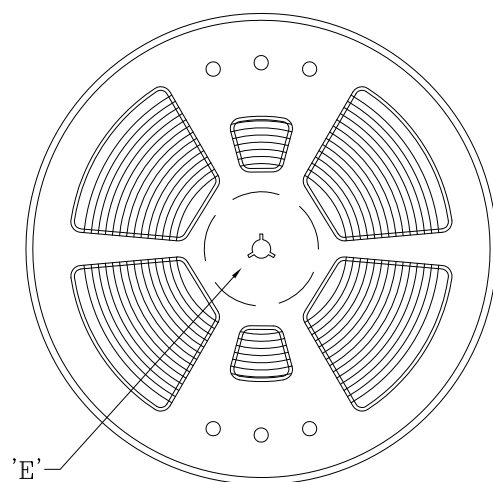

NOTES:

1.Number of Connectors:



3000 Rcs/Reel

2.Material

Carrier Tape: PET,PE,PEF

Reel: PS

3.Lead Tape Length:

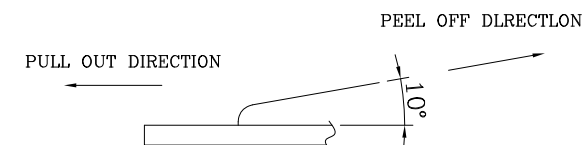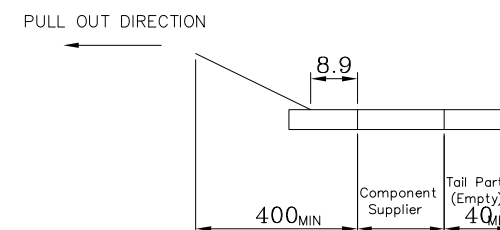

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

PPOJECTION

照片框

ORDER INFORMATION

FPV-WL2E121R-xx-LF

SERIES LEADFREE
04~20 WAY

90°SMT REEL
NON ZIF 1.1mm

DUAL CONTACT HIGH 1.2mm
EAR

DESCRIPTION: 0.5mm FPC 雙接 H:1.2mm