
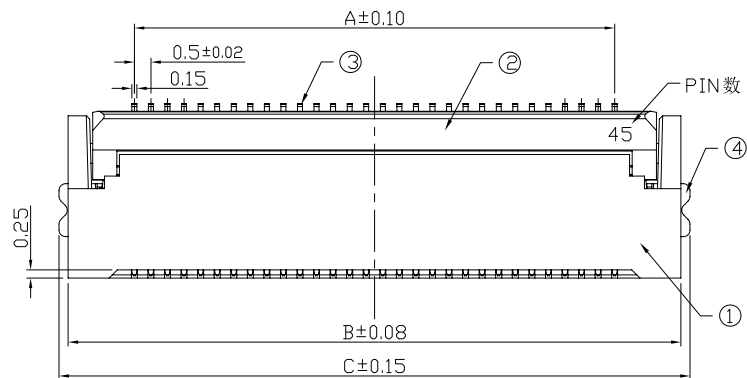
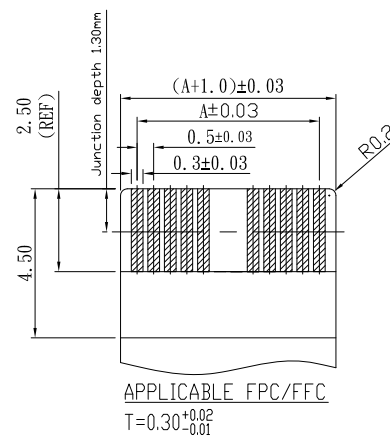
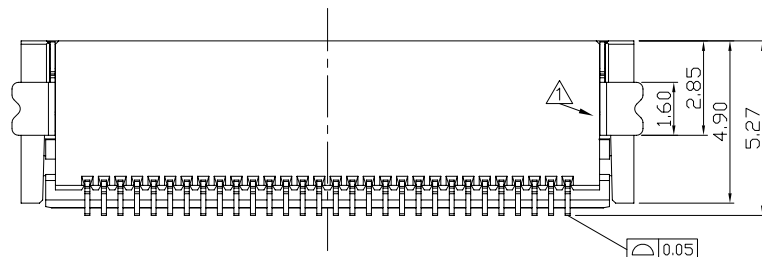



RECOMMENDED PCB LAYOUT

SPEC :

1. Housing: High-Temp Plastic, UL94-V
Color: Nature (Lvory) (LCP)
2. Locker: High-Temp Plastic, UL94-V
Color: Black (LCP)
3. Contact: Phosphor Bronze (C5191)
4. Solder Tab: BRASS (C2680)

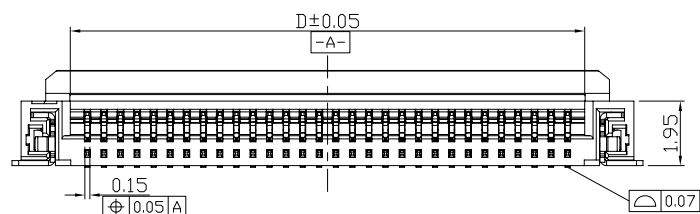

APPLICABLE FPC/FFC

T=0.30^{+0.02}_{-0.01}

NO. DIM POSITIONS	A	B	C	D
6	2.50	6.50	7.05	3.55
8	3.50	7.50	8.05	4.55
9	4.00	8.00	8.55	5.05
10	4.50	8.50	9.05	5.55
12	5.50	9.50	10.05	6.55
13	6.00	10.00	10.55	7.05
14	6.50	10.50	11.05	7.55
15	7.00	11.00	11.55	8.05
16	7.50	11.50	12.05	8.55
18	8.50	12.50	13.05	9.55
20	9.50	13.50	14.05	10.55
24	11.50	15.50	16.05	12.55
25	12.00	16.00	16.55	13.05
28	13.50	17.50	18.05	14.55
30	14.50	18.50	19.05	15.55
31	15.00	19.00	19.55	16.05
32	15.50	19.50	20.05	16.55
34	16.50	20.50	21.05	17.55
36	17.50	21.50	22.05	18.55
40	19.50	23.50	24.05	20.55
45	22.00	26.00	26.55	23.05
50	24.50	28.50	29.05	25.55
54	26.50	30.50	31.05	27.55
60	29.50	33.50	34.05	30.55
80	39.50	43.50	44.05	40.55

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPV-WRD20-xx-LF
SERIES
LEADFREE
06~80WAY
HIGH 2.0mm
DUAL CONTACTS
ROTARY ZIF
90°SMT

DESCRIPTION: 0.5PH 2.0H 掀蓋臥貼背插