
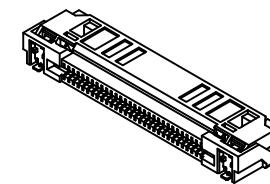

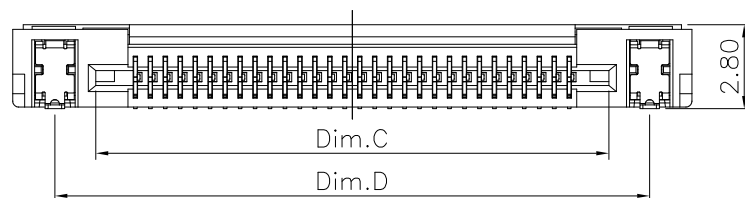




Specifications:
 Current Rating: 0.5A AC,DC
 Voltage Rating: 50V AC,DC
 Contact Resisitance: 100m ohm.Max
 Insulation Resisitance: 500M ohm.Min
 Withstanding Voltage: 150V AC/Minute
 Operating Temperature Range:-55°C ~ +105°C

Material:
 Insulator: LCP(UL94V-0)
 Insulator Color: Black
 Terminal: Phosphor Bronze
 Plated: Selective Gold
 Solder Pad: Phosphor Bronze
 Plated: Matte Tin

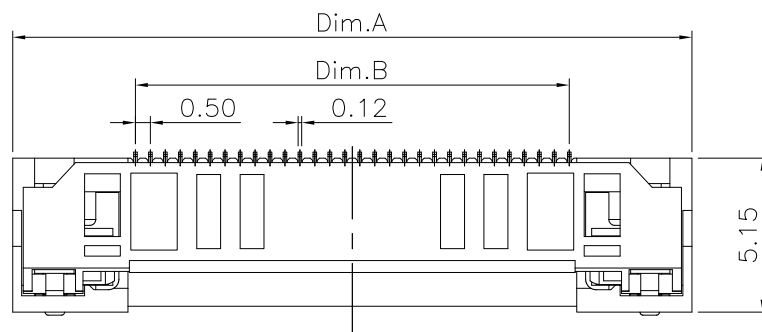

Dimension Information:

Pos	Dim.A	Dim.B	Dim.C	Dim.D
8	11.70	3.50	6.15	8.90
10	12.70	4.50	7.15	9.90
12	13.70	5.50	8.15	10.90
16	15.70	7.50	10.15	12.90
20	17.70	9.50	12.15	14.90
30	22.70	14.50	17.15	19.90



MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.20
 .XX ± 0.10
 .XXX ±
 ANG ±


PPOJECTION

照片框


ORDER INFORMATION

FPV-WRD28FJR-xx-LF
 SERIES
 LEADFREE
 08~30 WAY
 REEL
 INNER KEY
 HIGH 2.8mm
 DUAL CONTACTS
 90°SMT
 ROTARY ZIF


DESCRIPTION:0.5mm FPC Double Contact Type

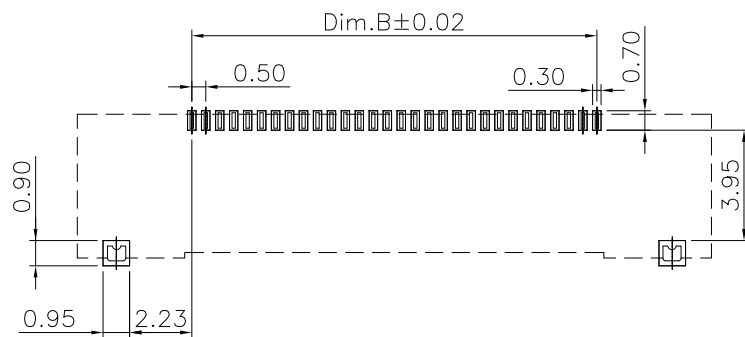

P.C.B LAYOUT

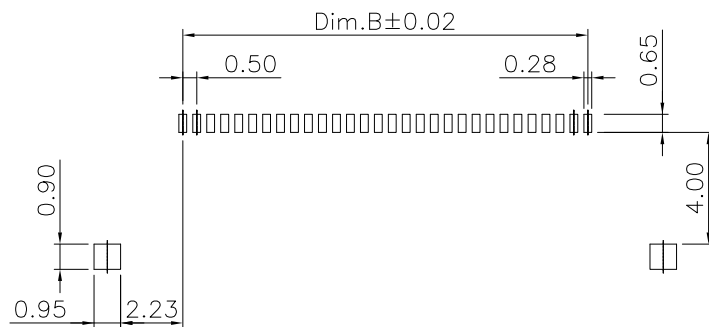

RECOMMENDED METAL MASK PATTERN

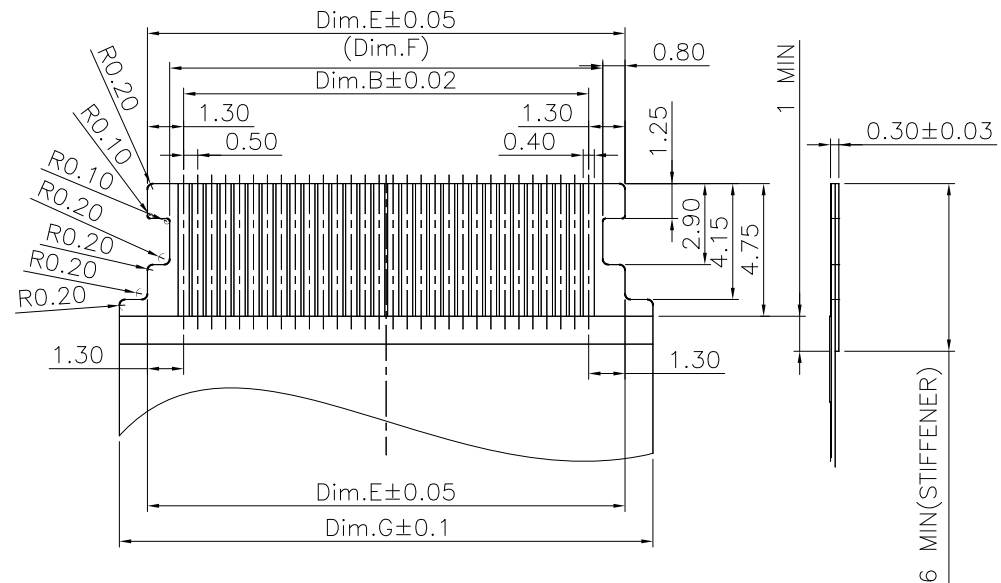

Dimension Information:

Pos	Dim.B	Dim.E	Dim.F	Dim.G
8	3.50	6.10	4.50	7.50
10	4.50	7.10	5.50	8.50
12	5.50	8.10	6.50	9.50
16	7.50	10.10	8.50	11.50
20	9.50	12.10	10.50	13.50
30	14.50	17.10	15.50	18.50



照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±




ORDER INFORMATION

FPV-WRD28FJR-xx-LF
SERIES
LEADFREE
08~30 WAY
REEL
INNER KEY
HIGH 2.8mm
DUAL CONTACTS
ROTARY ZIF
90°SMT


DESCRIPTION: 0.5mm FPC Double Contact Type

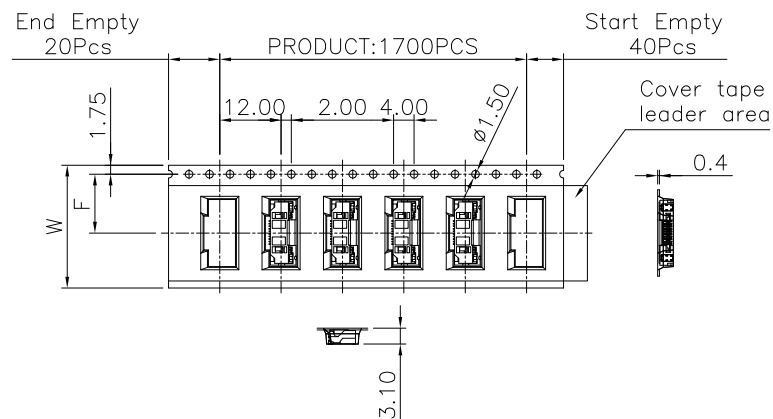

For Reel width (dimension W)24mm ,Single row hole

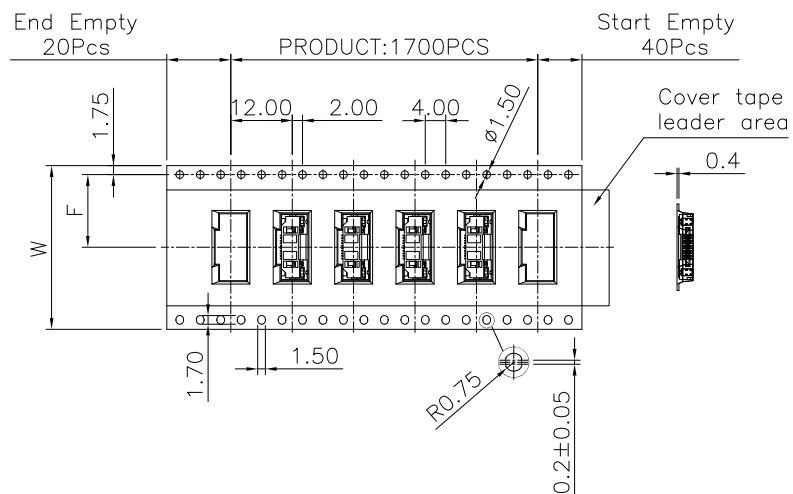


For Reel width (dimension W)32,44mm ,Double rows hole

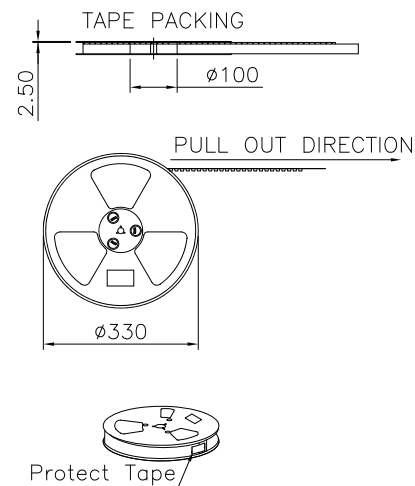

NOTE:

- 1.All dimensions meet EIA-481-D requirements.
- 2.Material: Transparent Conductive Polystyrene Alloy 100% recyclable.
- 3.Thickness: $0.4 \pm 0.05\text{mm}$
- 4.Component load per 13" reel:1700Pcs.
- 5.Carton Size:350*350*296(mm)

Pin.No	W	F	Pcs/R	R/CTN	Q'TY
8	24	11.5	1700	9	15300
10	24	11.5	1700	9	15300
12	24	11.5	1700	9	15300
16	24	11.5	1700	9	15300
20	32	14.2	1700	7	11900
30	44	20.2	1700	5	8500

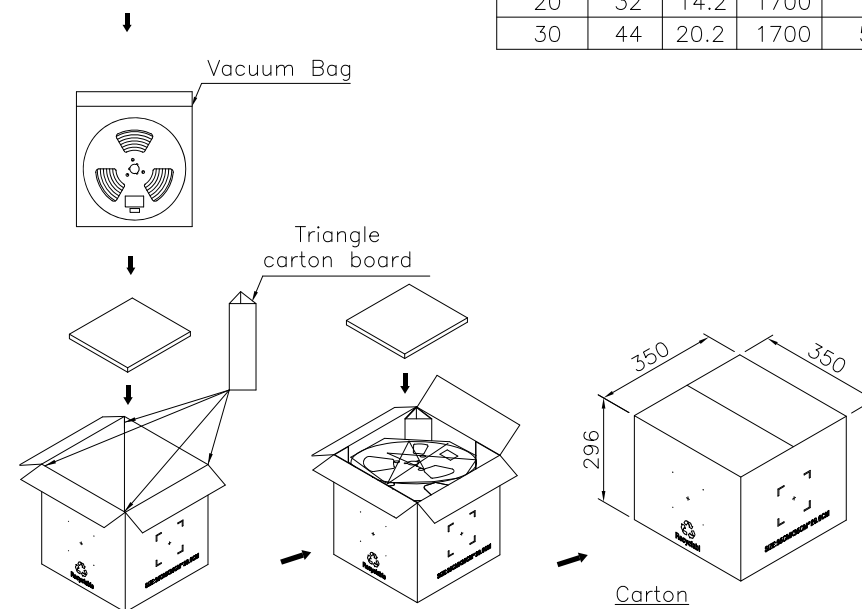

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPV-WRD28FJR-xx-LF
SERIES
LEADFREE
08-30 WAY
REEL
INNER KEY
HIGH 2.8mm
DUAL CONTACTS
ROTARY ZIF
90°SMT

DESCRIPTION:0.5mm FPC Double Contact Type