

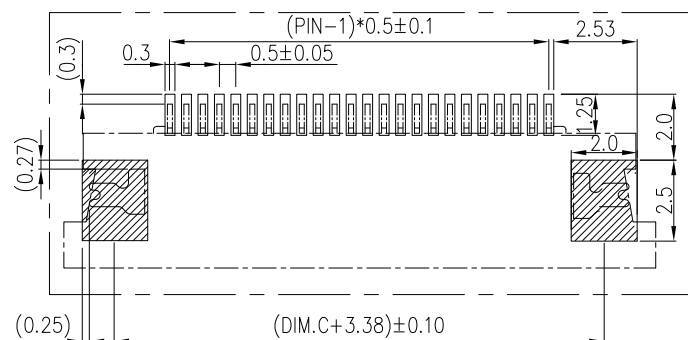





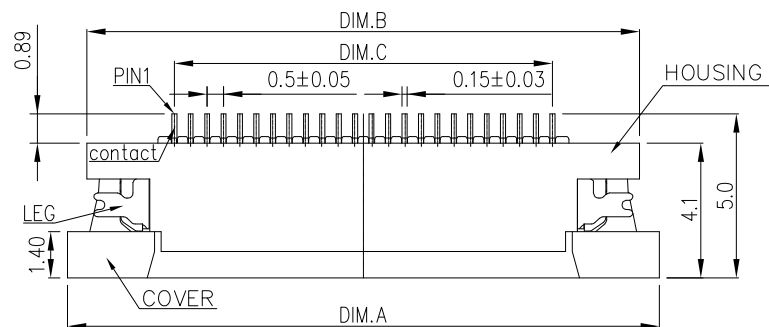

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

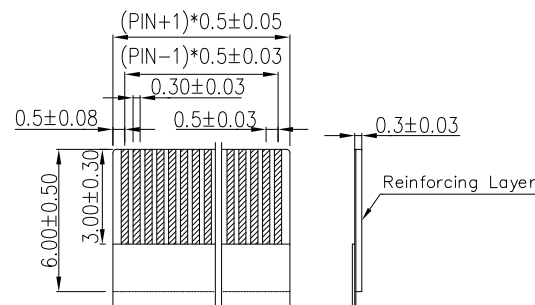

RECOMMENDED FFC
TOLERANCE: ± 0.05

SPEC :

1. Housing: Hight-Temp Plastic, UL94-V
Color: Nature(Lvory)(LCP)
2. Locker: Hight-Temp Plastic, UL94-V
Color: Black(LCP)
3. Contact: Phosphor Bronze(C5191)
4. Solder Tab: BRASS(C2680)
5. Operating Voltage (Max): 50V AC
6. Current Rating (Max): 0.5A DC
7. Operating Temperature Range : $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$

PIN	DIM.A	DIM.B	DIM.C	DIM.D	PIN	DIM.A	DIM.B	DIM.C	DIM.D
4	8.00	6.80	1.50	2.58	33	22.50	21.30	16.00	17.08
5	8.50	7.30	2.00	3.08	34	23.00	21.80	16.50	17.58
6	9.00	7.80	2.50	3.58	35	23.50	22.30	17.00	18.08
7	9.50	8.30	3.00	4.08	36	24.00	22.80	17.50	18.58
8	10.00	8.80	3.50	4.58	37	24.50	23.30	18.00	19.08
9	10.50	9.30	4.00	5.08	38	25.00	23.80	18.50	19.58
10	11.00	9.80	4.50	5.58	39	25.50	24.30	19.00	20.08
11	11.50	10.30	5.00	6.08	40	26.00	24.80	19.50	20.58
12	12.00	10.80	5.50	6.58	41	26.50	25.30	20.00	21.08
13	12.50	11.30	6.00	7.08	42	27.00	25.80	20.50	21.58
14	13.00	11.80	6.50	7.58	43	27.50	26.30	21.00	22.08
15	13.50	12.30	7.00	8.08	44	28.00	26.80	21.50	22.58
16	14.00	12.80	7.50	8.58	45	28.50	27.30	22.00	23.08
17	14.50	13.30	8.00	9.08	46	29.00	27.80	22.50	23.58
18	15.00	13.80	8.50	9.58	47	29.50	28.30	23.00	24.08
19	15.50	14.30	9.00	10.08	48	30.00	28.80	23.50	24.58
20	16.00	14.80	9.50	10.58	49	30.50	29.30	24.00	25.08
21	16.50	15.30	10.00	11.08	50	31.00	29.80	24.50	25.58
22	17.00	15.80	10.50	11.58	51	31.50	30.30	25.00	26.08
23	17.50	16.30	11.00	12.08	52	32.00	30.80	25.50	26.58
24	18.00	16.80	11.50	12.58	53	32.50	31.30	26.00	27.08
25	18.50	17.30	12.00	13.08	54	33.00	31.80	26.50	27.58
26	19.00	17.80	12.50	13.58	55	33.50	32.30	27.00	28.08
27	19.50	18.30	13.00	14.08	56	34.00	32.80	27.50	28.58
28	20.00	18.80	13.50	14.58	57	34.50	33.30	28.00	29.08
29	20.50	19.30	14.00	15.08	58	35.00	33.80	28.50	29.58
30	21.00	19.80	14.50	15.58	59	35.50	34.30	29.00	30.08
31	21.50	20.30	15.00	16.08	60	36.00	34.80	29.50	30.58
32	22.00	20.80	15.50	16.58					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

FPV-WZA12G-xx-LF
SERIES T T T LEADFREE
04-60 WAY
GOLD
HIGH 1.2mm
90°SMT UPPER CONTACT
ZIF

DESCRIPTION: 0.5PH 1.2H 抽屜臥貼上接