

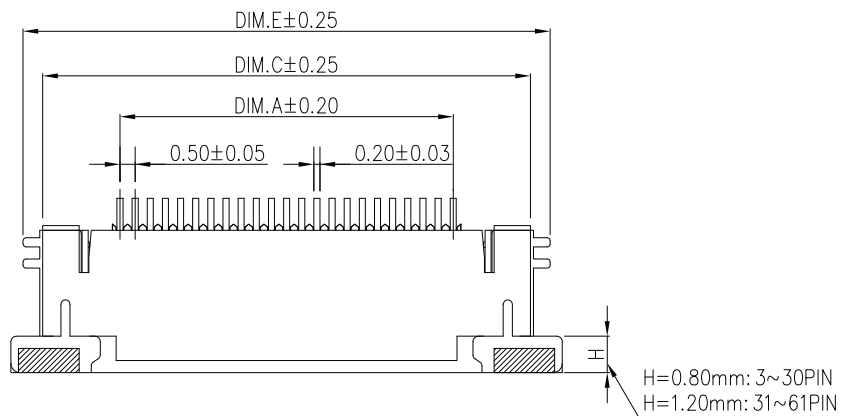

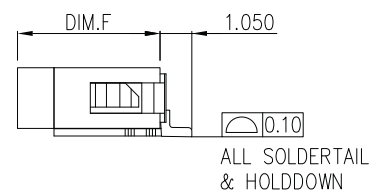


SPEC :


1. Housing: High-Temp Plastic, UL94-V
Color: Nature (Ivory) (PA46)
2. Locker: High-Temp Plastic, UL94-V
Color: Black (PA9T)
3. Contact: Phosphor Bronze (C5191)
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
4. Solder Tab: BRASS (C2680)
5. Temperature Rating: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
6. Dielectric Withstanding Voltage: 500V AC/Min

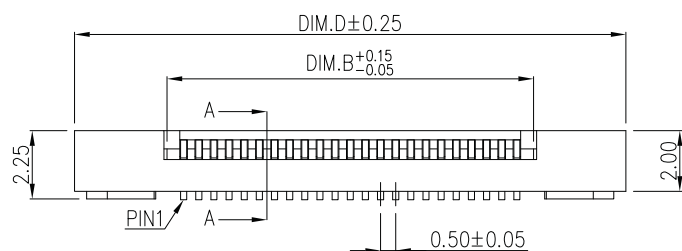

SECTION A-A

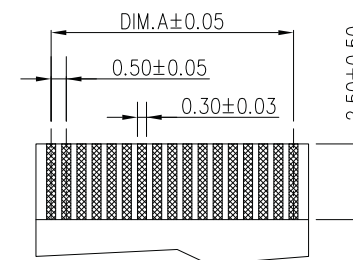

FFC/FPC DIMENSION
THICKNESS $0.30 \pm 0.03\text{mm}$

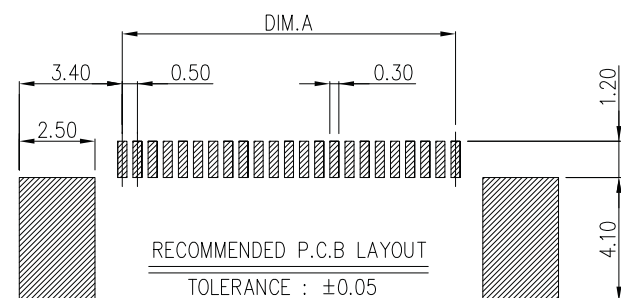

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm$

照片框

ORDER INFORMATION

FPV-WZA23R-xx-LF
SERIES
LEADFREE
04-61WAY
REEL
HIGH 2.25mm
UPPER CONTACT
90°SMT
ZIF

DESCRIPTION: 0.5PH 抽屜臥貼上接

● : 表示現有可提供PIN數

	PIN	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E	DIM.F		PIN	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E	DIM.F
	4	1.50	2.60	6.60	8.70	7.90	4.30		33	16.00	17.10	21.10	23.20	22.40	4.70
	5	2.00	3.10	7.10	9.20	8.40	4.30		34	16.50	17.60	21.60	23.70	22.90	4.70
	6	2.50	3.60	7.60	9.70	8.90	4.30		35	17.00	18.10	22.10	24.20	23.40	4.70
	7	3.00	4.10	8.10	10.20	9.40	4.30		36	17.50	18.60	22.60	24.70	23.90	4.70
	8	3.50	4.60	8.60	10.70	9.90	4.30		37	18.00	19.10	23.10	25.20	24.40	4.70
	9	4.00	5.10	9.10	11.20	10.40	4.30		38	18.50	19.60	23.60	25.70	24.90	4.70
	10	4.50	5.60	9.60	11.70	10.90	4.30		39	19.00	20.10	24.10	26.20	25.40	4.70
	11	5.00	6.10	10.10	12.20	11.40	4.30		40	19.50	20.60	24.60	26.70	25.90	4.70
	12	5.50	6.60	10.60	12.70	11.90	4.30		41	20.00	21.10	25.10	27.20	26.40	4.70
	13	6.00	7.10	11.10	13.20	12.40	4.30		42	20.50	21.60	25.60	27.70	26.90	4.70
	14	6.50	7.60	11.60	13.70	12.90	4.30		43	21.00	22.10	26.10	28.20	27.40	4.70
	15	7.00	8.10	12.10	14.20	13.40	4.30		44	21.50	22.60	26.60	28.70	27.90	4.70
	16	7.50	8.60	12.60	14.70	13.90	4.30		45	22.00	23.10	27.10	29.20	28.40	4.70
	17	8.00	9.10	13.10	15.20	14.40	4.30		46	22.50	23.60	27.60	29.70	28.90	4.70
	18	8.50	9.60	13.60	15.70	14.90	4.30		47	23.00	24.10	28.10	30.20	29.40	4.70
	19	9.00	10.10	14.10	16.20	15.40	4.30		48	23.50	24.60	28.60	30.70	29.90	4.70
	20	9.50	10.60	14.60	16.70	15.90	4.30		49	24.00	25.10	29.10	31.20	30.40	4.70
	21	10.00	11.10	15.10	17.20	16.40	4.30		50	24.50	25.60	29.60	31.70	30.90	4.70
	22	10.50	11.60	15.60	17.70	16.90	4.30		51	25.00	26.10	30.10	32.20	31.40	4.70
	23	11.00	12.10	16.10	18.20	17.40	4.30		52	25.50	26.60	30.60	32.70	31.90	4.70
	24	11.50	12.60	16.60	18.70	17.90	4.30		53	26.00	27.10	31.10	33.20	32.40	4.70
	25	12.00	13.10	17.10	19.20	18.40	4.30		54	26.50	27.60	31.60	33.70	32.90	4.70
	26	12.50	13.60	17.60	19.70	18.90	4.30		55	27.00	28.10	32.10	34.20	33.40	4.70
	27	13.00	14.10	18.10	20.20	19.40	4.30		56	27.50	28.60	32.60	34.70	33.90	4.70
	28	13.50	14.60	18.60	20.70	19.90	4.30		57	28.00	29.10	33.10	35.20	34.40	4.70
	29	14.00	15.10	19.10	21.20	20.40	4.30		58	28.50	29.60	33.60	35.70	34.90	4.70
	30	14.50	15.60	19.60	21.70	20.90	4.30		59	29.00	30.10	34.10	36.20	35.40	4.70
	31	15.00	16.10	20.10	22.20	21.40	4.70		60	29.50	30.60	34.60	36.70	35.90	4.70
	32	15.50	16.60	20.60	22.70	21.90	4.70		61	30.00	31.10	35.10	37.20	36.40	4.70

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION



FPV-WZA23R-xx-LF
SERIES
LEADFREE
04-61WAY
REEL
HIGH 2.25mm
UPPER CONTACT
90°SMT
ZIF

DESCRIPTION: 0.5PH 抽屜臥貼上接

煜倫股份有限公司



www.morethanall.com

W尺寸24mm以下

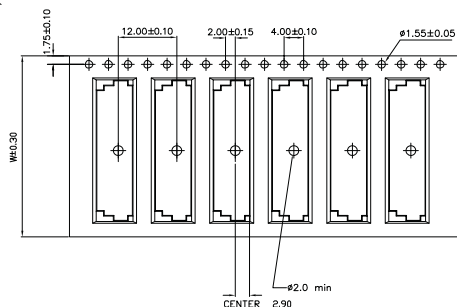

SECTION A-A


W尺寸32mm以上

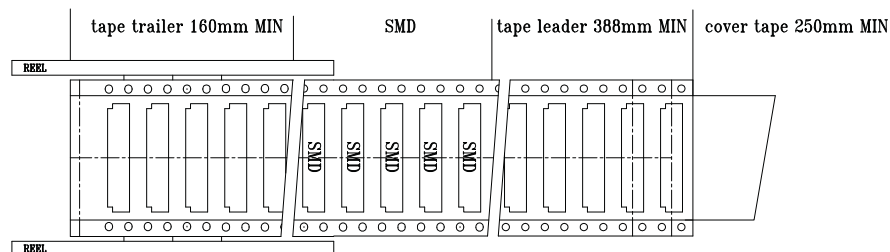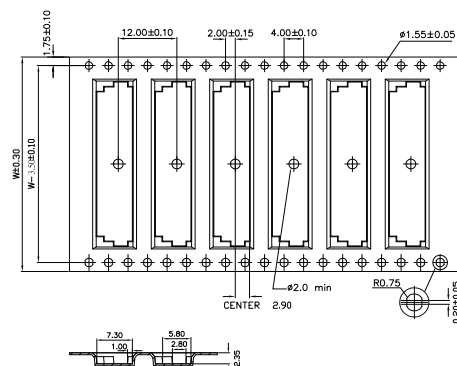

- 1.10sprocket hole pitch cumulative tolerance ± 0.20 .
- 2.Carrier camber is within 1 mm in 100mm.
- 3.Material:Black Conductive Polystyrene Alloy(UP-5000).
- 4.All dimensions meet EIA-481-3 requirements.
- 5.Thickness: 0.3 ± 0.05 mm.
- 6.Packing length per 22" reel: 74.5 Meters.
- 7.Components load per 13" reel:2000 pcs.

包裝規範

PIN數	W	包裝輪規格	外紙箱尺寸	一箱數量
04P~20P	24mm	13吋*24mm	34. 2*27. 5*34. 8cm	16K
21P~30P	32mm	13吋*32mm	34. 2*27. 5*34. 8cm	12K
31P~50P	44mm	13吋*44mm	34. 2*27. 5*34. 8cm	10K
51P~62P	56mm	13吋*56mm	34. 2*27. 5*34. 8cm	08K
一捲2K				

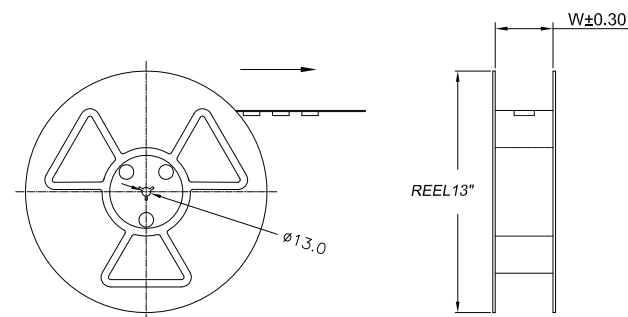

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

ORDER INFORMATION

FPV-WZA23R-xx-LF
SERIES
LEADFREE
04-61WAY
REEL
HIGH 2.25mm
UPPER CONTACT
ZIF
90°SMT

DESCRIPTION: 0.5PH 2.0H 抽屜臥貼上下接捲裝圖

煜倫股份有限公司

www.morethanall.com