


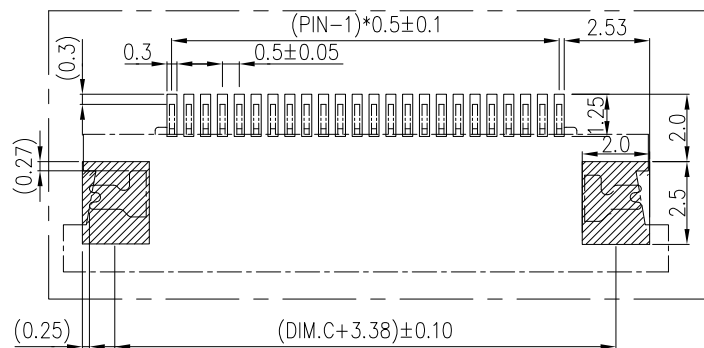

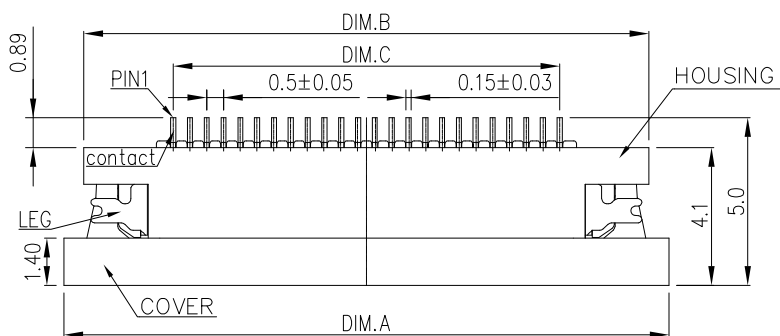


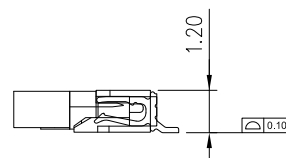

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05



ALL SOLDER AREAS

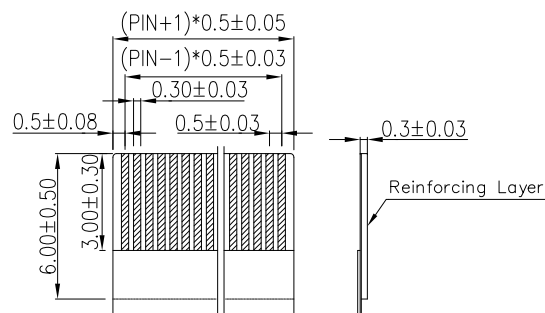

RECOMMENDED FFC
TOLERANCE: ±0.05

SPEC :

1. Housing: High-Temp Plastic, UL94-V
Color: Nature (Lvy) (LCP)
2. Locker: High-Temp Plastic, UL94-V
Color: Black (LCP)
3. Contact: Phosphor Bronze (C5191)
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
4. Solder Tab: BRASS (C2680)
5. Temperature Rating : -25°C ~ +85°C
6. Dielectric Withstanding Voltage : 500V AC/Min

	PIN	DIM.A	DIM.B	DIM.C	DIM.D		PIN	DIM.A	DIM.B	DIM.C	DIM.D
	4	8.00	6.80	1.50	2.58		33	22.50	21.30	16.00	17.08
	5	8.50	7.30	2.00	3.08		34	23.00	21.80	16.50	17.58
	6	9.00	7.80	2.50	3.58		35	23.50	22.30	17.00	18.08
	7	9.50	8.30	3.00	4.08		36	24.00	22.80	17.50	18.58
	8	10.00	8.80	3.50	4.58		37	24.50	23.30	18.00	19.08
	9	10.50	9.30	4.00	5.08		38	25.00	23.80	18.50	19.58
	10	11.00	9.80	4.50	5.58		39	25.50	24.30	19.00	20.08
	11	11.50	10.30	5.00	6.08		40	26.00	24.80	19.50	20.58
	12	12.00	10.80	5.50	6.58		41	26.50	25.30	20.00	21.08
	13	12.50	11.30	6.00	7.08		42	27.00	25.80	20.50	21.58
	14	13.00	11.80	6.50	7.58		43	27.50	26.30	21.00	22.08
	15	13.50	12.30	7.00	8.08		44	28.00	26.80	21.50	22.58
	16	14.00	12.80	7.50	8.58		45	28.50	27.30	22.00	23.08
	17	14.50	13.30	8.00	9.08		46	29.00	27.80	22.50	23.58
	18	15.00	13.80	8.50	9.58		47	29.50	28.30	23.00	24.08
	19	15.50	14.30	9.00	10.08		48	30.00	28.80	23.50	24.58
	20	16.00	14.80	9.50	10.58		49	30.50	29.30	24.00	25.08
	21	16.50	15.30	10.00	11.08		50	31.00	29.80	24.50	25.58
	22	17.00	15.80	10.50	11.58		51	31.50	30.30	25.00	26.08
	23	17.50	16.30	11.00	12.08		52	32.00	30.80	25.50	26.58
	24	18.00	16.80	11.50	12.58		53	32.50	31.30	26.00	27.08
	25	18.50	17.30	12.00	13.08		54	33.00	31.80	26.50	27.58
	26	19.00	17.80	12.50	13.58		55	33.50	32.30	27.00	28.08
	27	19.50	18.30	13.00	14.08		56	34.00	32.80	27.50	28.58
	28	20.00	18.80	13.50	14.58		57	34.50	33.30	28.00	29.08
	29	20.50	19.30	14.00	15.08		58	35.00	33.80	28.50	29.58
	30	21.00	19.80	14.50	15.58		59	35.50	34.30	29.00	30.08
	31	21.50	20.30	15.00	16.08		60	36.00	34.80	29.50	30.58
	32	22.00	20.80	15.50	16.58						

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

FPV-WZB12-xx-LF
SERIES T T T LEADFREE
04-60WAY
HIGH 1.2mm
BOTTOM/CONTACT
ZIF
90°SMT

DESCRIPTION: 0.5PH 1.2H 抽屜臥貼下接