
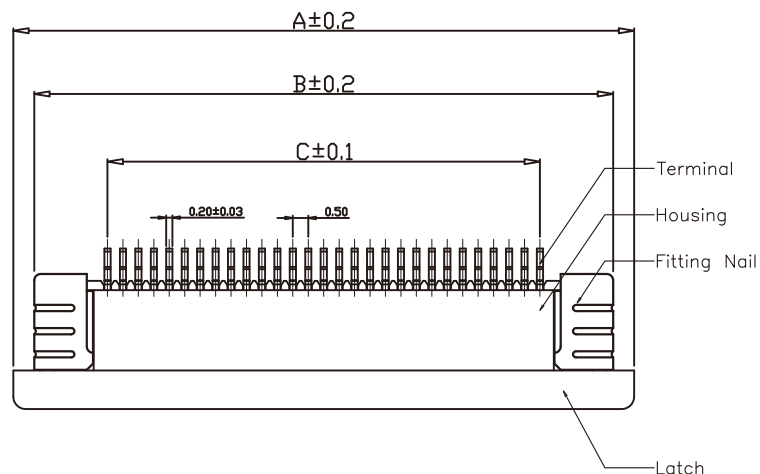
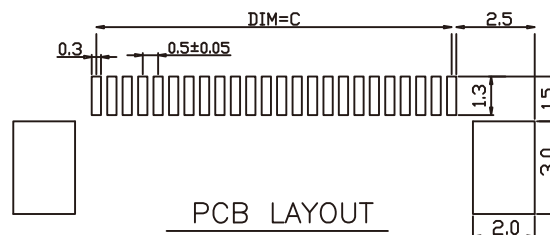
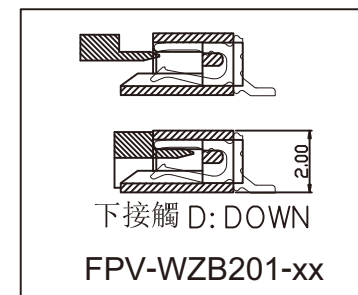
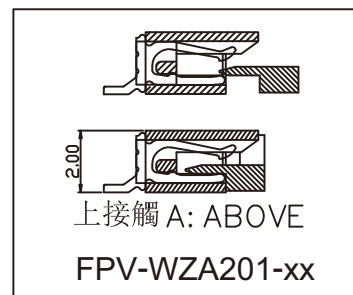


Material:

- 1.1 Housing: thermoplastic high temp. UL94V-0; Color: Natural.
- 1.2 Latch: thermoplastic high temp. UL94V-0; Color: Black.
- 1.3 Terminal: Copper Alloy.
- 1.4 Fitting Nail: Copper Alloy.



PIN NO.	DIM. A	DIM. B	DIM. C	DIM. D
4~N~60	N*0.5+5.6	N*0.5+4.6	N*0.5-0.50	N*0.5+0.60
DIM. E	4~N~34 E=5.25 ; 35~N~60 E=5.75			

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPV-WZx201-xx-LF

SERIES
LEADFREE
04~60WAY
HIGH 2.0mm
A: UPPER/CONTACT
B: BOTTOM/CONTACT
ZIF
90°SMT

DESCRIPTION: 0.5mm H=2.0 ZIF FPC SMT R/A CONNECTOR