

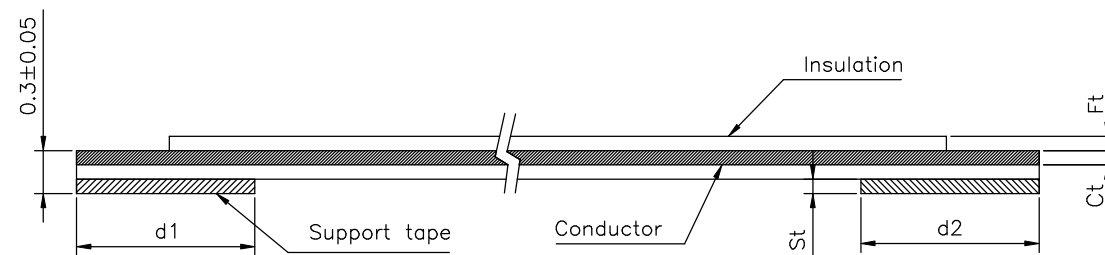


	1	2	3	4	5	6	7	8	9	0
J										
I										
H										
G										
F										
E										
D										
C										
B										
A										

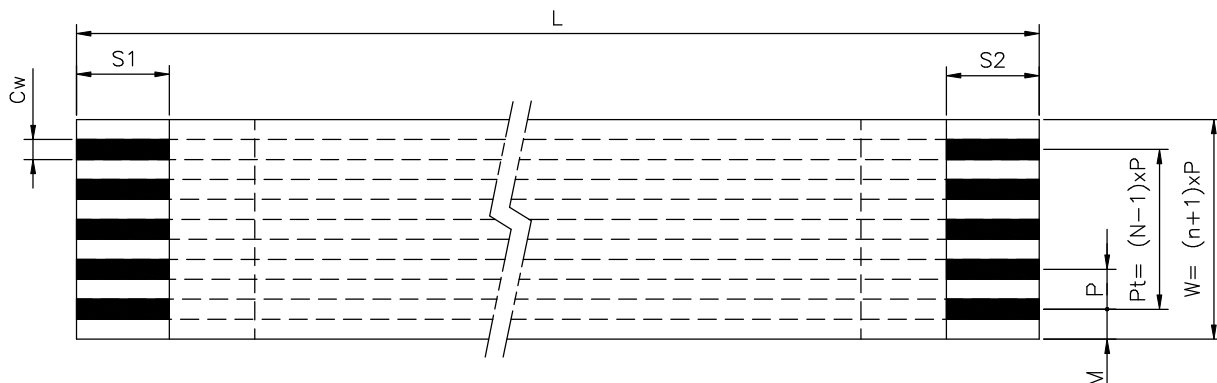

TOLERANCE:

Abbr.	TOLERANCE				
	P=0.5	P=0.8	P=1.0	P=1.25	P=2.54
P	±0.05	±0.08	±0.08	±0.10	±0.20
Pt	±0.08	±0.10	±0.10	±0.15	+0.2 -0.4
W	±0.08	±0.10	±0.10	±0.20	+0.2 -0.4
M	±0.08	±0.15	±0.15	±0.20	±0.30
Cw	±0.02	±0.03	±0.03	±0.03	±0.04
L	(30~100)±3, (101~300)±5, (301~600)±10, (Length more than 601mm)±15mm				

	Dimension
Ft±0.01	0.043
St±0.01	0.225

FPx-CAxx-xxx-LF
LEADFREE

RoHS Compliant

Customer P/N	MORETHANALL P/N	NO. of Conductor	Dimension												Support Tape Color
			P	Pt	L	W	M	CW	Ct±0.01	S1±1.0	S2±1.0	d1±2.0	d2±2.0		

MORETHANALL
CONNECTORS
ASSEMBLIES

焯倫股份有限公司

PART NO. FPx-CAxx-xxx

DWG NO. FPx-CAxx-xxx


FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION 

TOLERANCES ARE

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE