
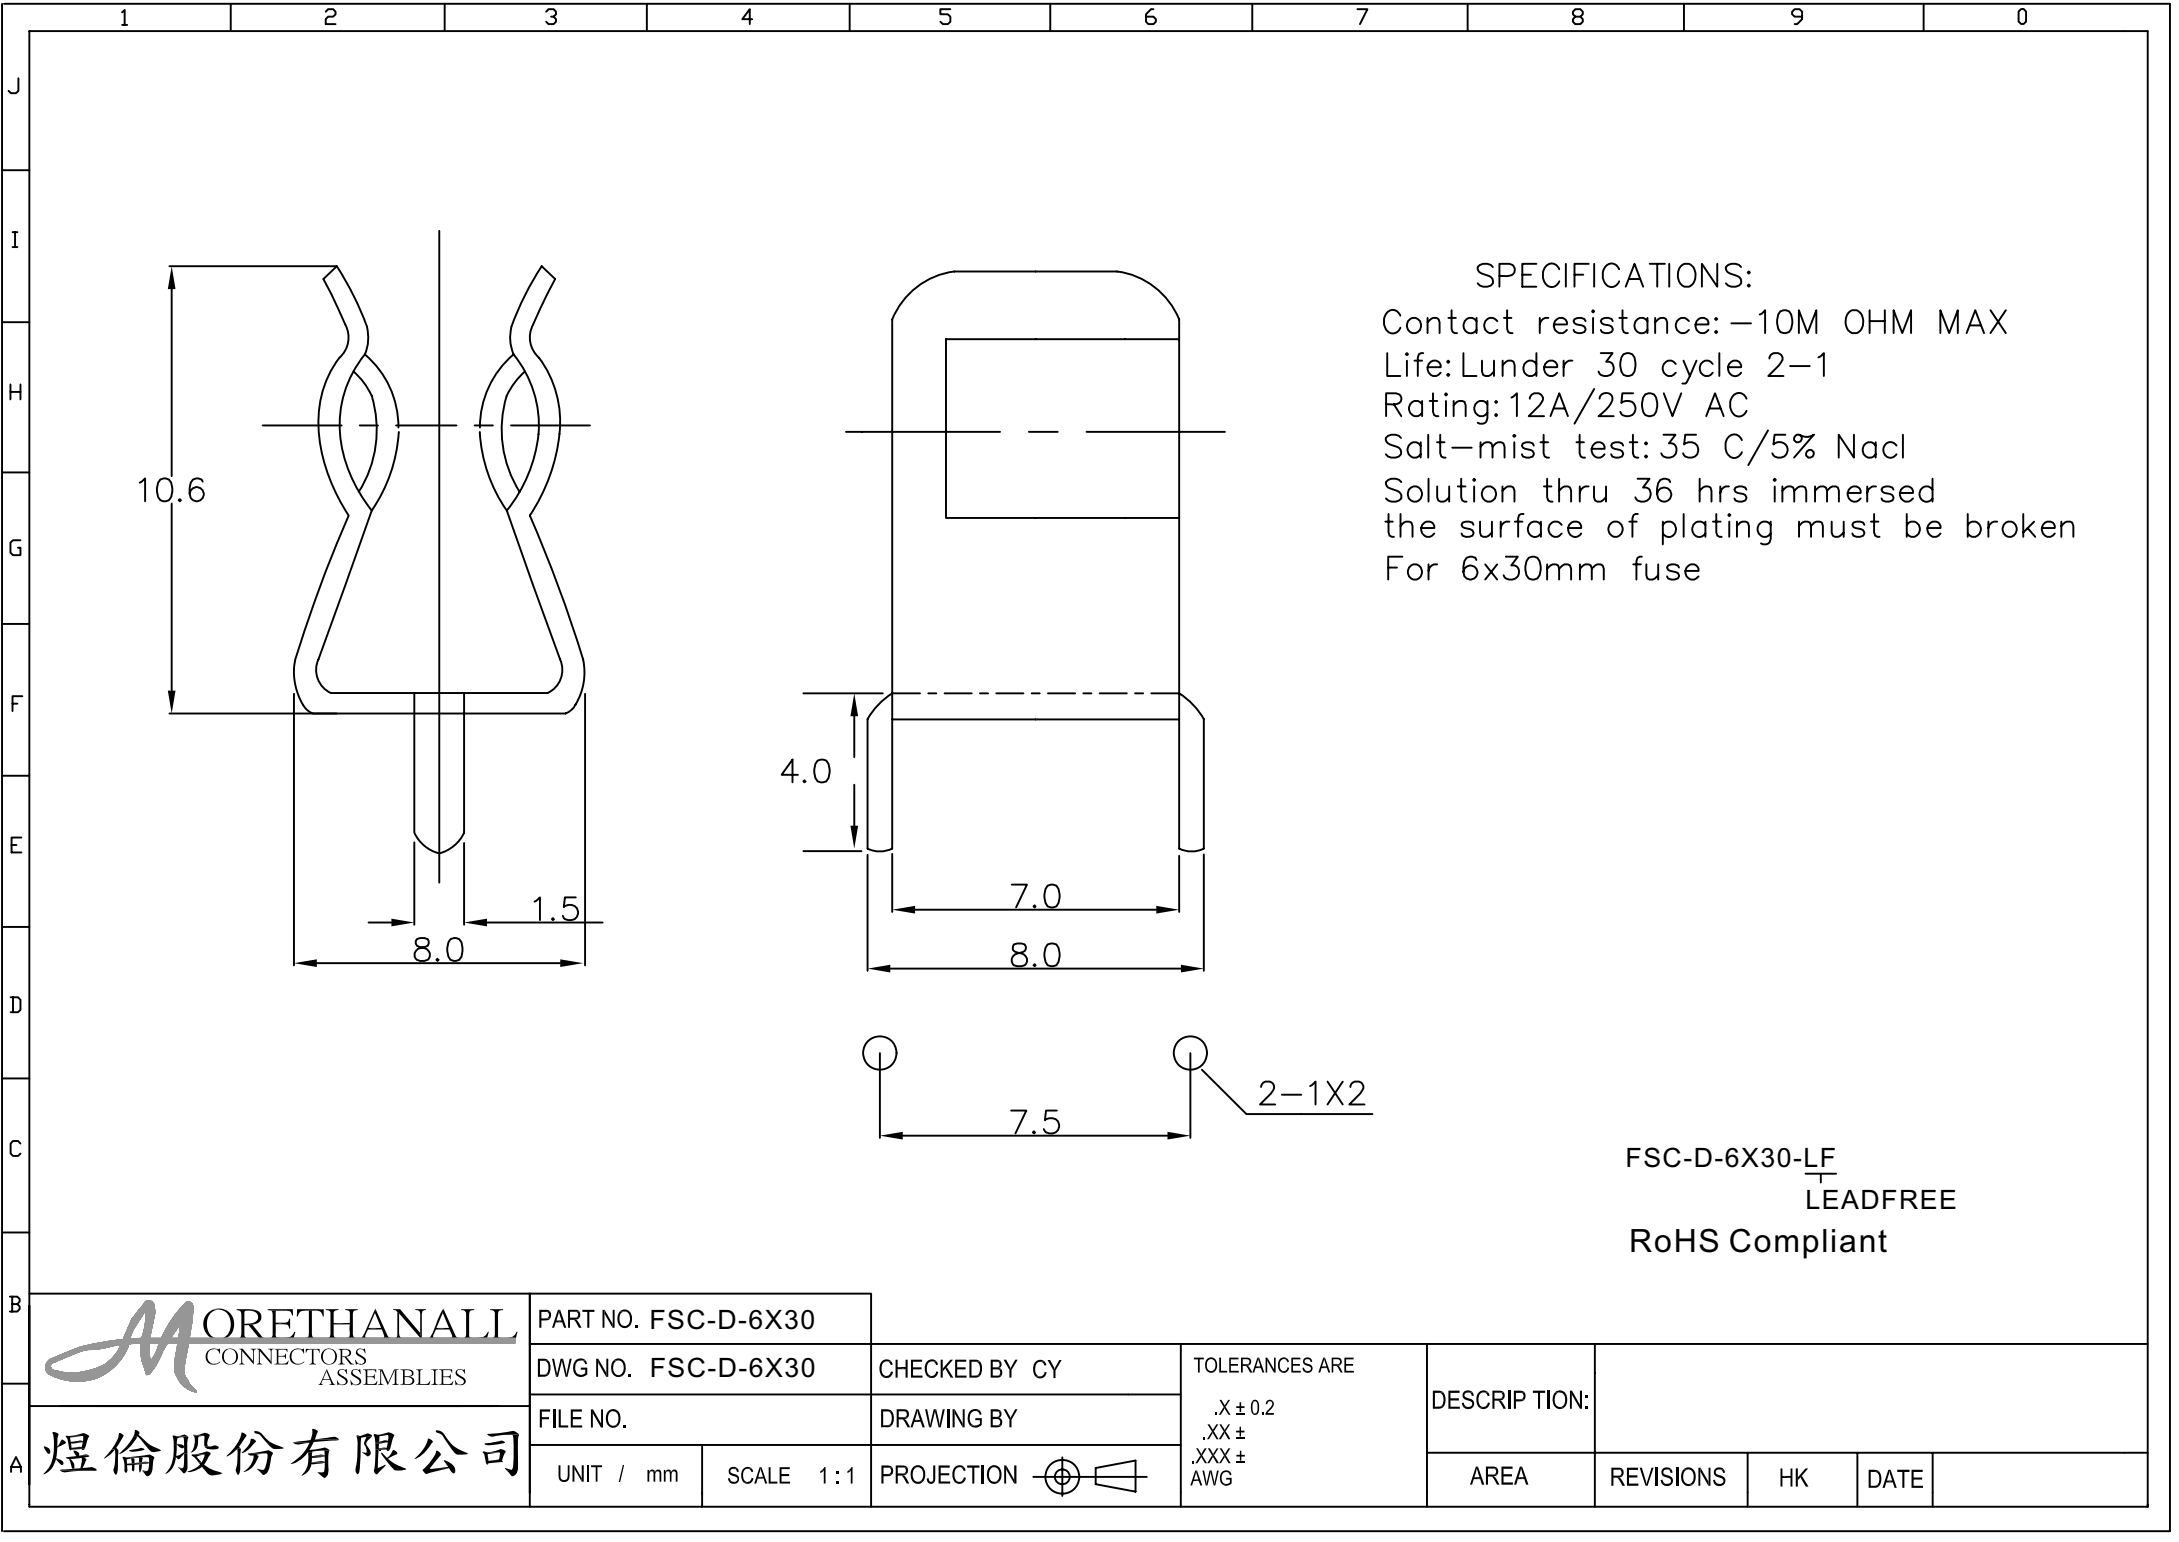




SPECIFICATIONS:  
Contact resistance: -10M OHM MAX  
Life: Lunder 30 cycle 2-1  
Rating: 12A/250V AC  
Salt-mist test: 35 C/5% Nacl  
Solution thru 36 hrs immersed  
the surface of plating must be broken  
For 6x30mm fuse

FSC-D-6X30-LF  
LEADFREE  
RoHS Compliant

|   |                                                                                    |                     |           |            |            |                                                                                       |               |           |    |      |  |
|---|------------------------------------------------------------------------------------|---------------------|-----------|------------|------------|---------------------------------------------------------------------------------------|---------------|-----------|----|------|--|
| B |  | PART NO. FSC-D-6X30 |           |            |            |                                                                                       |               |           |    |      |  |
|   |                                                                                    | DWG NO. FSC-D-6X30  |           | CHECKED BY | CY         | TOLERANCES ARE<br>.X ± 0.2<br>.XX ±<br>.XXX ±<br>AWG                                  | DESCRIP TION: |           |    |      |  |
|   |                                                                                    | FILE NO.            |           | DRAWING BY |            |                                                                                       |               |           |    |      |  |
|   | A                                                                                  | 煜倫股份有限公司            | UNIT / mm | SCALE 1:1  | PROJECTION |  | AREA          | REVISIONS | HK | DATE |  |