




Fuse-links

Miniature Glass Fuse 5x20mm

Fast Blow (Quick Acting)

F-125V/250V

pluggable into miniature fuse-holder or directly mountable on printed circuit boards

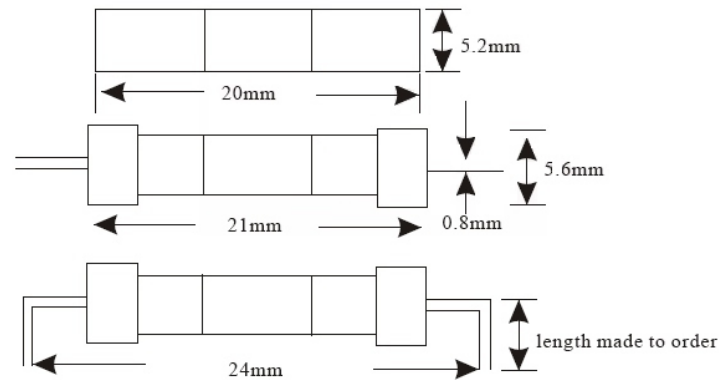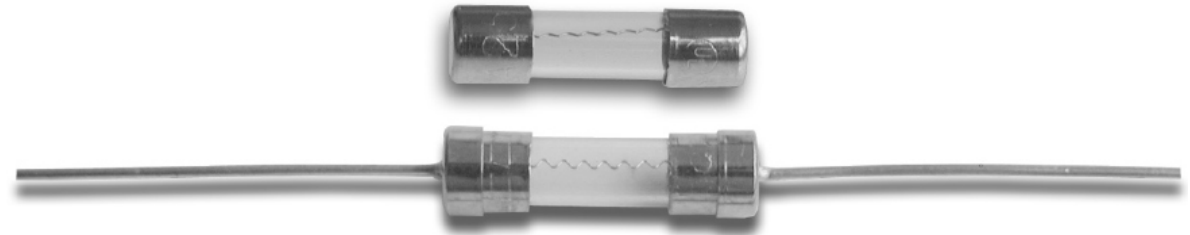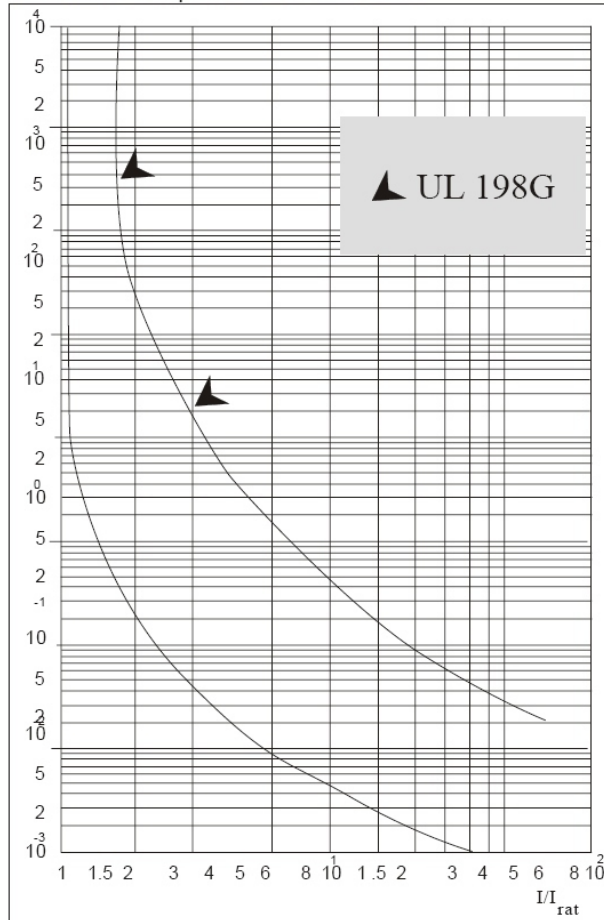

Time current characteristics

$n \times I_n$	$1.1 \times I_n$	$1.35 \times I_n$	$2.0 \times I_n$
Rat. current I_n	min.	max.	max.
100mA-10A	4h	1h	120s

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FSG-5X20-1A-LF
SERIES 1A LEADFREE
5.2X20mm

DESCRIPTION: