

Fuse link s 50SG
Mini atur e Glas s Fuse 5x20mm
Slow Blow (Time Lag)
T-125V/250V

pluggabl e into miniatur e fuse holde r or directly
mountabl e on printe d circui tboards


Standard s and approvals

UL- 248

CUL




TYP EDIMENSION

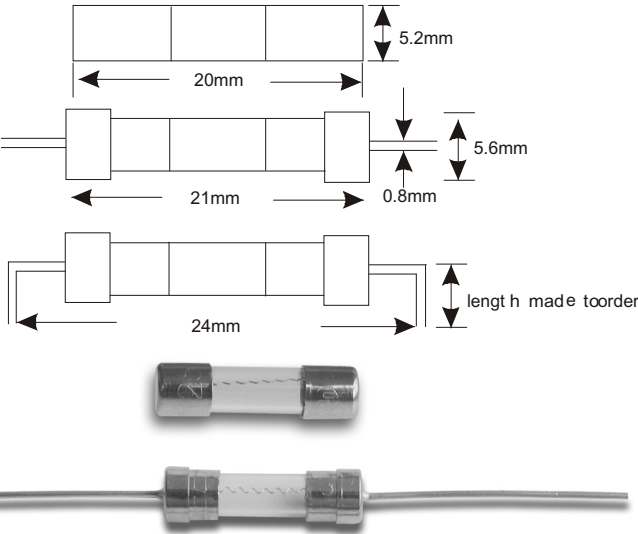

Tim e curren t characteristics

Rat. curren t In	nx In	1.1 x In	1.35 x In	2.0 In	
		min.	max.	min.	max.
500ma- 3A		4h	1h	5s	2min
3.15A- 10A		4h	1h	12s	2min

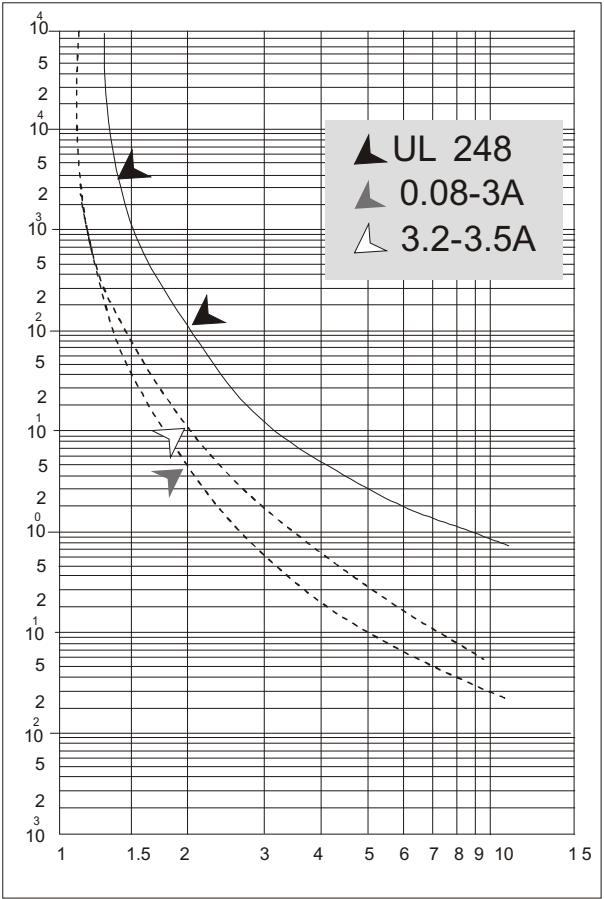

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FSG-5X20SB-3A-LF

SERIES

3A

LEADFREE

SLOW BLOW

5.2X2.0mm

DESCRIPTION: