

Fuse link s 50SG

Mini atur e Glas s Fuse 5x20mm

Slow Blow (Time Lag)


T-125V/250V

pluggabl e into miniatur e fuse holde r or directly mountabl e on printe d circui tboards


Standard s and approvals

UL- 248

CUL




TYP EDIMENSION

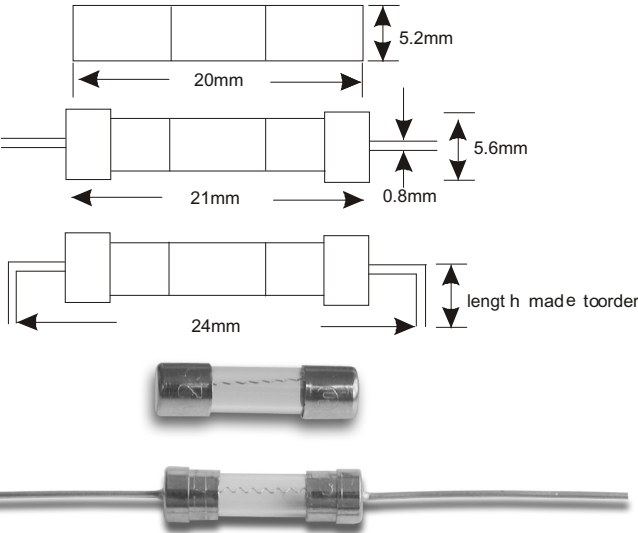

Tim e current characteristics

Rat. current In	1.1 x In		1.35 x In		2.0 In	
	min.		max.		min.	max.
500ma- 3A	4h		1h		5s	2min
3.15A- 10A	4h		1h		12s	2min

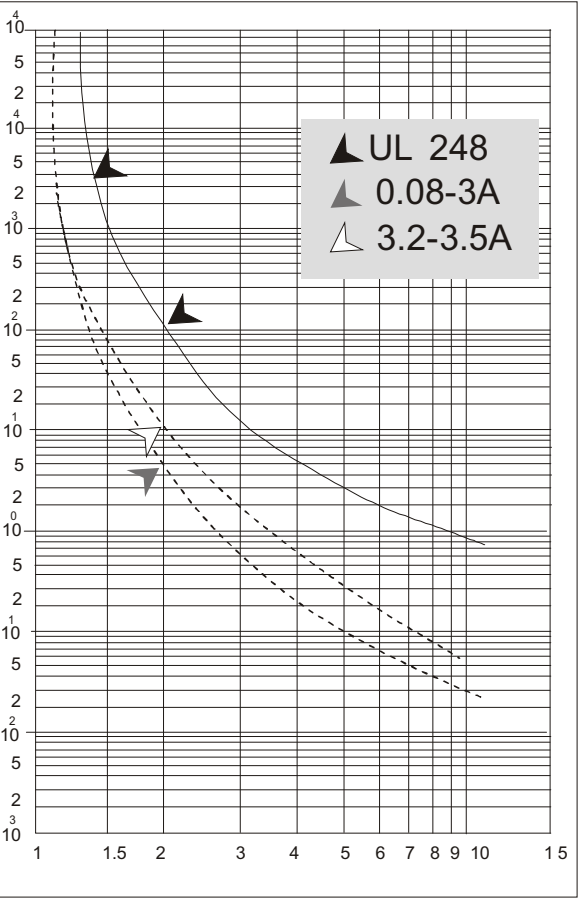

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FSG-5X20SB-xxx-LF

SERIES

5.2X2.0mm

LEADFREE

0.1A:100mA
0.8A:800mA

1A:1A
15A:15A

SLOW BLOW

DESCRIPTION:

Type:50SG

TYPE	LEAD WIRE	FORMING PITCH, LENGTH	RATED CURRENT	RATED VOLTAGE	VOLTAGE DROP	Fusing time at 10xIn	BREAKING CAPACITY	APPROVAL
50SG	L	P:xx, L:xx	100mA	125V/250V	2400	0.037	125Vac 10KA 250Vac 200A	CUL
			125mA		1800	0.09		UL
			150mA		1700	0.11		
			160mA		1600	0.12		
			180mA		1500	0.13		
			200mA		1300	0.21		
			250mA		1000	0.25		
			300mA		900	0.54		
			315mA		850	0.6		
			400mA		700	0.83		
			500mA		600	1.5		
			600mA		550	2.7		
			700mA		500	3.9		
			750mA		450	4.2		
			800mA		400	6.2		
			1A		350	11		
			1.25A		300	16		
			1.5A		275	24		
			1.6A		270	26		
			2A		235	48		
			2.5A		215	84		
			3.0A		200	110		
			3.15A		190	120		
			4A		160	190		
			5A		135	205		
			6A		150	235		
			7A		187	270		
			8A		205	301		
			10A		235	351		
			12A					
			13A					
			15A					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FSG-5X20SB-xxx-LF

SERIES

5.2X2.0mm

LEADFREE

0.1A:100mA
0.8A:800mA

1A:1A
15A:15A

SLOW BLOW

DESCRIPTION: