
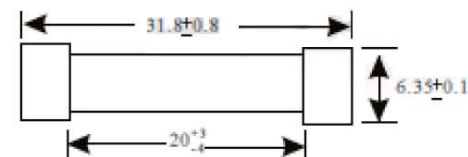


# Miniature Glass fuse 6.35x31.75mm Fast Blow (Normal Type) F-125V/250V

pluggable into miniature fuse-holder or directly  
mountable on printed circuit boards

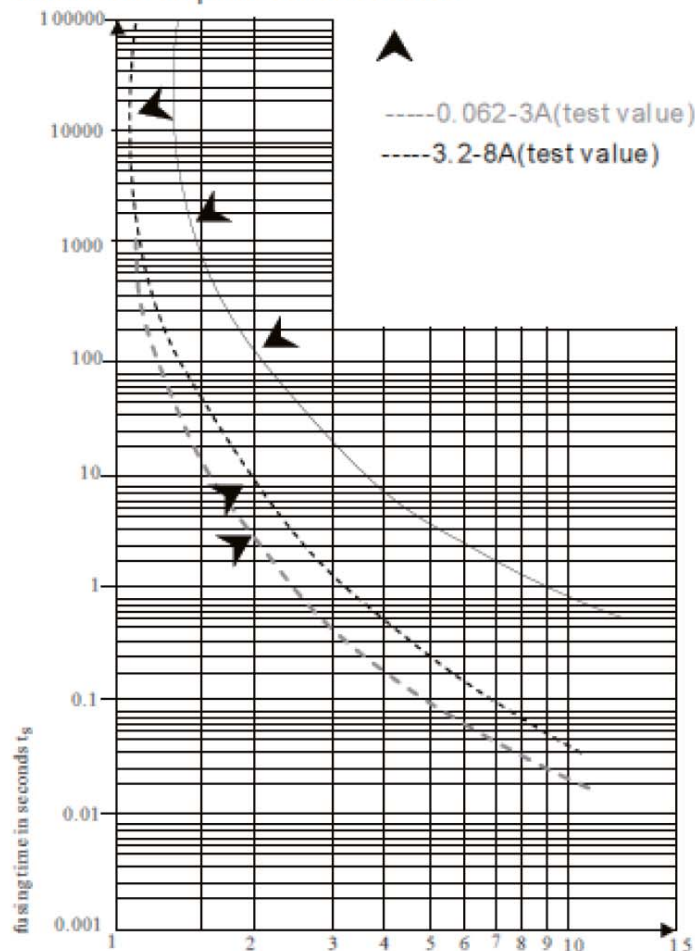

Time current characteristics

| Rat. current $I_n$ | $1.1 \times I_n$ |      | $1.35 \times I_n$ |      | $2.0 \times I_n$ |      |
|--------------------|------------------|------|-------------------|------|------------------|------|
|                    | min.             | max. | min.              | max. | min.             | max. |
| $\leq 3A$          | 4h               |      |                   | 1h   |                  | 120s |
| $> 3A$             | 4h               |      |                   | 1h   |                  | 120s |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ± 1°

照片框

ORDER INFORMATION

FSG-6X32-32A-LF

SERIES

32A

LEADFREE

6.3X32mm

DESCRIPTION: