



產品規格 Specifications :

1. 適用範圍：5.2x20mm 保險絲座。

Available Range : 5.2x20mm fuse block.

2. 形狀及尺寸如下圖。 單位：mm

Shape & Size as following illustrations. Unit : mm

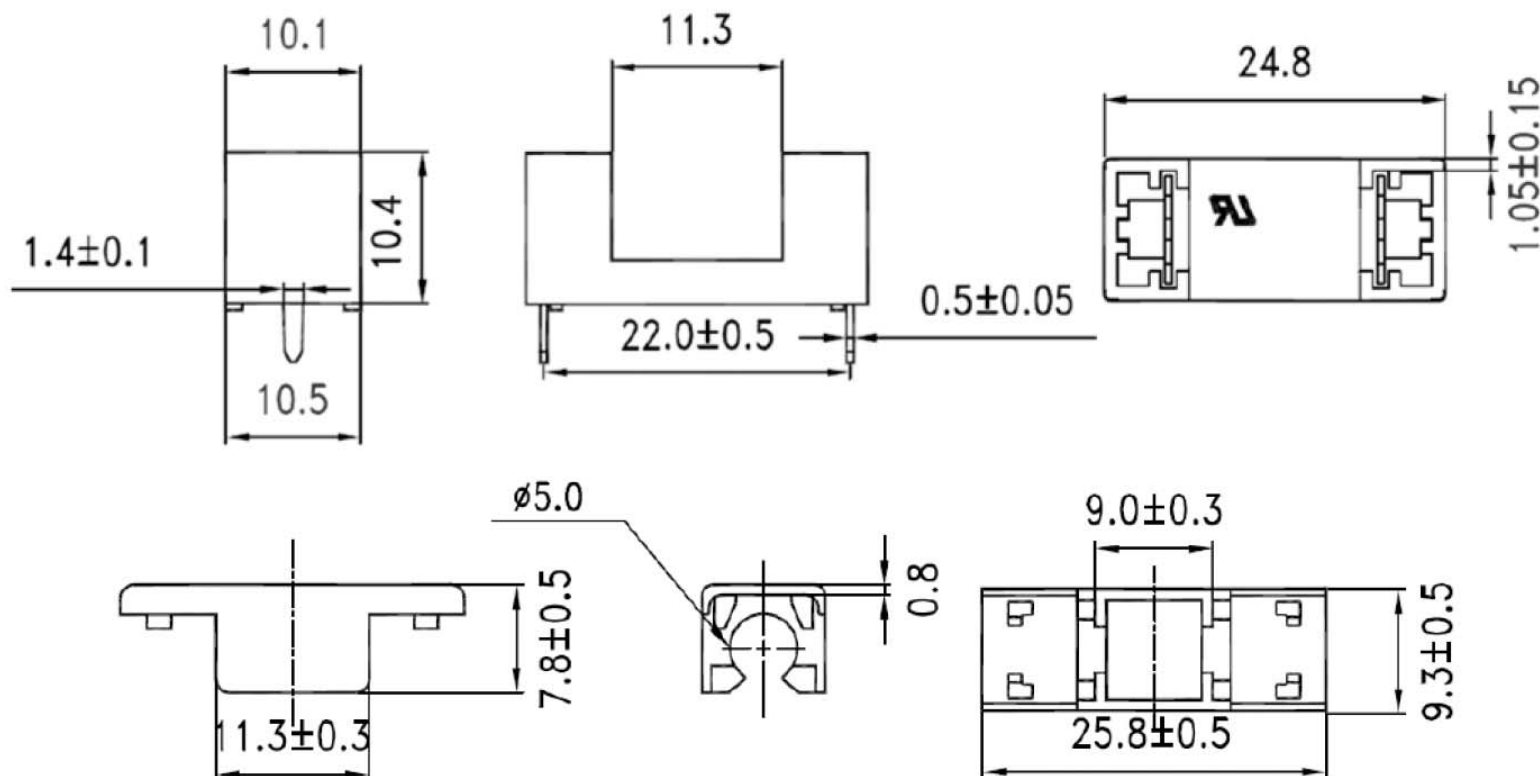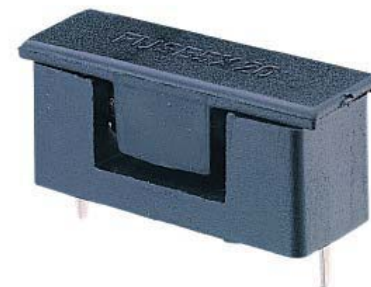

公差 Tolerance : ±0.2

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

FSH-DCBK-5X20-LF
SERIES | | | LEADFREE
| | | 5X20mm
| | | BLACK
CAP
DIP 180°

DESCRIPTION:

3. 材料：聚醯胺66、黃銅鍍錫。

Material： Polyamide 66, Tin Plated Brass.

4. 電性特性 Electrical Characteristics：

4.1 額定電流 / 電壓：6.3A / 250V。

Rated Current / Voltage：6.3A / 250V.

4.2 介電強度：最小交流電壓500V(60秒)。

Dielectric Strength：AC 500V Min(60 Seconds).

4.3 絕緣阻抗：最小100MΩ(在500V DC)。

Insulation Resistance：100MΩ Min (at 500V DC).

4.4 溫升：最大50℃。(使用短路棒測試)

Temperature Rise：50℃ Max. (Using a shorting bar test)

4.5 電壓降：最大20mV。

Voltage Drop：20mV Max.

4.6 絕緣體耐燃等級：UL 94 V-0。

Insulation body：Flame retarding UL 94 V-0.

5. 機械特性 Mechanical Properties：

第一次插拔的力量：≥1公斤。

The insertion and pulling forces of the first time：≥1Kgf.

6. 可焊性和焊接耐熱性 Solderability And Soldering Heat Resistance：

Solderability 可焊性	245℃/3 sec. acc. to IEC 60068-2-20,Test Ta,method 1
Soldering Heat Resistance 焊接耐熱性	260℃/10 sec. acc. to IEC 60068-2-20,Test Tb,method 1

7. 儲存方式及期限 Storage Methods And Duration：

7.1 儲存條件：封口須保持完整性, 儲存溫度25℃(+5℃, -10℃)、

溼度40%RH(+30%RH, -20%RH)。

Storage conditions：Package need to be sealed completely, temperature 25℃(+5℃, -10℃)、relative humidity 40%RH(+30%RH, -20%RH).

7.2 保存期限：未拆包為六個月，建議拆包後為一星期，產品拆包後易有氧化的風險，如未使用完請封口。

Expiration date：For packing products：6 months , For unpacking products：recommend one week. Due to the risk of oxidation for unpacking product, please seal completely the package for the remainders.

8. 包裝方式 Packing：1000 pcs/bag.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FSH-DCBK-5X20-LF
SERIES | LEADFREE
5X20mm
BLACK
CAP
DIP 180°

DESCRIPTION: