
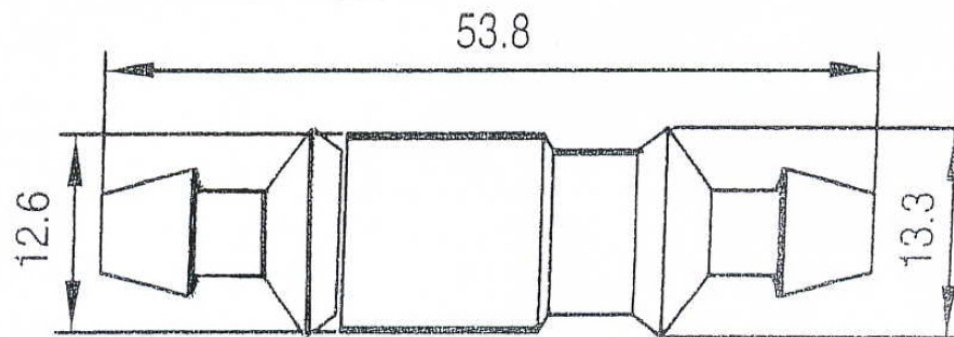


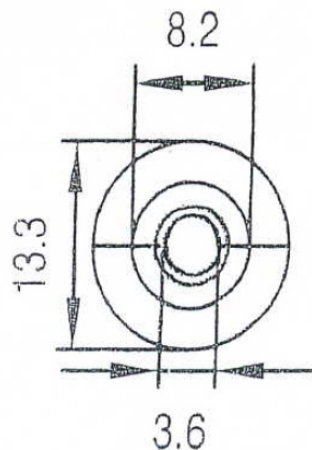

Specification :

A > Rated Current : 20A

B > Insulation Resistance At 500V DC : 100MΩ MIN.

C > Contact Resistance : 5mΩ At 1A DC

D > Dielectric Strength For 60 Second : AC 1500V MIN.

E > Bady Material : Nylon

Available Wire size : 18# ~ 14#

FUSE HOLDER FOR 6.35x(22.0~31.75)mm FUSE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FSH-H53-6X30-LF
SERIES LEADFREE
6.35X30mm
HIGH 53.8mm

DESCRIPTION: