


IN-LINE FUSE HOLDER SPRING

1/4 × 1-1/4" (6.3 × 32 mm or 6.3 × 30 mm) FUSES

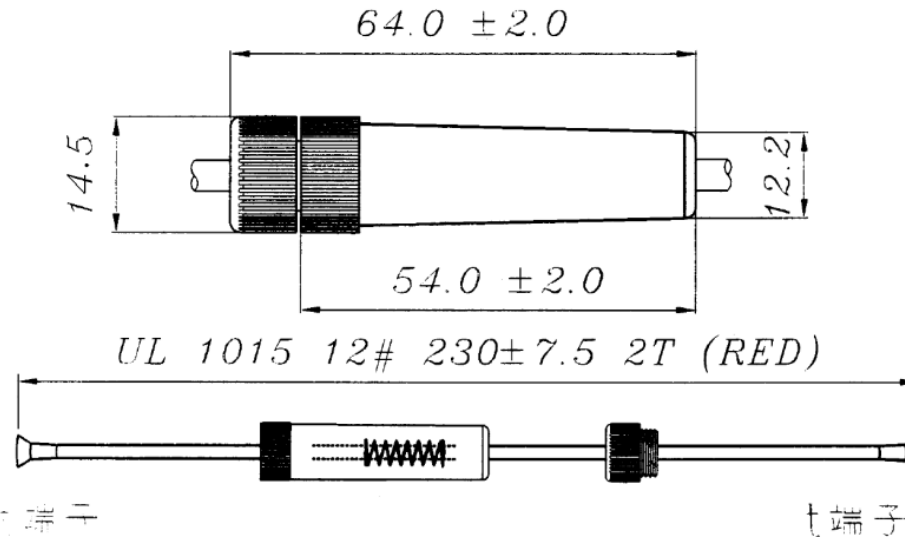

SPECIFICATIONS :

- A Rated Current: 20 A
 - B Insulation Resistance At 500V DC: 100M Ω Min.
 - C Contact Resistance: 5 m Ω At 1 A DC
 - D Dielectric Strength For 60 Seconds: AC 2000 V Min.
 - E Body Material: Bakelite
 - F Supply Standard UL Wire-AWG/Length : 12# AWG/ 8" Loop
- * Screw Type
- *Contact : Brass, Tin/Nickel Plated
- *With Other Wire Size Or Lengths Available On Special Order
- *To Install Fuses With "Loop" Type Wires, Simply Cut Loop Into Two Form Separate Wires Of Desired Length.

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

FSH-H64-6X30-LF
SERIES | LEADFREE
6.35X30mm
HIGH 64mm

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

DESCRIPTION: