

IN-LINE FUSEHOLDER

Specifications:


Applicable : For fuse type MFB, MFU, MFL and MFE(AGU)

Max. electrical rated: 60A 32V

Insulation body: Bakelite

Contacts : Brass

Range of wire gauge #8~#12

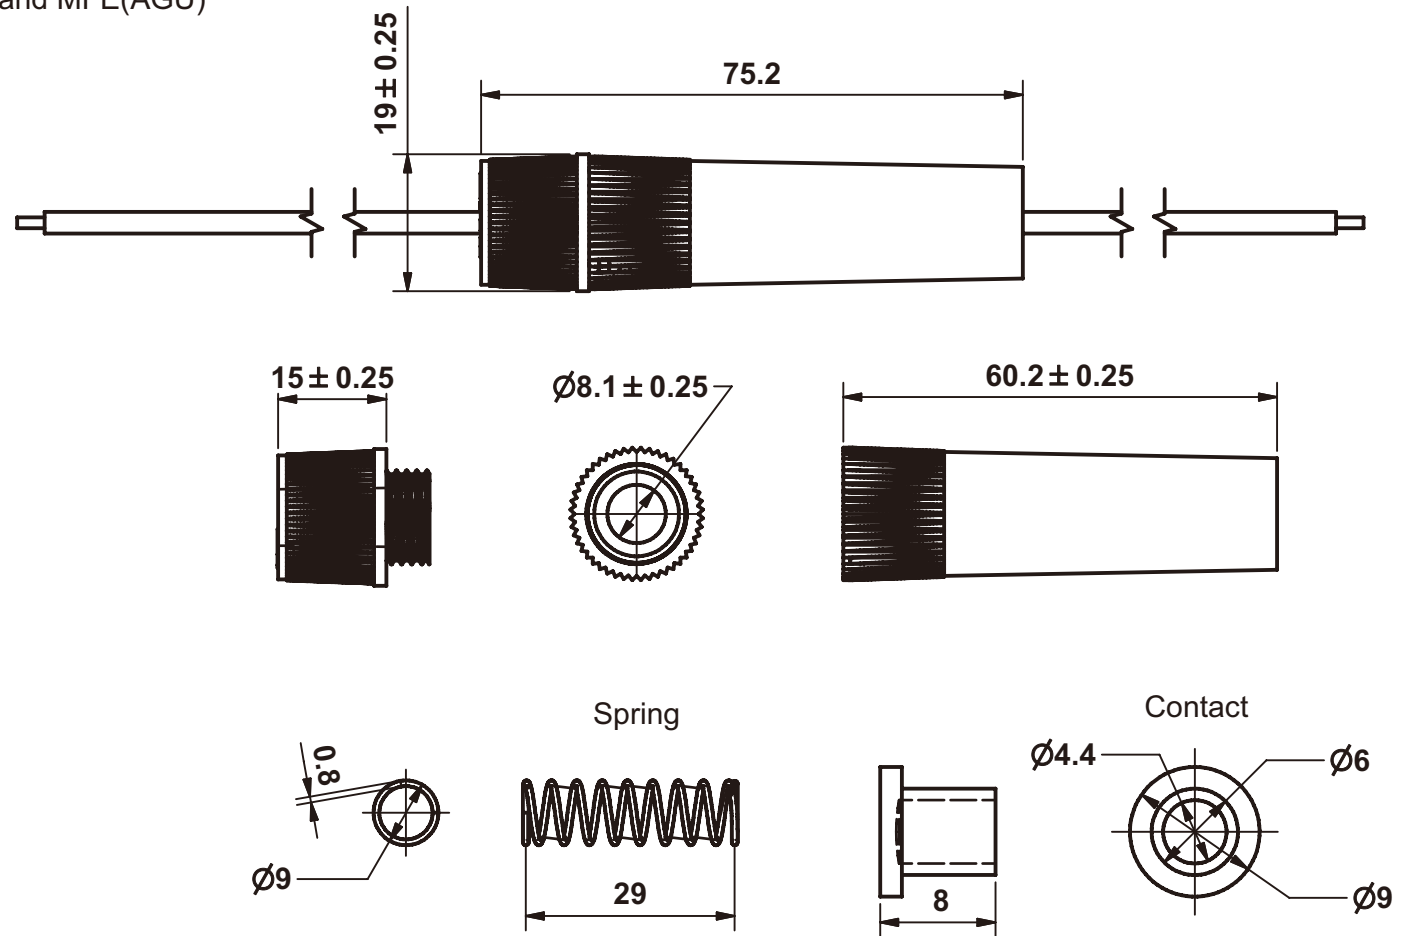

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.50
.XX ± 0.25
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FSH-H75-10X38-LF

SERIES

LEADFREE

10.3X38.1mm

HIGH 75.2mm

DESCRIPTION: In-Line Fuseholder