


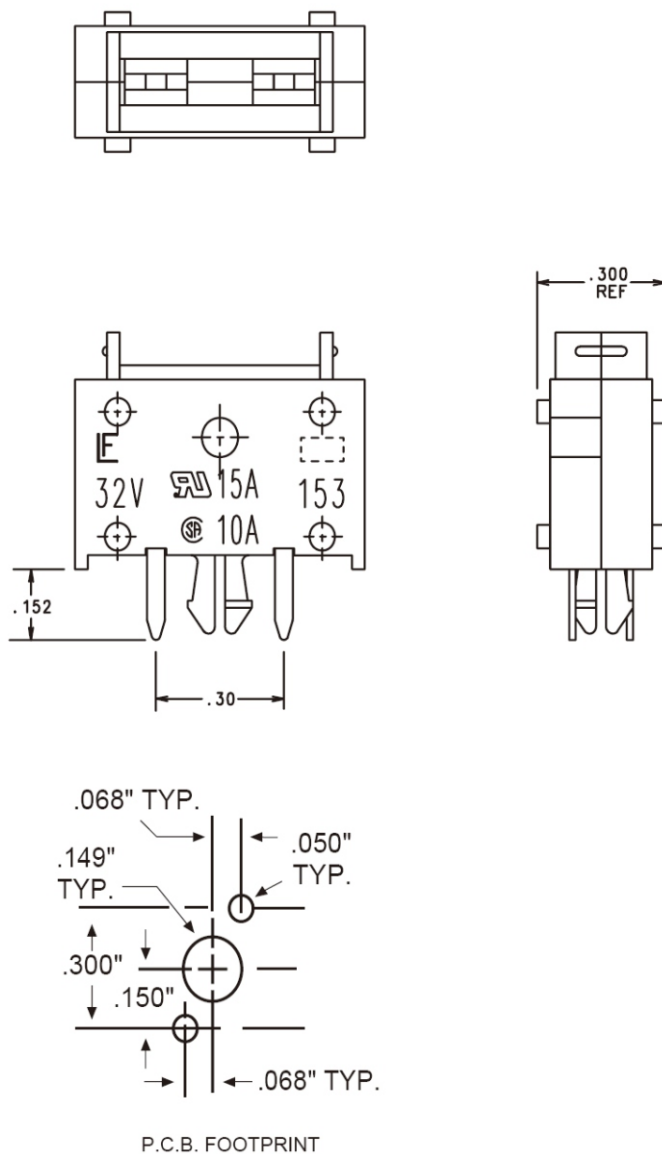

P.C.B. FOOTPRINT

Specifications

Max Voltage Rating:

32V

Max Current Rating:

UL: 20A

UR: 15A

CSA: 10A

Approvals:

UL Listed

UL Recognized

CSA Certified (File: 007316_0_000)

Body Material:

Thermoplastic UL 94-V0, heat-resistant

Clip Material:

Copper alloy, Tin-plated finish

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

ORDER INFORMATION

FUA-SD076P-02-LF

SERIES

LEADFREE

02 WAY

POST

ROW 7.62mm

DIP 180°

FEMALE

DESCRIPTION: