


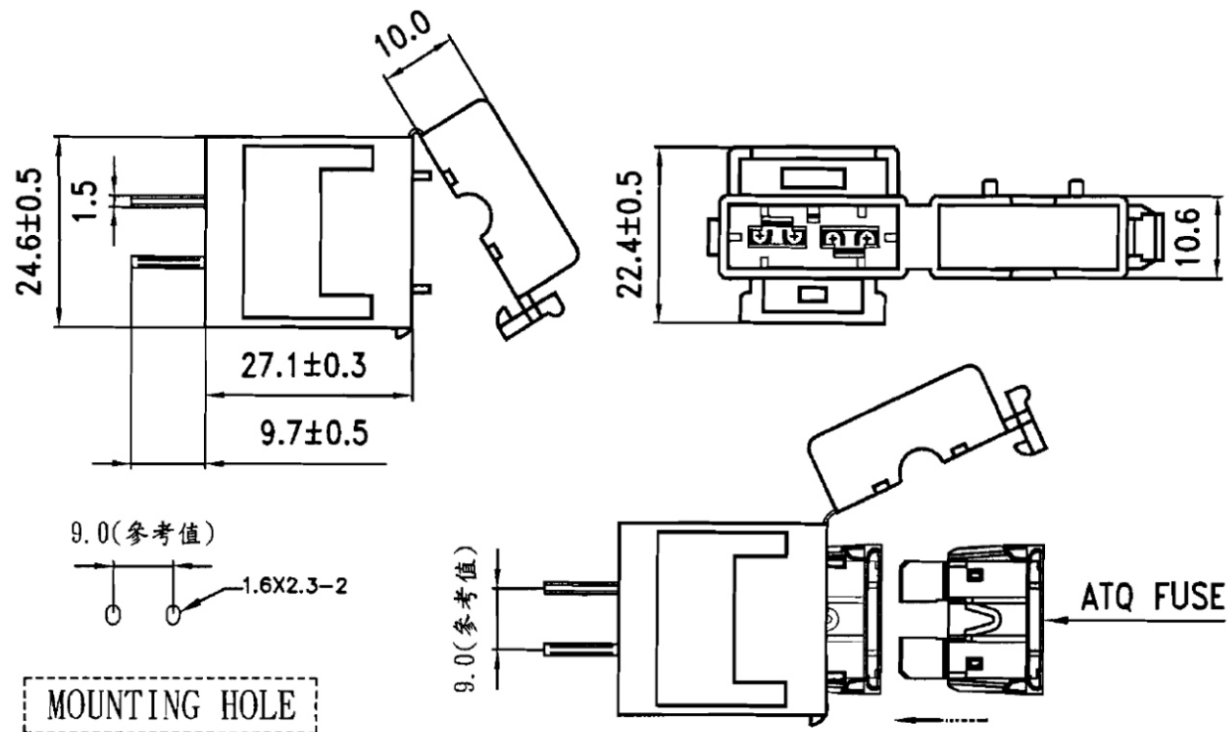

組合圖

SPECIFICATIONS :

- A. Rated Current : 30A
- B. Insulation Resistance At 500V DC : 100M Ω Min
- C. Contact Resistance : 5 m Ω At 1A DC
- D. Dielectric Strength For 60 Seconds : AC 1500V Min
- * Interlock For Multiple Mounting
- * Contact : — Nickel Plated Copper Alloy
- * Insulating Body : Flame Retarding UL 94 V0 Thermoplastic Material

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

FUA-SD090-02-LF
SERIES | | LEADFREE
| | 02 WAY
| | ROW 9.0mm
| | DIP 180°
| | FEMALE

DESCRIPTION:

IN-LINE FUSE HOLDER
FOR AUTO FUSES ATQ TYPE