

FUSE CLIP P.C.BOARD TYPE FOR
ATS BLADE FUSE
SPECIFICATIONS:

*Electical:Rating for currents up to 20A

*Material:Phosphor Bronze Thickness=0.3mm

*Finish:Bright Tin plated

#Specifications :

1.Insertion & Extraction Force=1kg.Min.





2.Dielectric Strength For 60 Seconds=AC 500 V Min.

3.Suitable Rated Current=20A 250V

4.Insulation Resistance At 500 V DC=100MΩ Min

5.Temperature Rise=50℃ Max.

6.Voltage Drop=20m V Max.

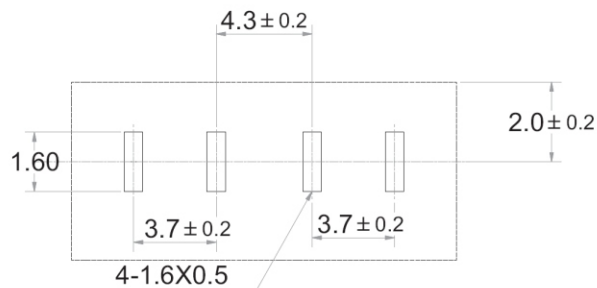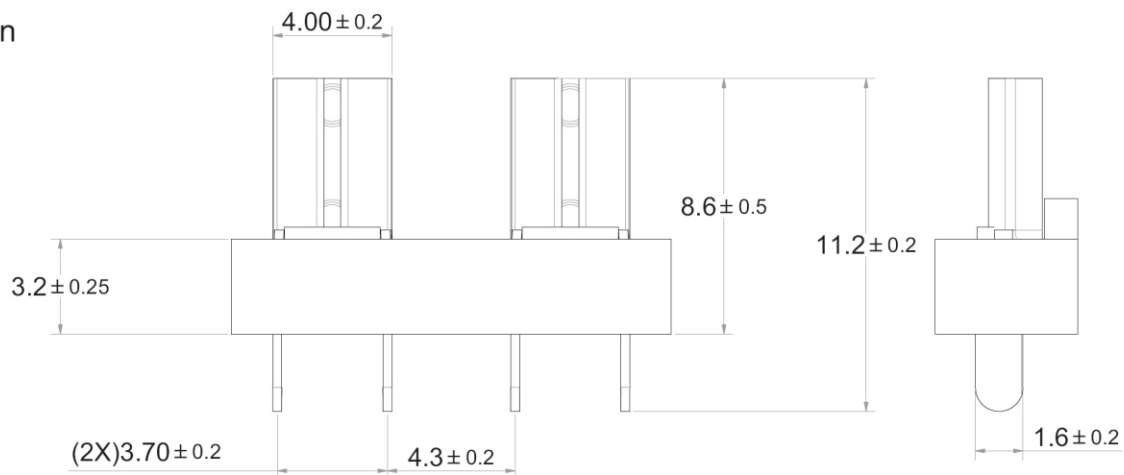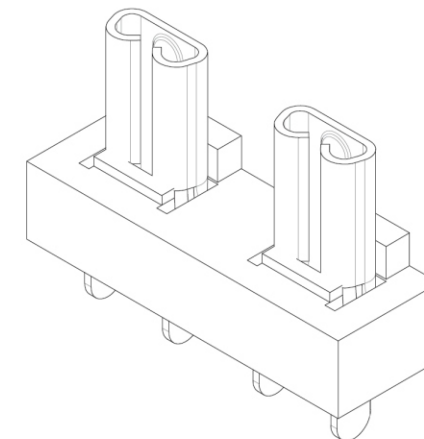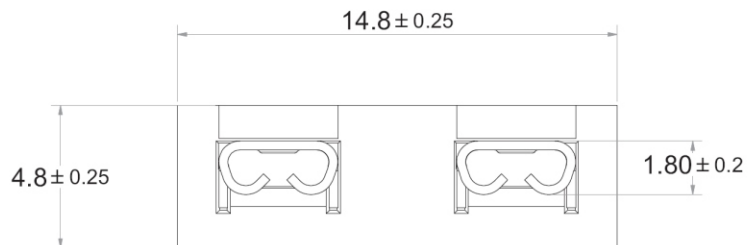

Recommend mounting hole

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.25
.XX ±
.XXX ±
ANG ± 2°

照片框

ORDER INFORMATION

FUAA2-SD-37-LF

SERIES T T LEADFREE
3.7mm
DIP 180°
FEMALE

DESCRIPTION: FUSE CLIP P.C.BOARD TYPE