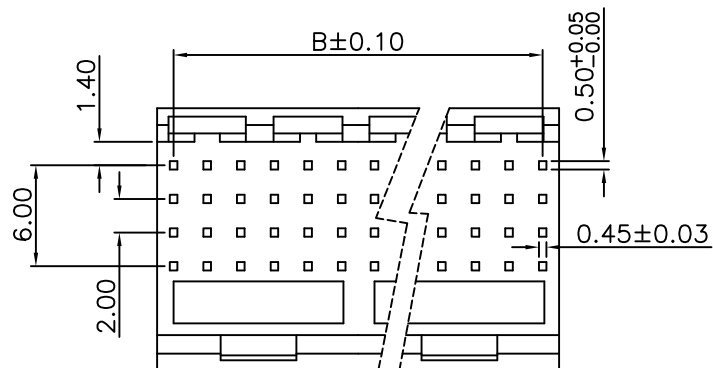


Material:

Housing: High Temperature Plastic UL94V-0.




Electrical Characteristics:

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.


Operating Temperature: -65°C~+125°C .

***RoHS Compliant**

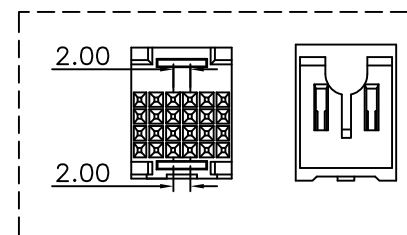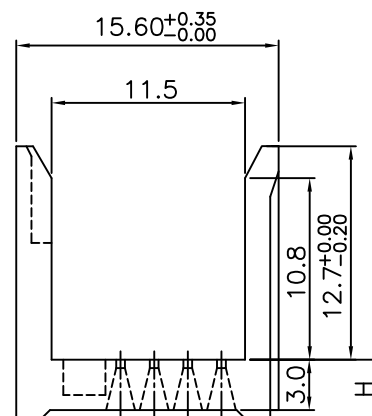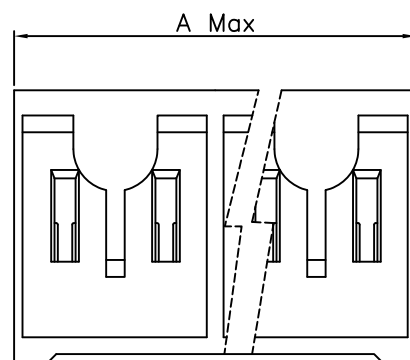

SCALE:1:2

H Length	H1	H2	H3
	3.50	4.40	6.90
Position	Dimension		
	A		B
24	11.95		10.00
48	23.95		22.00
72	35.95		34.00
96	47.95		46.00
120	59.95		58.00
144	71.95		70.00
168	83.95		82.00
192	95.95		94.00
216	107.95		106.00
240	119.95		118.00

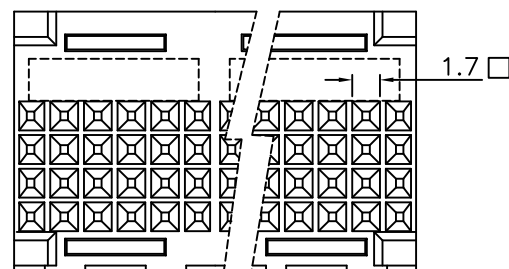

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FUB-PBxx-4Xxx-LF

SERIES

LEADFREE

4X06:24 WAY

4X60:240 WAY

03:HIGH 3.5mm

04:HIGH 4.4mm

06:HIGH 6.9mm

PLUG BASE

DESCRIPTION: Male 2.0mm Housing