

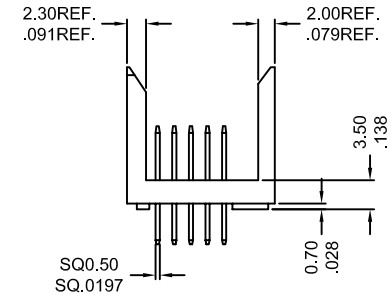

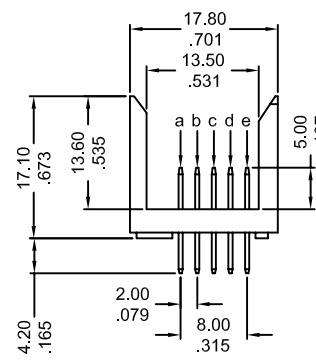



FEATURES:

- . 30,60,120,240 Circuits
- . Housing: Glass Filled LCP, UL 94V-0
- . Contact: Phosphor Bronze
- . style press-fit contact design provides 3kg of retention force and 5 points of contact for a gas-tight connection
- . Selective Gold-plated pins offer high reliability
- . Various pin lengths for sequential mating; various tail lengths to meet PCB layout keys
- . Code key insertion holes secure code keys
- . High-temperature material withstands wave soldering

SPECIFICATIONS:

- . Current rating: 1.0A
- . Voltage rating: 100V
- . Temperature range: -55°C ~+ 125°C
- . Contact resistance: A Row 25mΩ max.
B Row 35mΩ max.
C Row 40mΩ max.
D Row 45mΩ max.
E Row 50mΩ max.
- . Insulation resistance: 1000mΩ min.
- . Dielectric withstanding voltage: 750V AC
- . Press-fit Area: 1mΩ max.

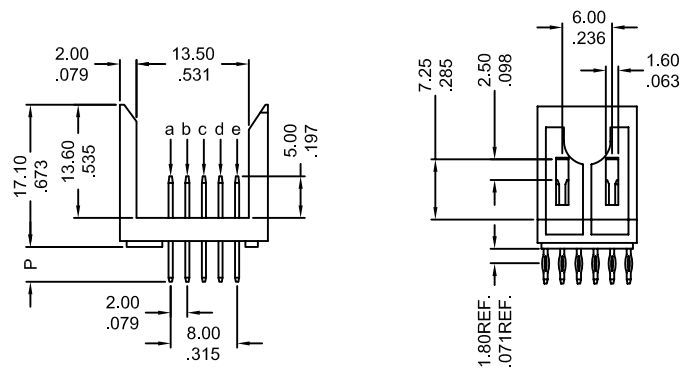

Press fit pin

Recommended P.C Board

Hole Layout

Thickness: $\frac{1.60}{.063}$ & $\frac{2.40}{.094}$

UNIT: MM
INCH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X, ±

UNIT / mm

SCALE 1 : 1

.XX, ±

DATE

.XXX, ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

FUB-PP0450-5X06-LF
SERIES | LEADFREE
30WAY
CONTACT 5.0mm
DIP 4.2mm
PRESS FIT
MALE

DESCRIPTION: .079" (2.00mm) Pitch Male Signal (Futurebus) Header

煜倫股份有限公司

www.morethanall.com