

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulation Resistance: 1000MΩ min. at DC 500V.


Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -55°C ~+125°C .


***RoHS Compliant**

Notes:

1. Contact Length is 5.75mm,Dip is 4.3mm: b, c row.
2. Contact Length is 6.5mm,Dip is 4.3mm: a,d ,e row

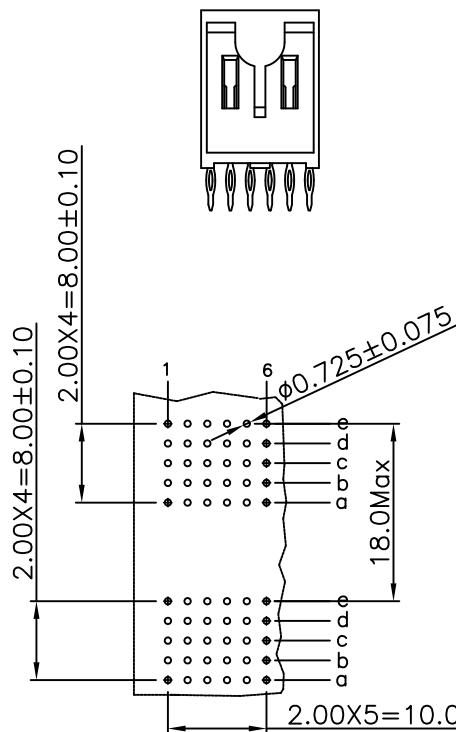

PCB Layout

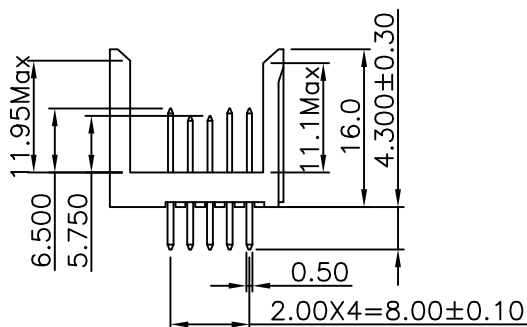

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FUB-PP045765B2A3-5X06-LF
SERIES | | | | | LEADFREE
30WAY
B.C/A.D.E PIN
MALE CONTACT 6.5mm
PRESS FIT CONTACT 5.75mm
DIP 4.3mm

DESCRIPTION: 2.0mm Futurebus(+) 5 Rows Male Straight Type