


Material:





Housing: Liquid Crystal Polymer(LCP) UL94V-0.
Contacts: Brass.

Electrical Characteristics:

Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000M Ω min. at DC 500V.
Contact Resistance: 30m Ω max. at DC 100mA.
Operating Temperature: -65°C ~ +125°C.



Section A-A'

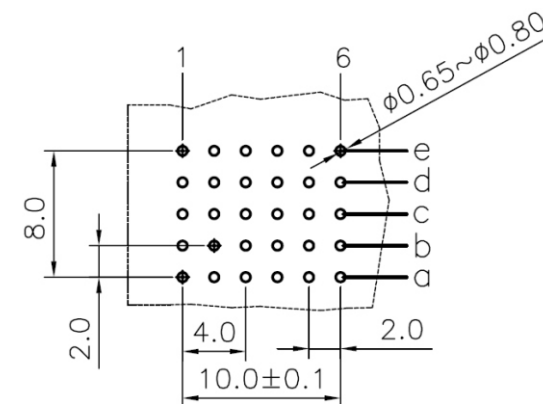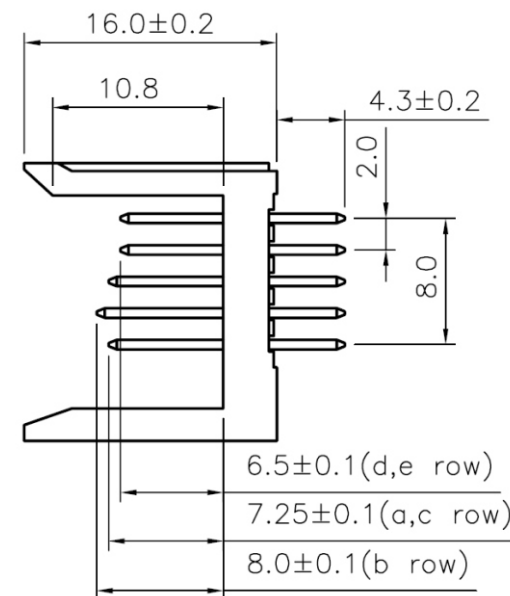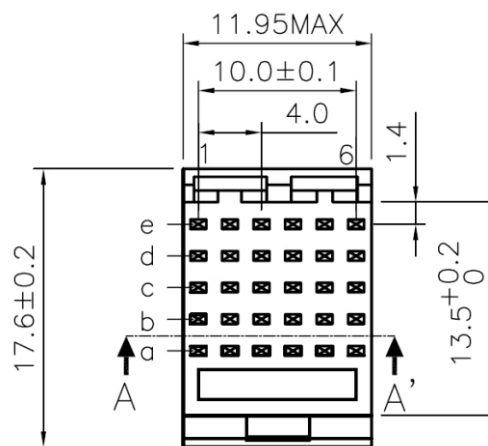

P.C.Board Layout
(Tolerance: ±0.05)

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FUB-PP0478766-5X06

DWG NO. FUB-PP0478766-5X06

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司