
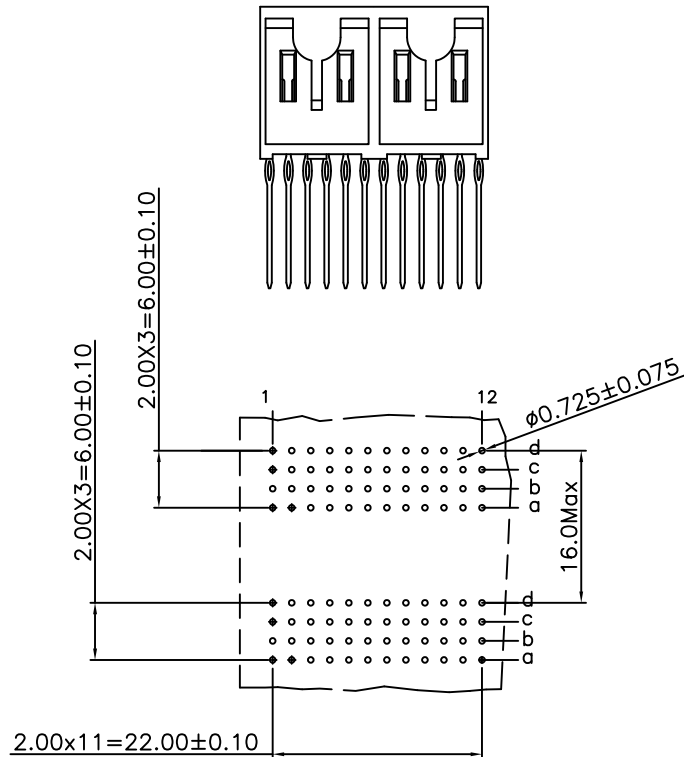
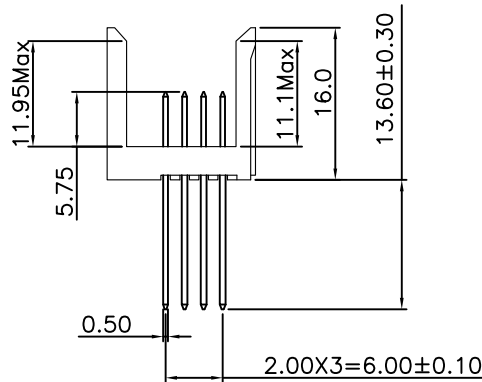
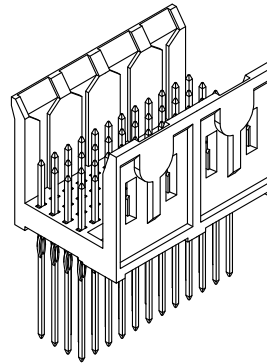


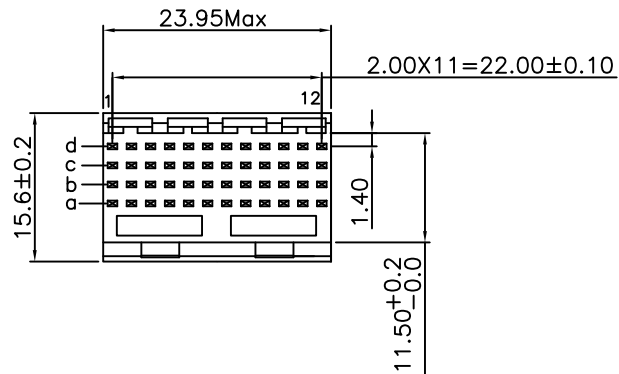

P.C. Board Layout

Material:

Housing: High Temperature Plastic UL94V-0

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -55°C~+125°C .

***RoHS Compliant**

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

FUB-PP1357-4X12-LF

SERIES

LEADFREE

48 WAY

DIP 13.6mm / CONTACT 5.75mm

PRESS FIT

MALE

DESCRIPTION: Male 2.0mm Press Fit Type

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com