
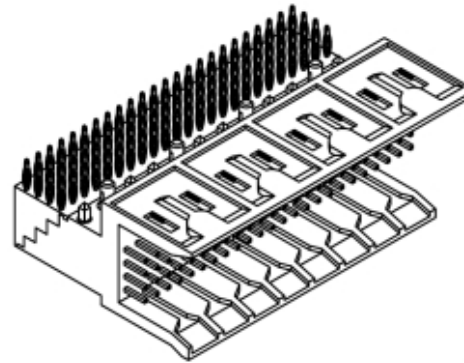




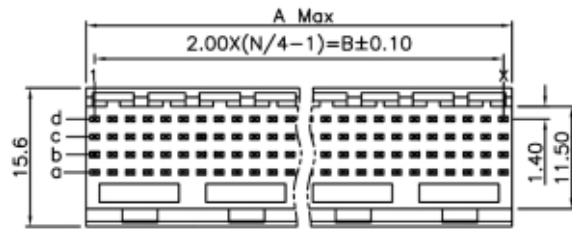


Material:


Housing: High Temperature Plastic UL94V-0.
Contacts: Brass.

Electrical Characteristics:


Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 30mΩ max. at DC 100mA.
Operating Temperature: -65°C ~+125°C .

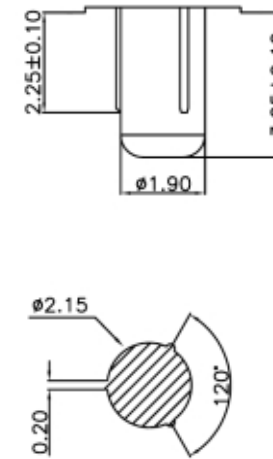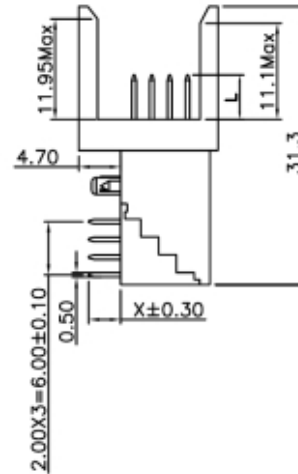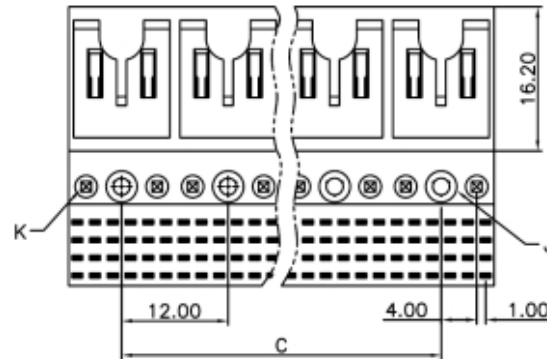

Detail: J

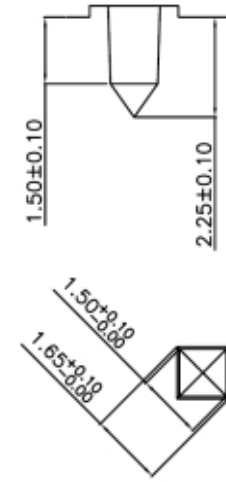

Detail: K

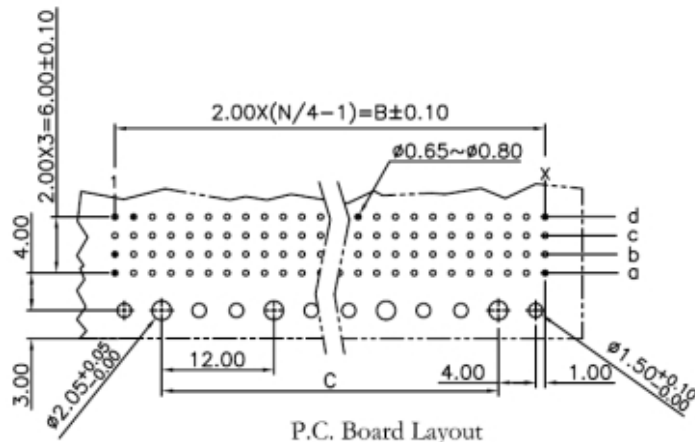

P.C. Board Layout

FUB-PQxyyy-4Xxx-LF
DIP LENGTH
02:2.90mm
03:3.53mm
LEADFREE
4X06:24/WAY
4X48:192/WAY
CONTACT LENGTH
50:5.00mm
57:5.75mm
65:6.50mm
72:7.25mm
80:8.00mm

TYPE NO.	L	DIP LENGTH(X)		
		1	2	2.90
Part NO.		A	B	C
24		11.95	10.0	0.0
48		23.95	22.0	12.0
72		35.95	34.0	24.0
96		47.95	46.0	36.0
120		59.95	58.0	48.0
144		71.95	70.0	60.0
168		83.95	82.0	72.0
192		95.95	94.0	84.0

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FUB-PQxyyy-4Xxx

DWG NO. FUB-PQxyyy-4Xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司