
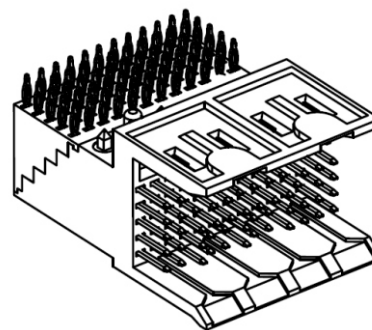
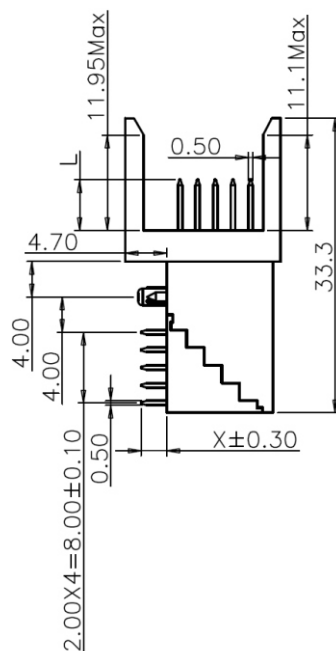


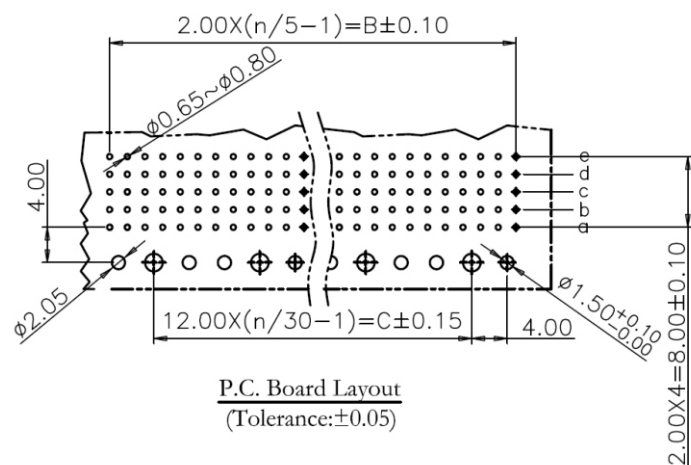



Material:

Housing: High Temperature Plastic UL94V-0.
Contacts: Brass.


Electrical Characteristics:

Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000M Ω min. at DC 500V.
Contact Resistance: 30m Ω max. at DC 100mA.
Operating Temperature: -65°C ~+125°C .

***RoHS Compliant**



DETAIL: I



DETAIL: K

Contact Length (L)	A	5.00		
	B	5.75		
	E	6.50		
	F	7.25		
	H	8.00		
Dip Length (X)	1	2		
	2.90	3.53		
Position (n)	Dimension			
	A	B	C	
30	11.95	10		
60	23.95	22		
90	35.95	34	24	
120	47.95	46	36	
150	59.95	58	48	
180	71.95	70	60	
210	83.95	82	72	
240	95.95	94	84	

FUB-PQ_{xyyy}-5X_{xx}-LF

DIP LENGTH
02:2.90mm
03:3.53mm

LEADFREE
5X06:30/WAY
5X48:240/WAY

CONTACT LENGTH
50:5.00mm
57:5.75mm
65:6.50mm
72:7.25mm
80:8.00mm

RoHS Compliant

TOLERANCES ARE

	.X ± 0.2
	.XX ± 0.1
	.XXX ±
	AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

--	--

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO ELIB-PO_{xyw}-5Y_{xy}

DWG NO. FUB-PQxxvv-5Xxx

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



煜倫股份有限公司