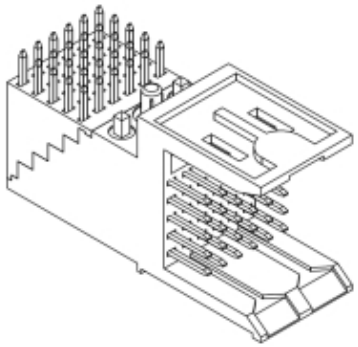

Material:

Housing: High Temperature Plastic UL94V-0.
Contacts: Brass.

Electrical Characteristics:

Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 30mΩ max. at DC 100mA.
Operating Temperature: -65°C ~+125°C .

***RoHS Compliant**

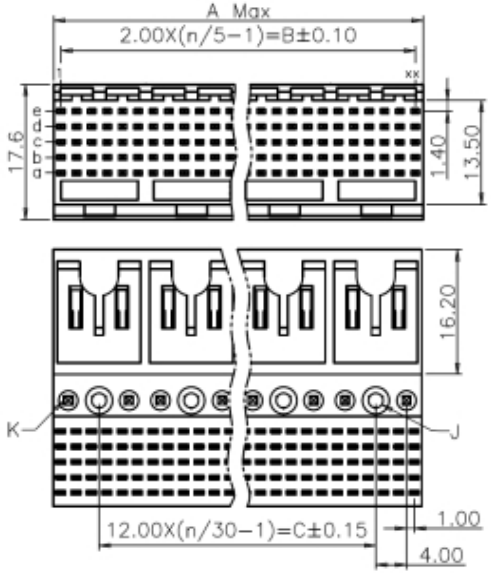

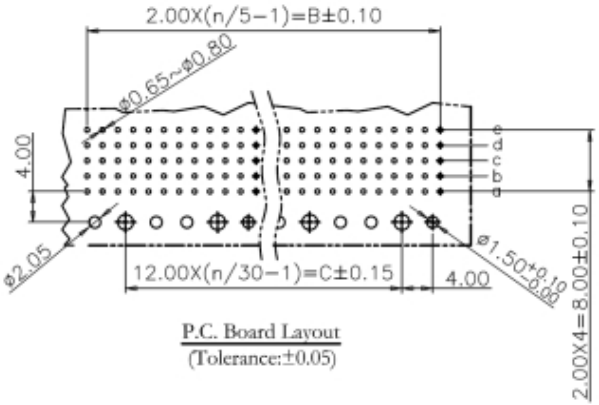

P.C. Board Layout
(Tolerance:±0.05)

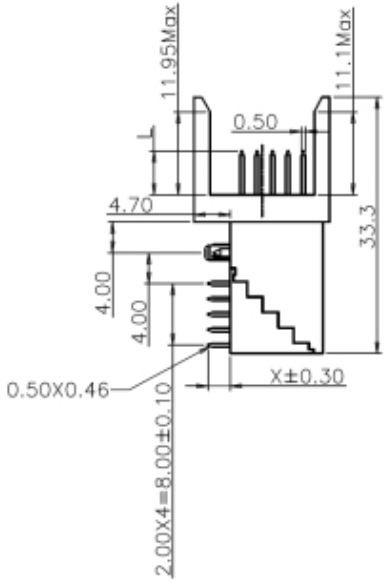

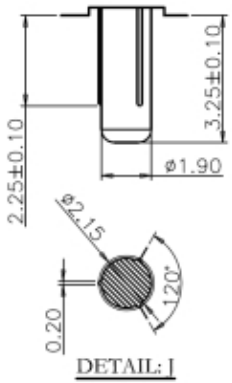

DETAIL: I

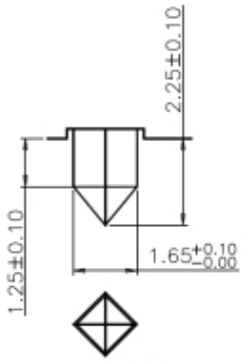

DETAIL: K

Contact Length (L)	A	5.00	
	B	5.75	
	E	6.50	
	F	7.25	
	H	8.00	
Dip Length (X)	1	2	
	2.90	3.53	
Position (n)	Dimension		
	A	B	C
30	11.95	10	
60	23.95	22	12
90	35.95	34	24
120	47.95	46	36
150	59.95	58	48
180	71.95	70	60
210	83.95	82	72
240	95.95	94	84

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
DATE		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

FUB-PRxxyy-5Xxx-LF

- SERIES
- MALE
- DIP 90°
- X: 02:2.90mm, 03:3.53mm
- L: 50:5.00mm, 57:5.75mm, 65:6.50mm, 72:7.25mm, 80:8.00mm
- 5X06:30WAY, 5X48:240WAY
- LEADFREE

DESCRIPTION: