

Material:

Housing: Hight Temperature Plastic UL94V-0

Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 1 AMP.




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.


Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -65°C ~+125°C .

***RoHS Compliant**

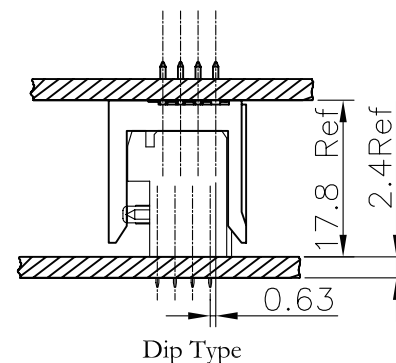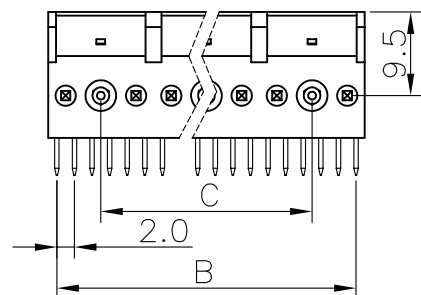

Board-to-Board Offset
Application Example

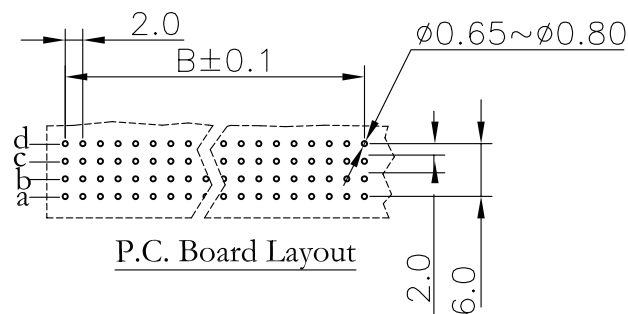

Position	Dimension		
	A	B	C
24	11.95	10.0	0
48	23.95	22.0	12.0
72	35.95	34.0	24.0
96	47.95	46.0	36.0
120	59.95	58.0	48.0
144	71.95	70.0	60.0
168	83.95	82.0	72.0
192	95.95	94.0	84.0
X Length	1	2	
	3.45	4.25	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ±


ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FUB-SDxx-4Xxx-LF

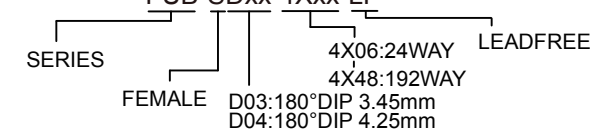

DESCRIPTION: Female 2.0mm Straight Type