




SPECIFICATION
MATERIAL
Insulator: Tmermal Plastic UL94V-0
Contacts: Copper Alloy
CONTACT PLATING
Underplate: 50u"~100u" Nickel
Contact area: 1u"~30u" Selective gold
Solder tails area: 100u"~200u" Tin/Lead(Brighten Tin) or
100u"~200u" Tin/Lead Free(Brighten Tin/Matte Tin)
ELECTRICAL
Operation voltage: 300 VDC Max.
Current rating: 1.0 Amps Max.
Contact resistance: 20 mohms Max.
Insulation resistance: 1000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1000 VAC / minute
Temperature range: -55°C TO +125°C

FUB-SlxxH-5X06-LF
LEADFREE
24:24 AWG
26:26AWG

RoHS Compliant

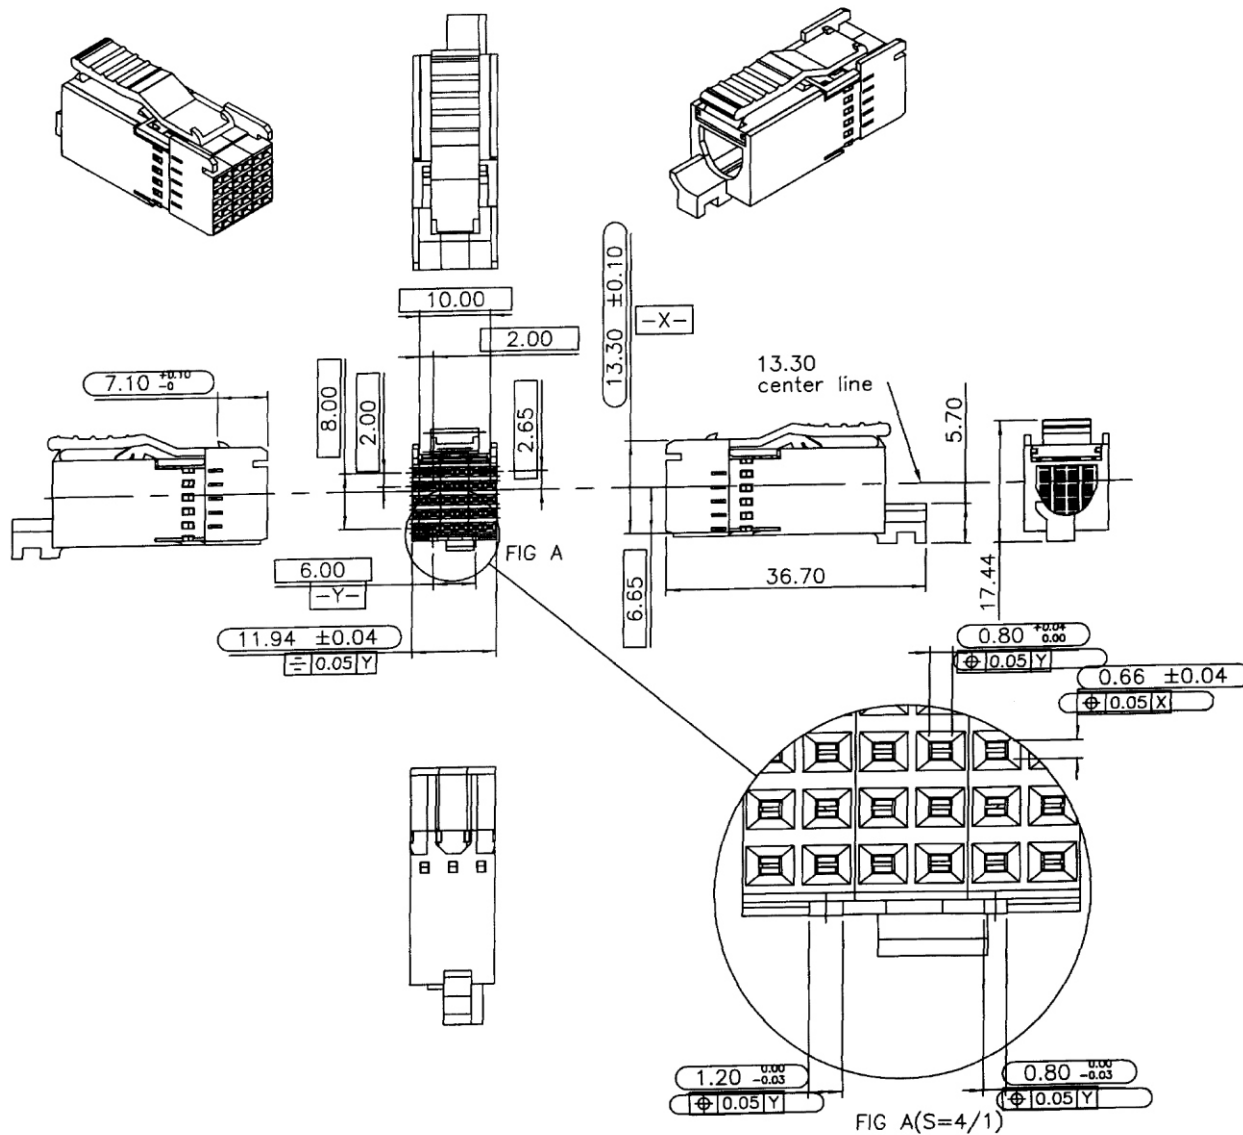

煜倫股份有限公司

PART NO. FUB-SlxxH-5X06								
DWG NO. FUB-SlxxH-5X06		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:				
FILE NO.		DRAWING BY						
UNIT / mm	SCALE 1 : 1	PROJECTION 		AREA	REVISIONS	HK	DATE	