


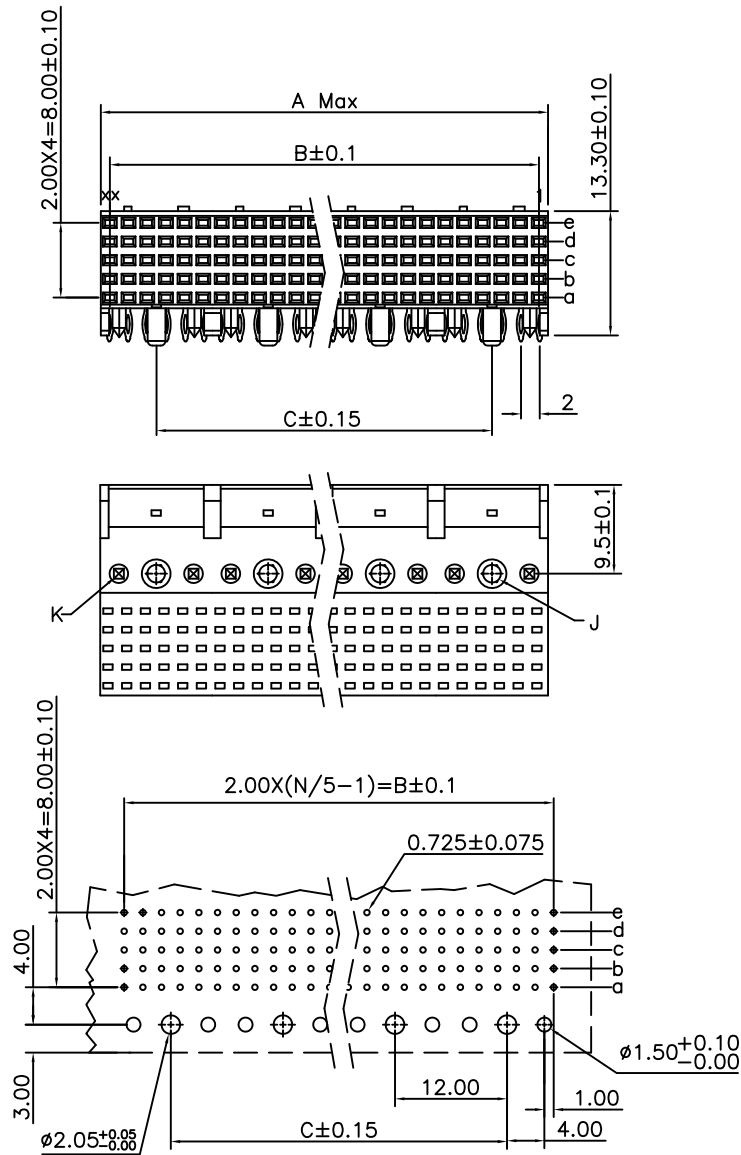



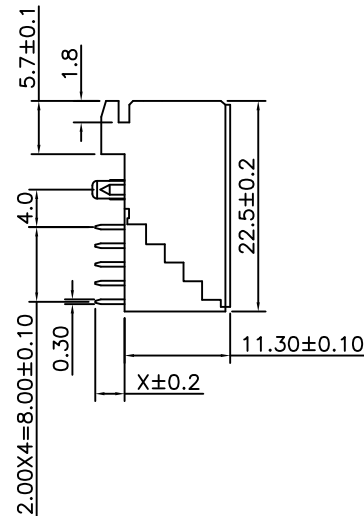


P.C. Board Layout

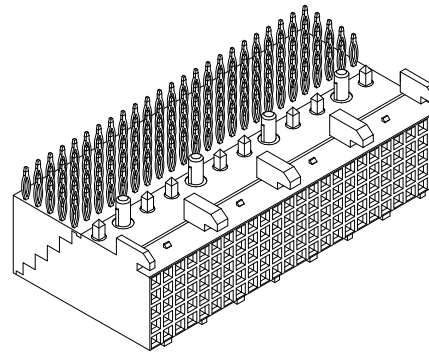

Detail K
(Scale 5 : 1)



Detail J
(Scale 5 : 1)



X Length	02	03	Dimension		
	2.90	3.53			
Position	A	B	C		
30	11.95	10	0		
60	23.95	22	12		
90	35.95	34	24		
120	47.95	46	36		
150	59.95	58	48		
180	71.95	70	60		
210	83.95	82	72		
240	95.95	94	84		
270	107.95	106	96		
300	119.95	118	108		
330	131.95	130	120		
360	143.95	142	132		
390	155.95	154	144		

Material:

Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 30mΩ max. at DC 100mA.
Operating Temperature: -65°C~+125°C .

*RoHS Compliant

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ± 0.50

CHECKED BY GENIUS

X, ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15


DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

FUB-SQxx-5Xxx-LF

SERIES

LEADFREE

02:2.90mm 5X06:30WAY

03:3.53mm 5X78:390WAY

90°PRESS FIT

FEMALE

DESCRIPTION: 2.0mm(0.079") Futurebus(+)5Rows Female Right Angle Type

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com