

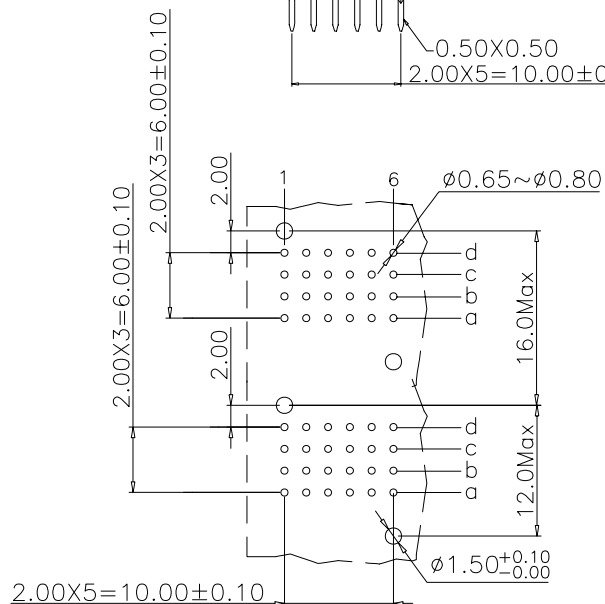
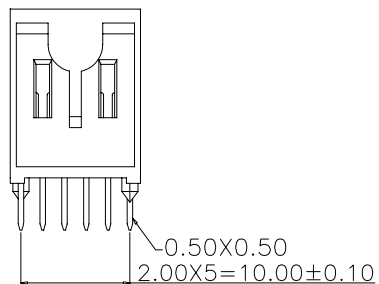





P.C.Board Layout

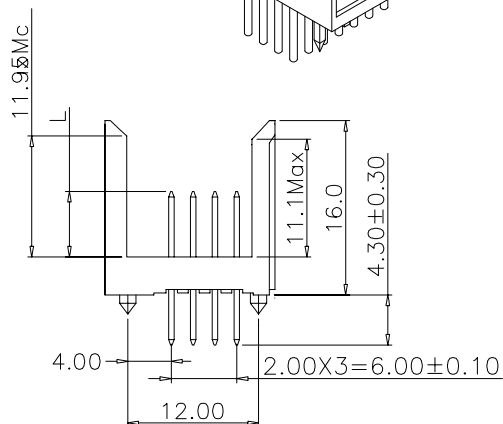

Dip Type

### Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Brass.

### Electrical Characteristics:

Current Rating: 3 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -65°C ~+125°C .

| P/N.            | L    |
|-----------------|------|
| FUP-PD0465-4X02 | 6.5  |
| FUP-PD0472-4X02 | 7.25 |
| FUP-PD0480-4X02 | 8.0  |

### RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±  
.X±  
.XX±  
.XXX±  
ANG±



### ORDER INFORMATION

FUP-PD04xx-4X02-LF  
SERIES | 8 WAY | LEADFREE  
MALE | 65:6.50mm  
DIP 180° | 72:7.25mm  
4.3mm | 80:8.00mm

DESCRIPTION: